


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

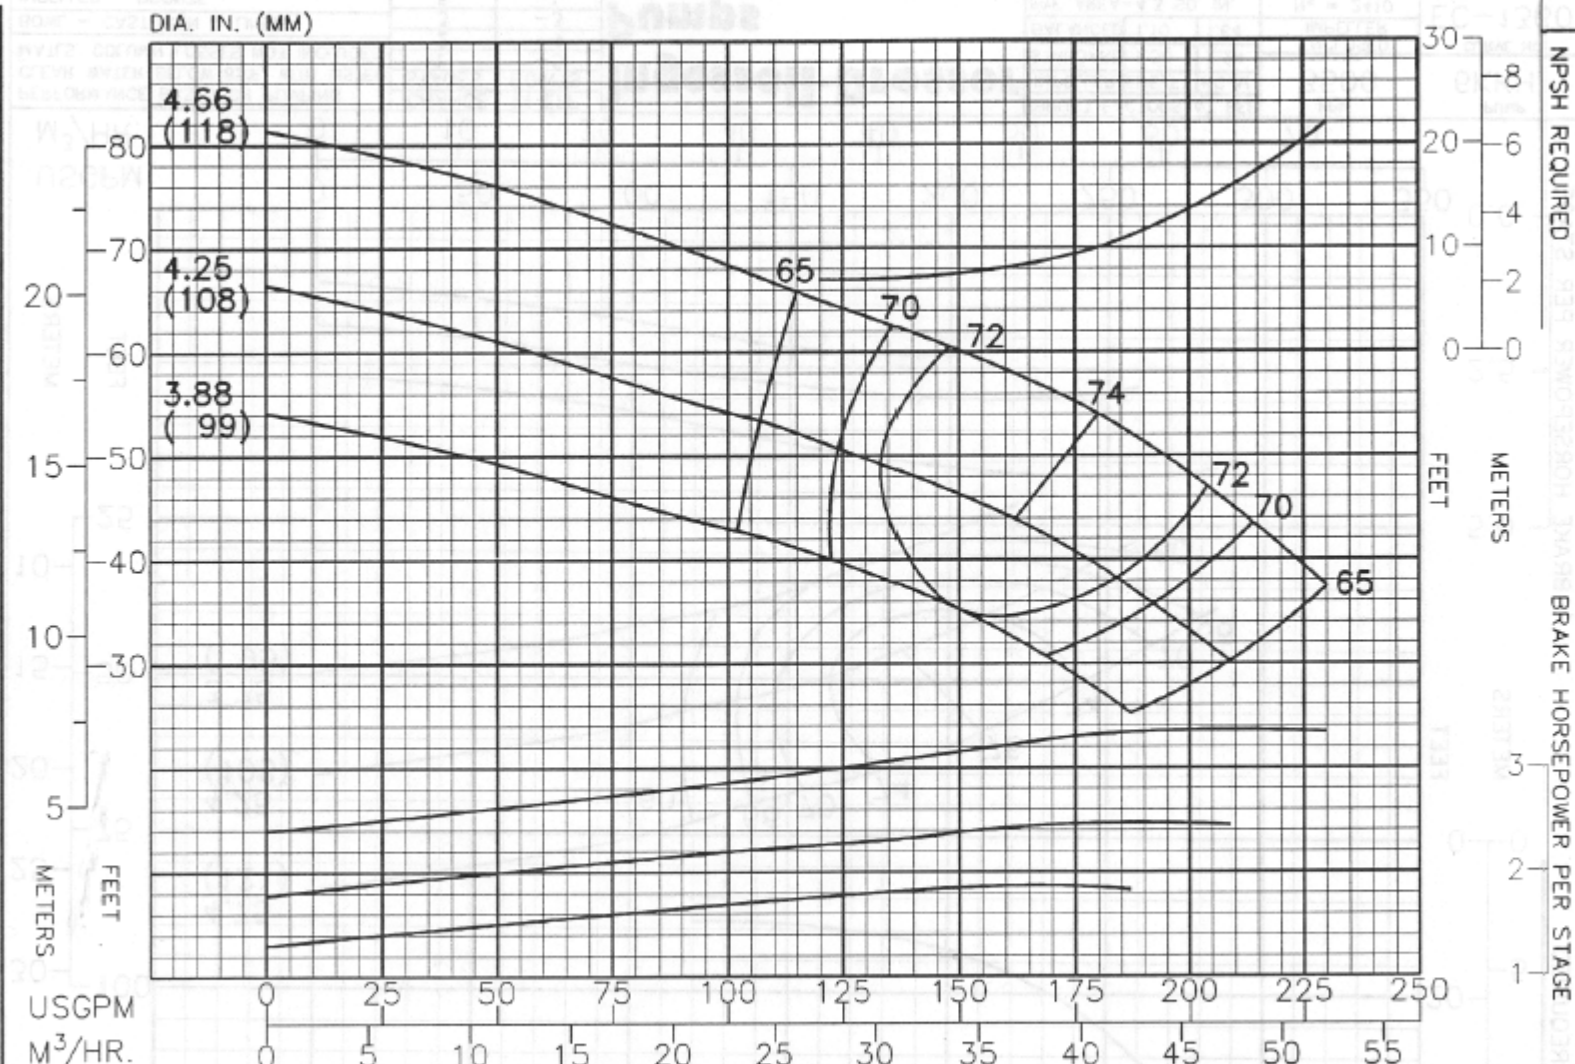

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-5
2	-4
3	-2
4	-1

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	2.10	3.10
BALANCED	1.10	1.64
Eye Area	4.32 SQ. IN.	

RPM	3500
ENCLOSED IMPELLER	
N _s	2360

PUMP	6KKL
CURVE NO.	EC-1450