


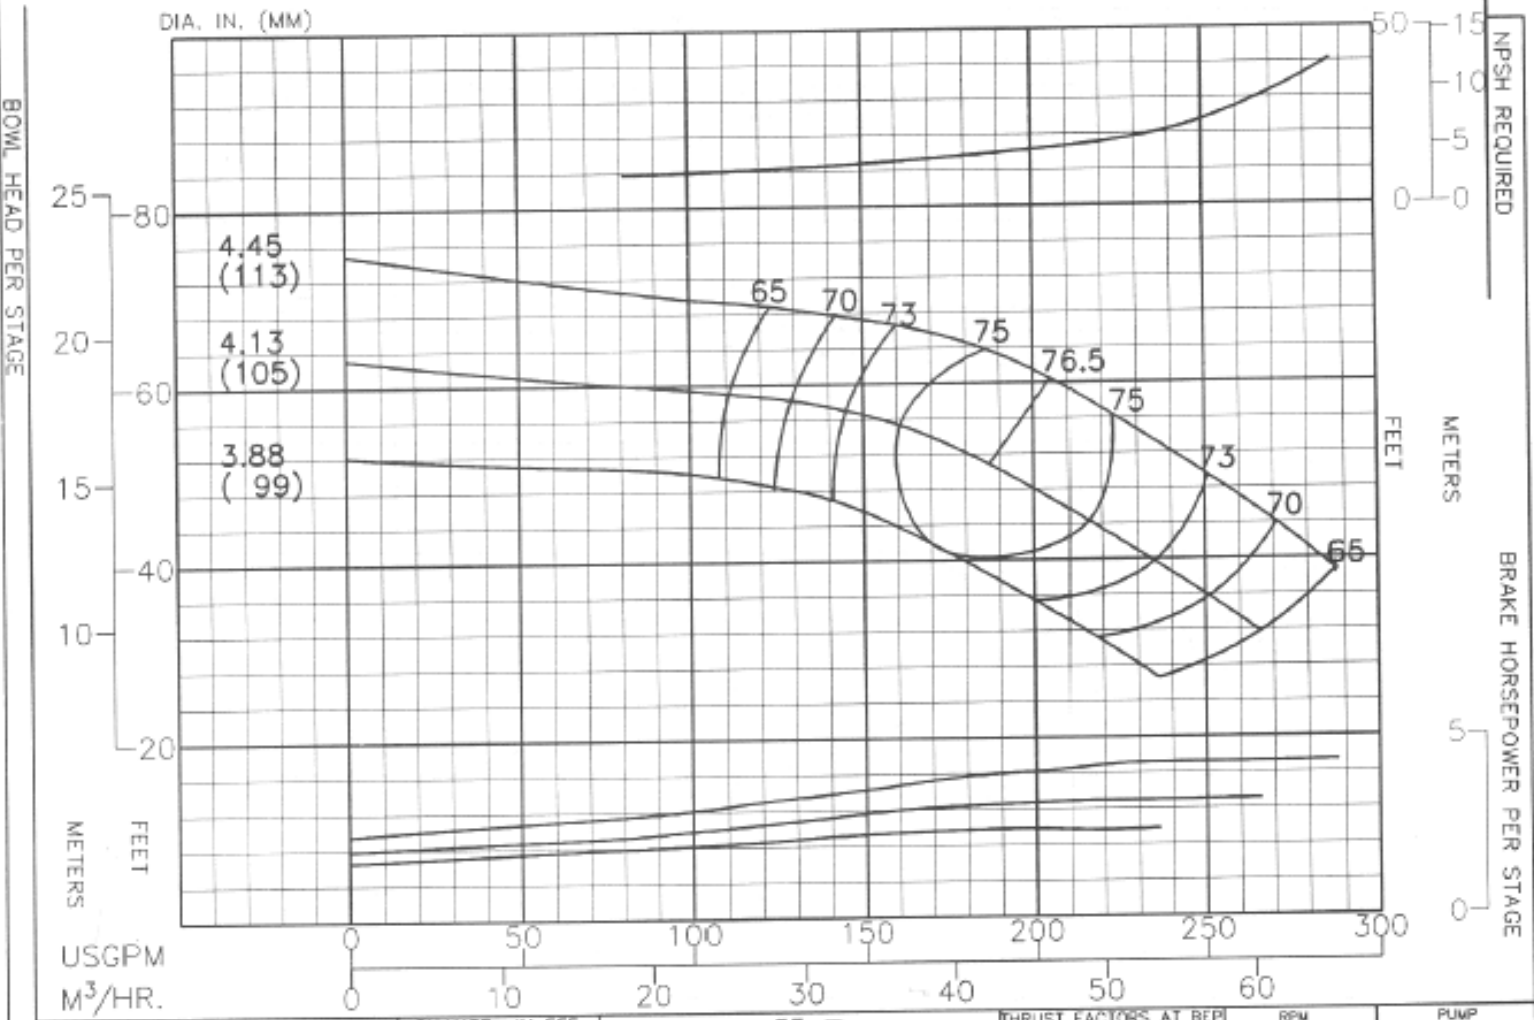

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.

CHANGES	IN EFF. POINTS
1	-4
2	-2.5
3	-1

BOWL - CAST IRON
IMPELLER - BRONZE

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP		RPM	PUMP
IMPELLER	LBS/FT KG/M	3550	6M11
STANDARD	1.45 2.16	ENCLOSED IMPELLER	CURVE NO. EC-2413
BALANCED	---		
EYE AREA - 4.12 SQ. IN.		N ₂ = 2360	