


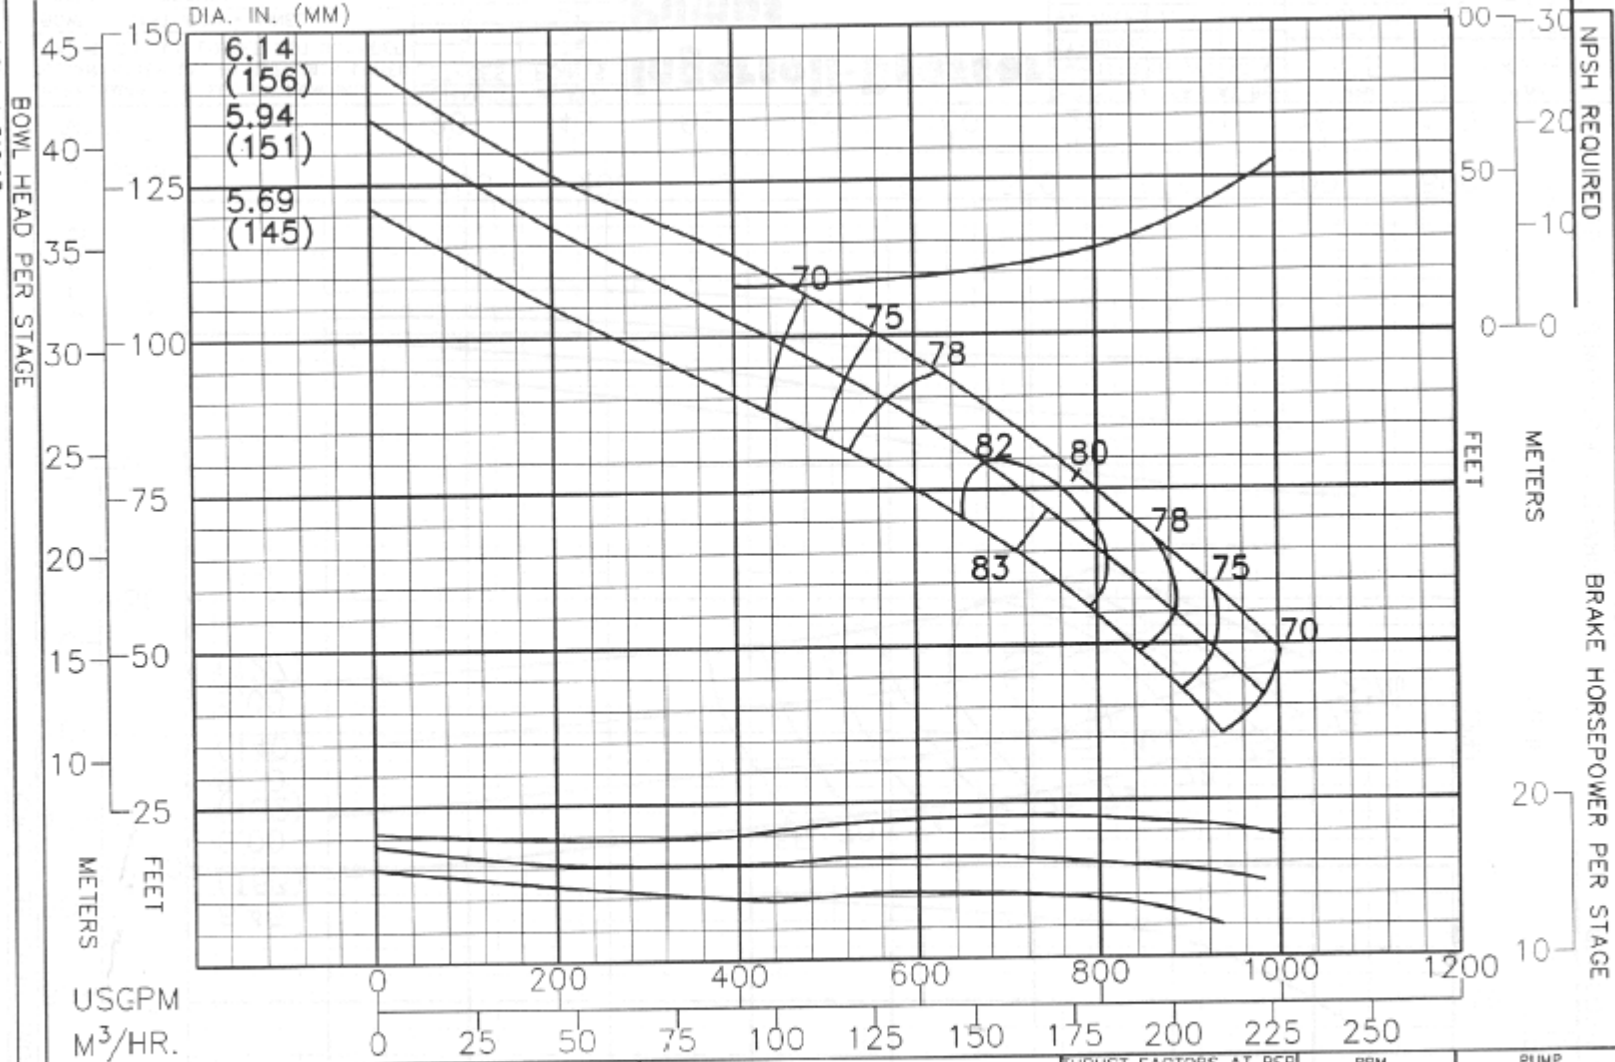

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-4
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS./FT	KG/M
STANDARD	4.34	6.47
BALANCED	---	---
EYE AREA- 12.1 SQ. IN.		

RPM
3550
ENCLOSED IMPELLER
N _s = 3800

PUMP
8H38
CURVE NO.
EC-2383