


BOWL HEAD PER STAGE

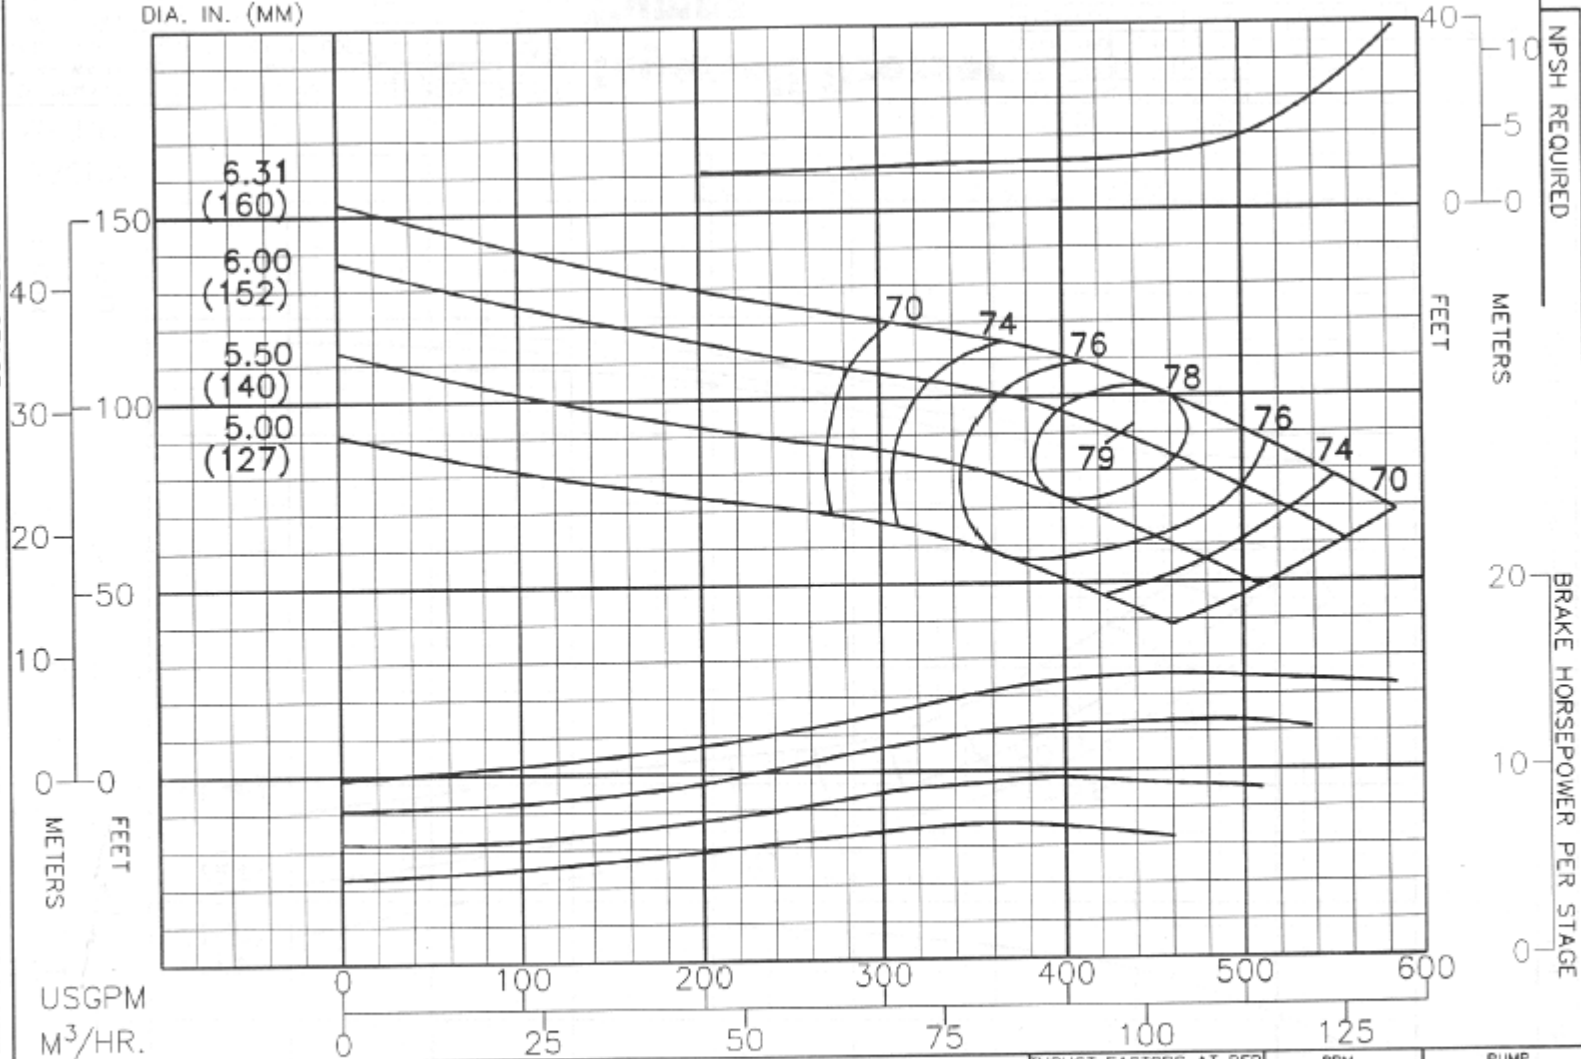

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	3.60	5.36
BALANCED	2.78	4.14
EYE AREA-8.12 SQ. IN.		

RPM	3550
ENCLOSED IMPELLER	
N _s = 2410	

PUMP	8KKL
CURVE NO.	EC-1382