


BOWL HEAD PER STAGE

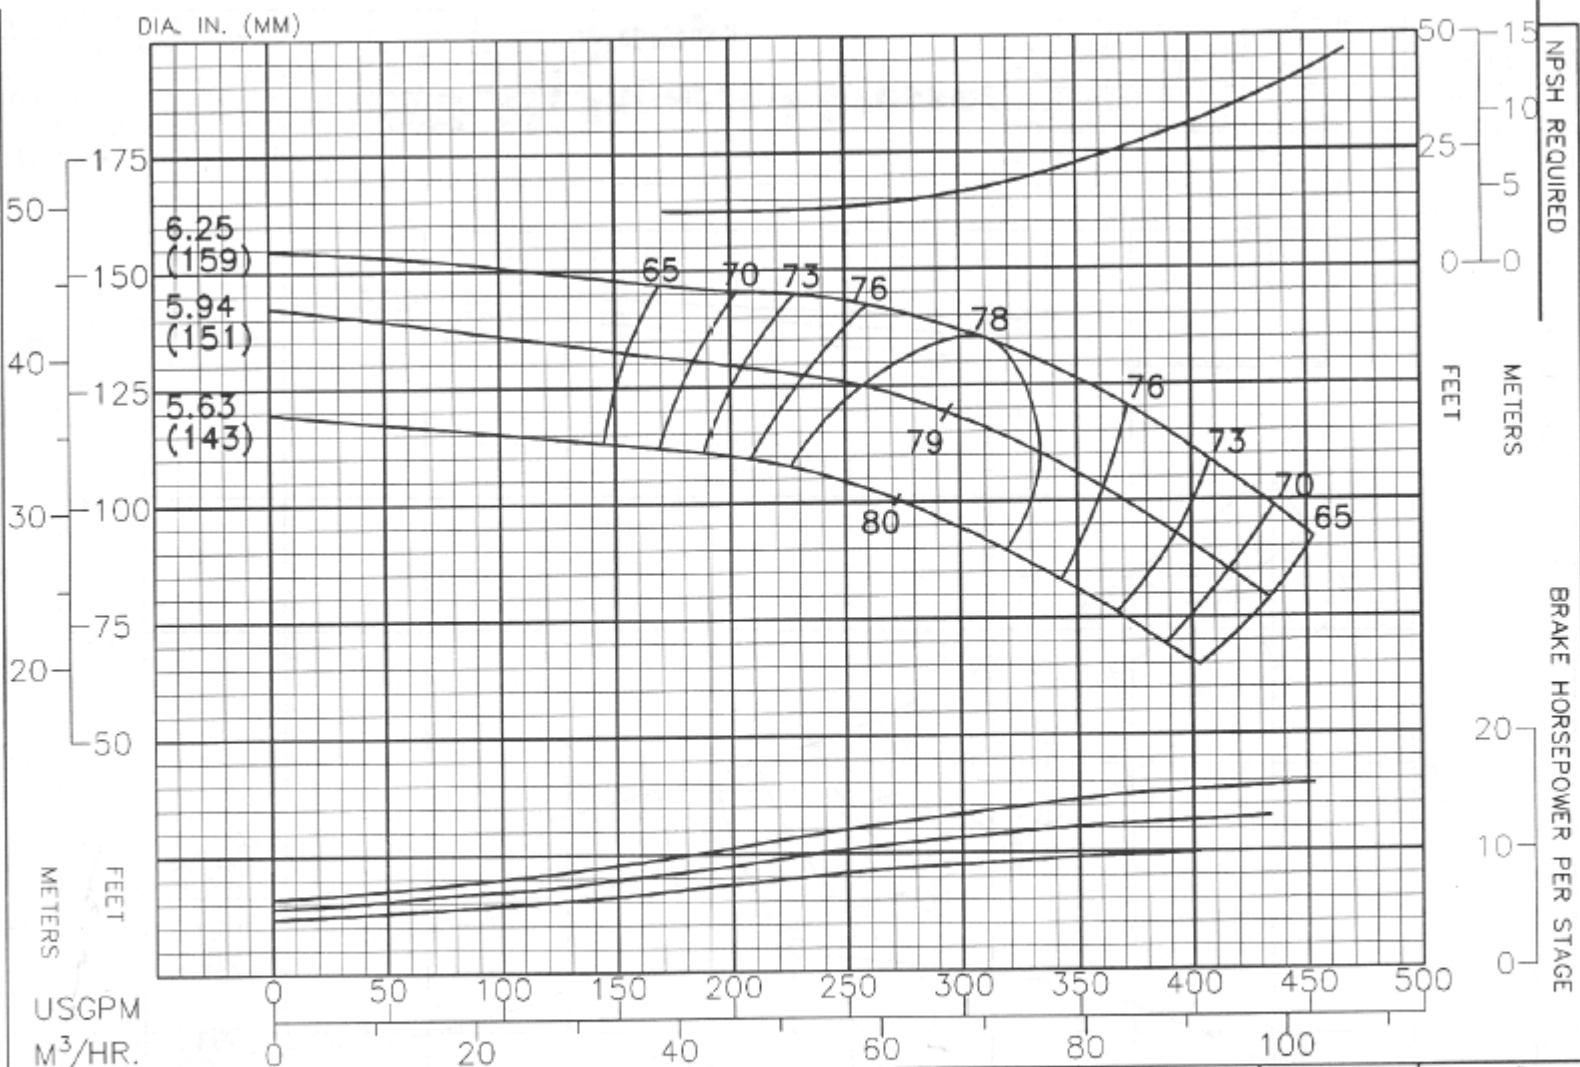

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGES	IN EFF.
STAGES	POINTS
1	-4.5
2	-2.5
3	-1

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	1.30	1.94
BALANCED	---	---
EYE AREA-	4.71	SQ. IN.

RPM
3550

ENCLOSED
IMPELLER

N_s = 1590

PUMP
8L15

CURVE NO.

EC-2353