


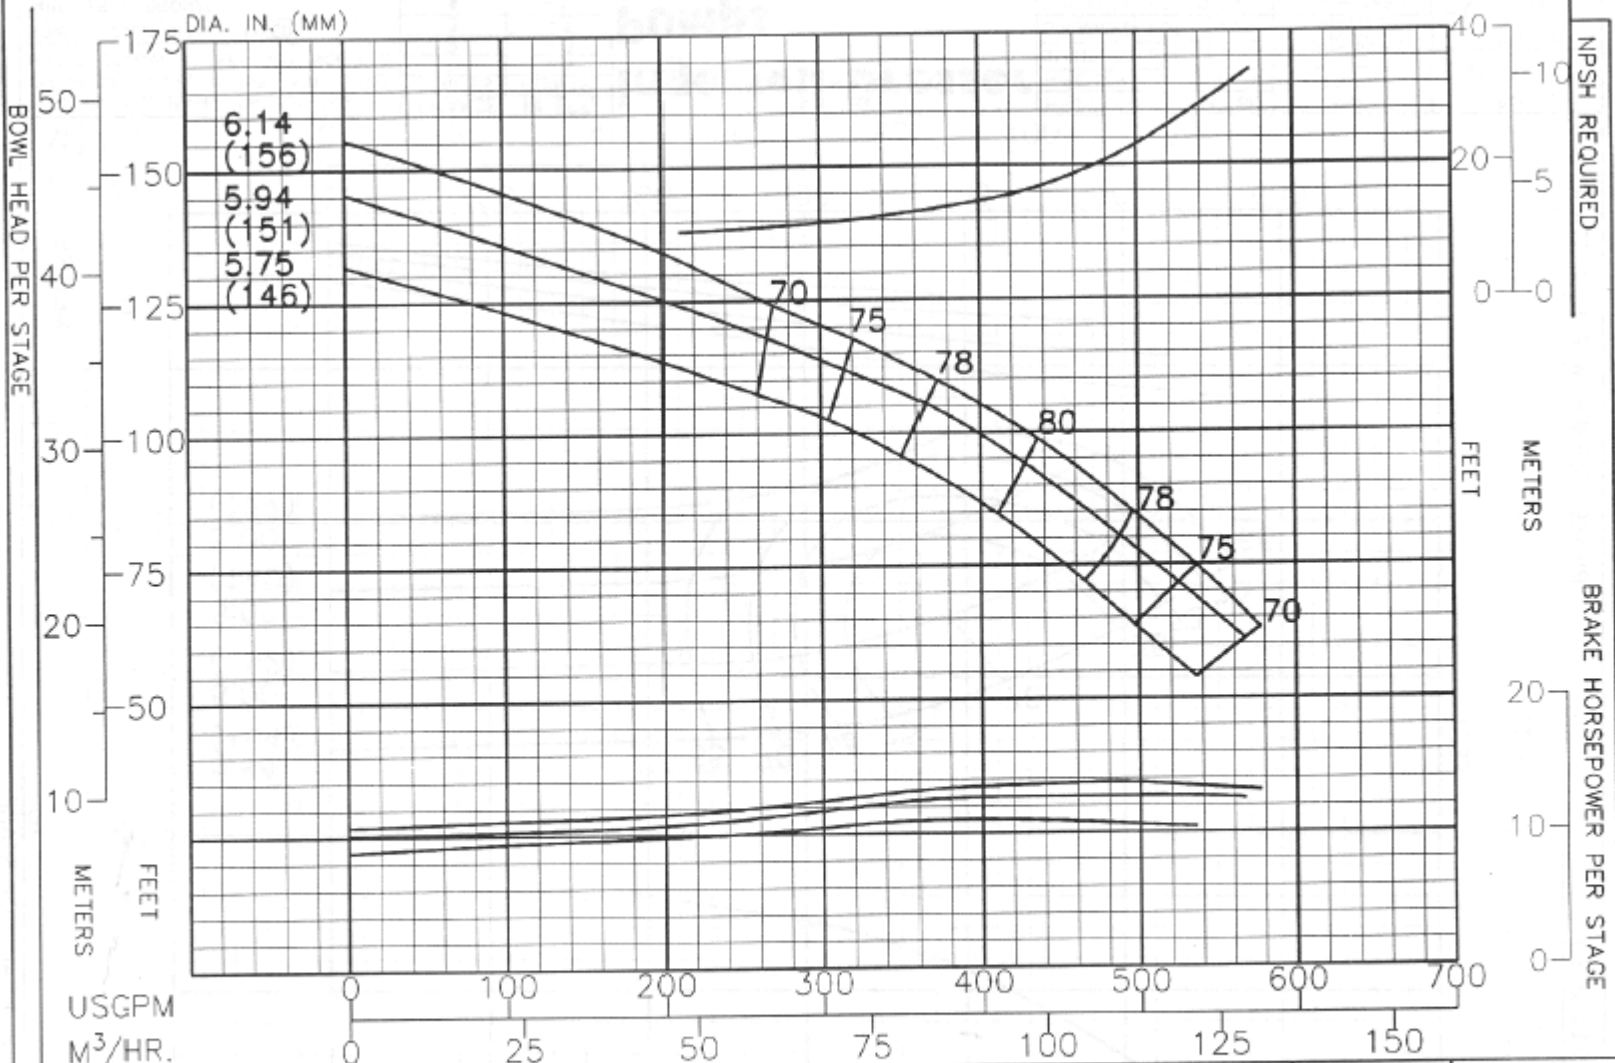

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-4.5
2	-2.5
3	-1

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 2.85	4.25
BALANCED ---	---
EYE AREA- 7.75 SQ. IN.	

RPM	3550
ENCLOSED IMPELLER	
N _s = 2360	

PUMP	8M23
CURVE NO.	EC-2363