


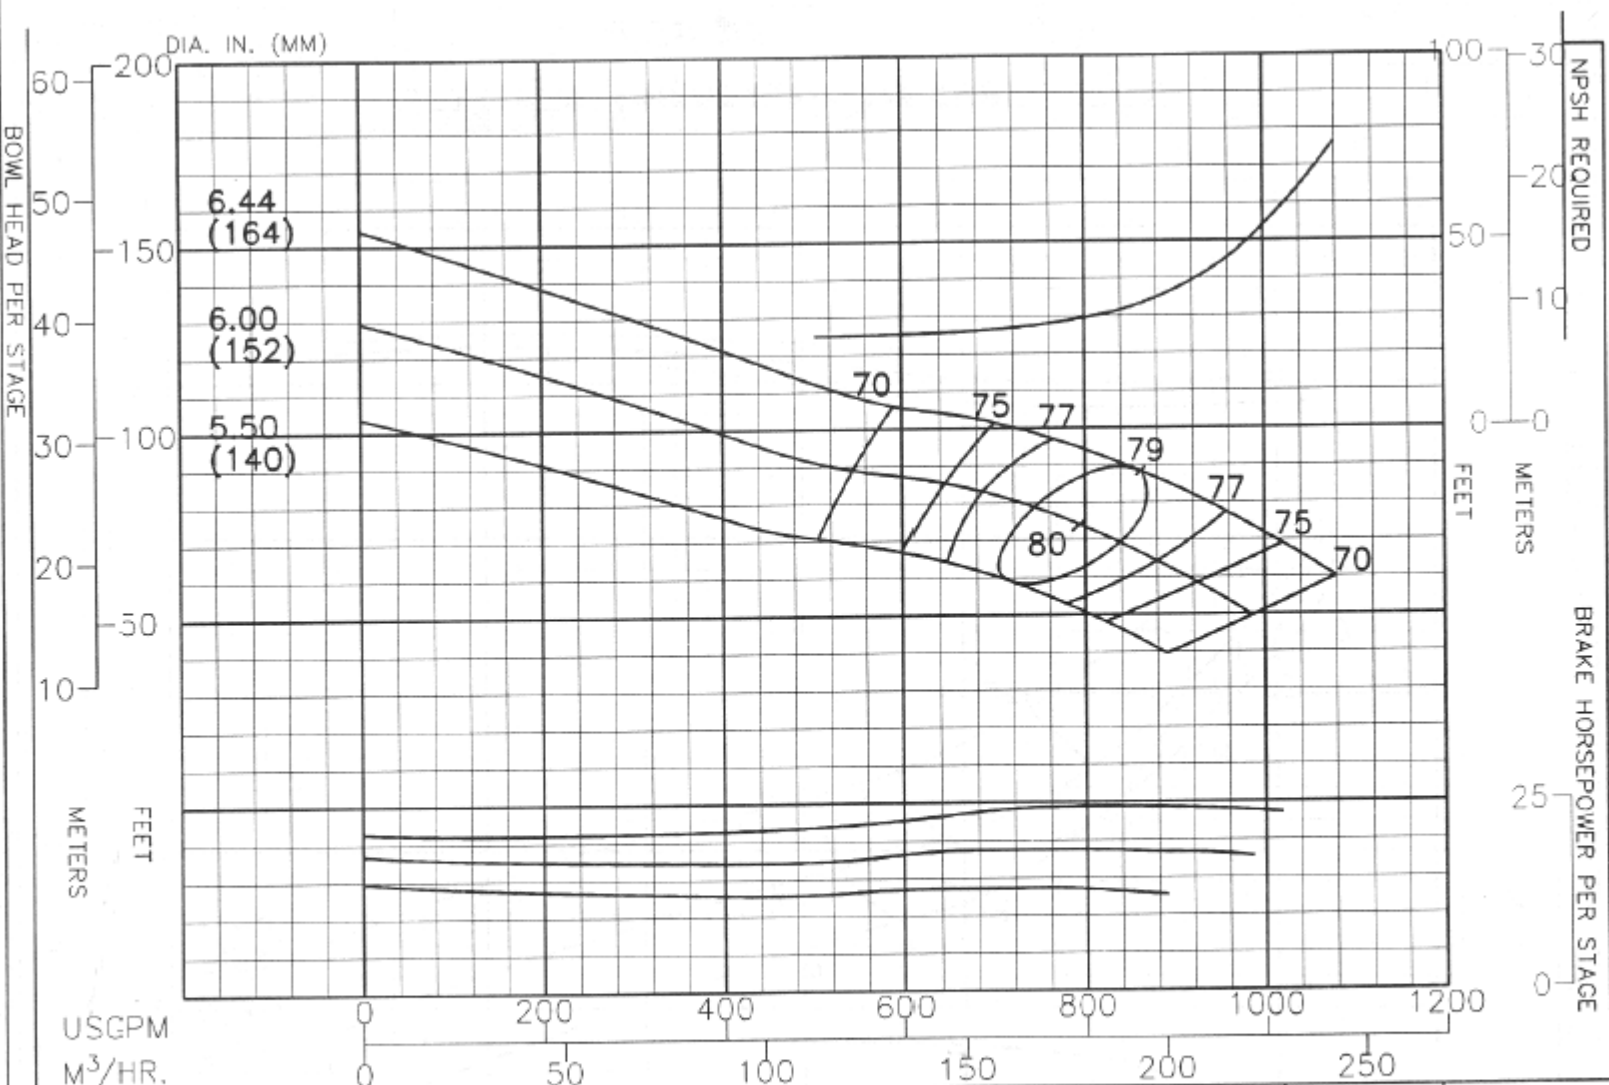

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATERIALS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	5.20	7.80
BALANCED	3.10	4.60
EYE AREA-11.3 SQ. IN.		

RPM	3550
ENCLOSED IMPELLER	
N _s	3620

PUMP	8NKL
CURVE NO.	EC-1385