
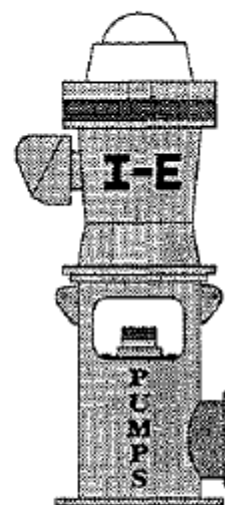


HEAD IN FEET

HORSEPOWER

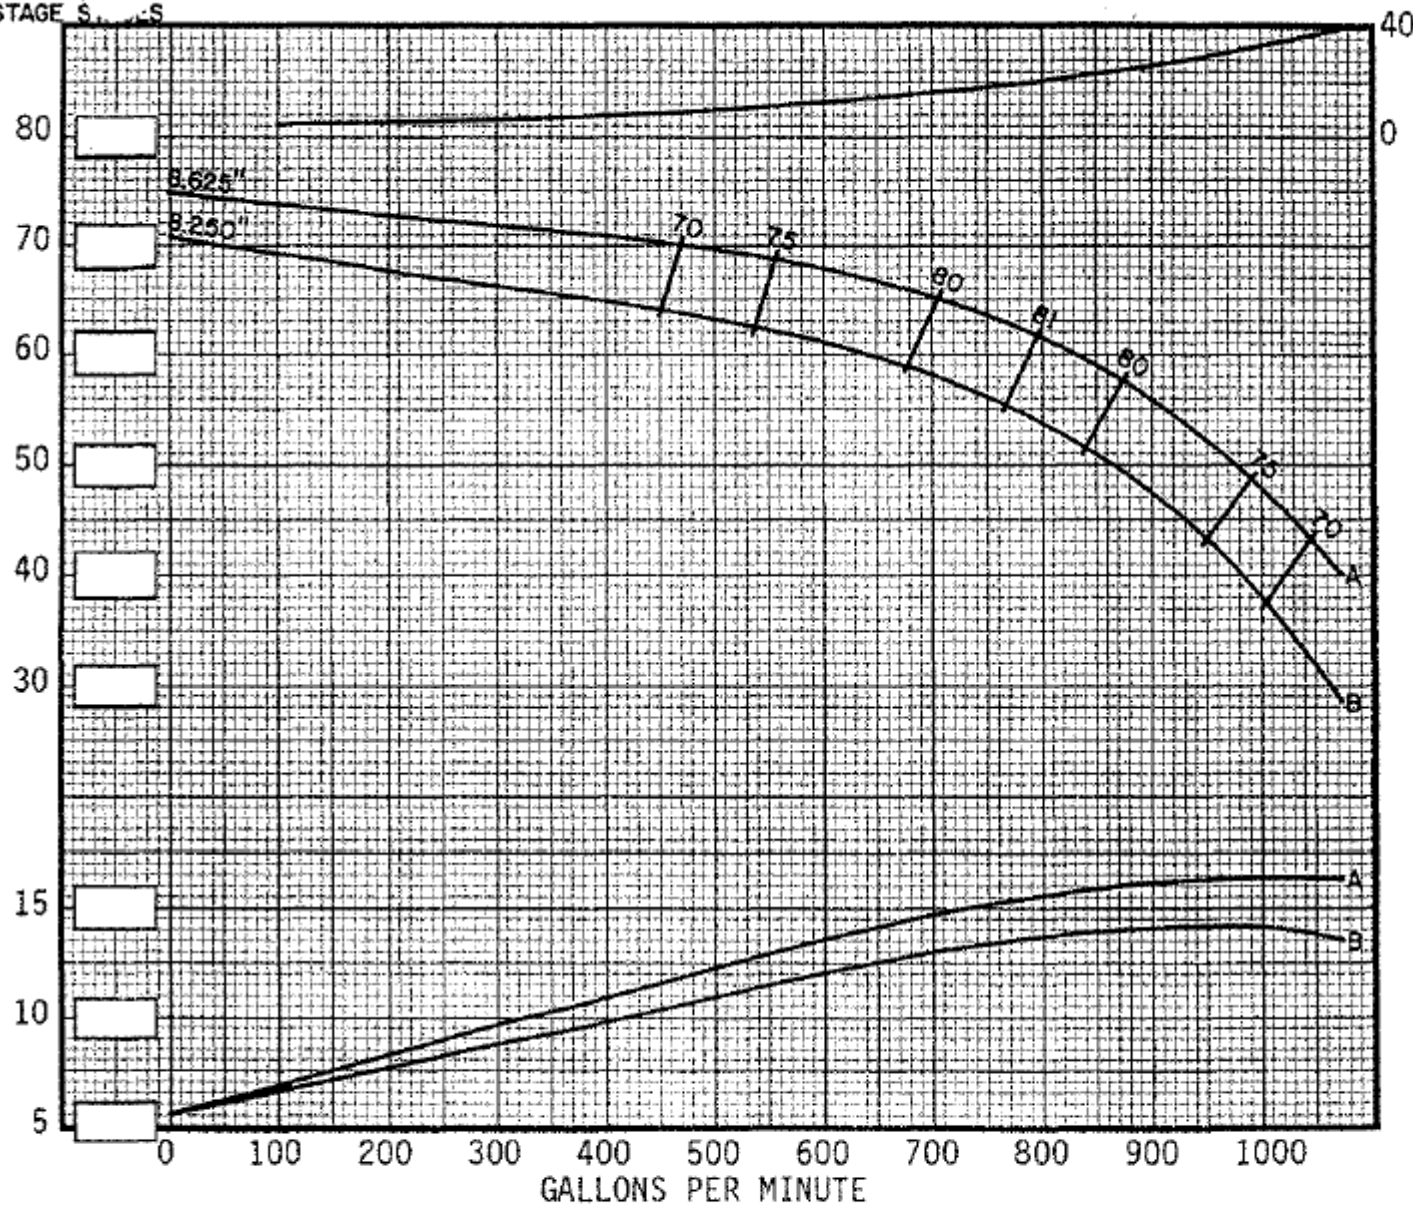

1567 E. HWY. 160
P.O. BOX 112
MONTE VISTA
COLORADO 81144

(719) 852-5174

I-E
"TOP-O-THE LINE"

11DH-800
DESIGN

1770
R.P.M.

SECTION N
PAGE 218
DATE 10-11-90

IMPELLER DATA

TRIM DIAMETER: A 8.625 " B 8.250 " C _____ " _____ " _____ " _____ "
One stage deduct -3 % 2 stage deduct -2 % 3 stage deduct -1 %
EFFICIENCY CORRECTION: 4 stage add 0 % 5 stage add 0 % _____ stage add _____ %
EFFECTIVE IMPELLER EYE AREA _____ sq. inches NUMBER OF IMPELLER VANES _____
THRUST CONSTANT (K) _____ Lbs./Ft. WR^2 (See Note 4) _____ Lbs. Ft.² MAXIMUM SPHERE SIZE _____ "
IMPELLER EYE FLUID VELOCITY CONSTANT (K_e) _____ IMPELLER PERIPHERAL SPEED CONSTANT (N_1) _____ (Ft./Sec.) _____ (Ft./Min.)

BOWL ASSEMBLY DATA

NOMINAL DIAMETER = 10.625 ", MINIMUM DIAMETER - 10.375 ", BELL DIAMETER 11.375 ", MIN. BELL DIAMETER 10.375 "
 MAXIMUM NO. STAGES (Std. Constr.) 9 MAXIMUM HEAD (Std. Constr.) 571 Ft.
 DIAMETER IMPELLER SHAFT 1.500 " MINIMUM IMPELLER SHAFT THREADS 1 "
 LATERAL (See explanation below)* NOMINAL " MINIMUM " STANDARD .812 " MAXIMUM "
 WEAR RING CLEARANCE (Nominal) .012 " SHAFT / BEARING CLEARANCE (Nominal) .007 "
 FORMULAS: HYDRAULIC THRUST = K Factor x Laboratory Head in feet = 247 lbs.

IMPELLER PERIPHERAL SPEED (U_2) = N_1 Constant $\times$ Impeller Diameter _____ Ft./Sec. or 3974 Ft./Min.
IMPELLER EYE FLUID VELOCITY (V_1) = K Constant $\times$ GPM = _____ Ft./Sec.

NOTE @ = per impeller. WR^2 includes impeller, impeller collar, and a stage length of impeller shaft

NOTE * = see lateral definition on Page 8.1, Section 2.1, dated 2/15/63.

NOTE - NOMINAL PROJECTIONS ARE: SHAFT = 14 Tube = 6
(referenced pipe butt or flange face)

- A - Length one-stage assembly / threaded suction
- B - Length one-stage assembly / bell suction
- C - Additional stage length
- D - Bowl diameter
- E - Bell diameter
- F - Projection of bearing hub / bell suction
- G - O.D. bell suction basket strainer
- J - Basket length below bell suction lip
- K - Minimum required submergence, above bottom of bearing hub
- L - Bottom of bearing hub to impeller eye
- M - Pipe butt to top bowl flange
- N - Column pipe (flange to bowl flange
- P - Suction case (or coupling) thread engagement
- R - Suction case flange diameter
- S - Flange to flange / bowl to column

APPLICABLE DIMENSIONS

DIMENSION	A	B	C	D	E	F	G	J	K	L	M	N	P	R	S
INCHES	24.375	27.875	8.5	10.625	11.375	0	12.375	10	14						

