


ONE
STAGE SIZES

HEAD IN FEET


HORSEPOWER

NPSHR
20
0

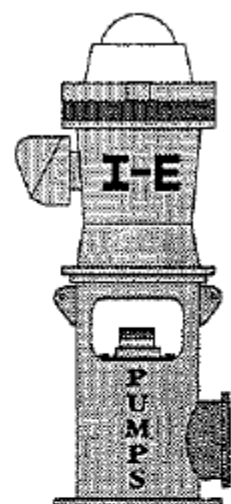

1567 E. HWY. 160
P.O. BOX 112
MONTE VISTA
COLORADO 81144

(719) 852-5174

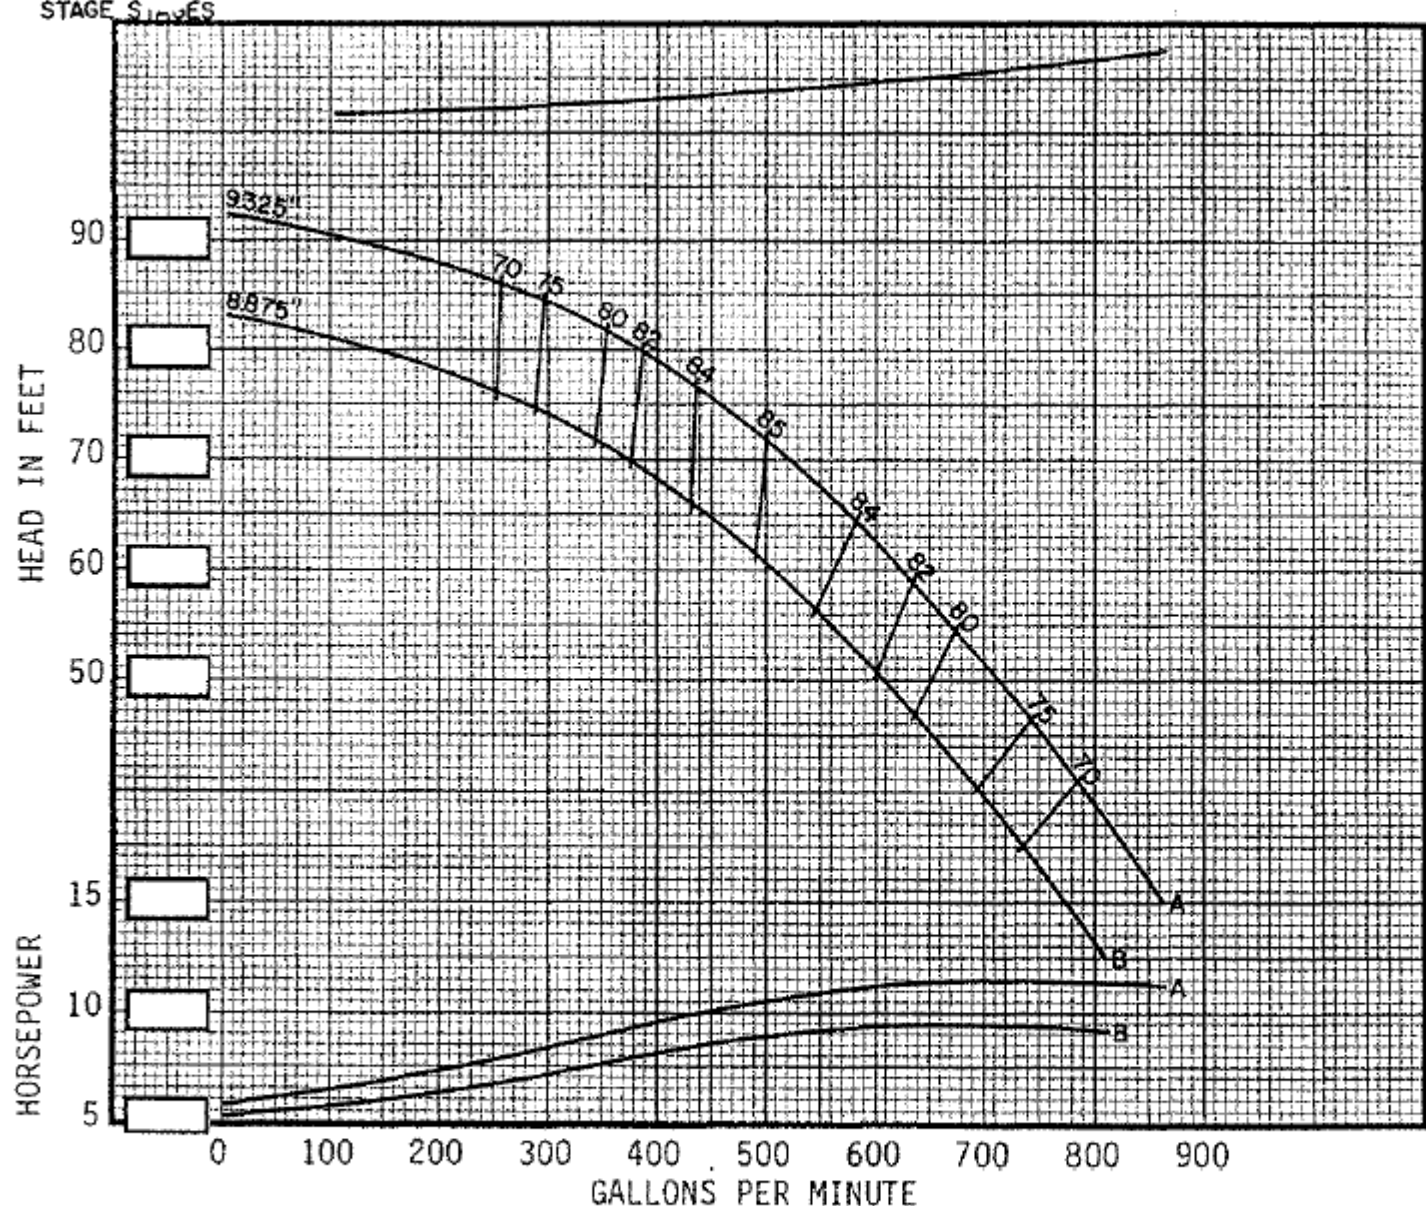

I-E

"TOP-O-THE LINE"

12CL-500
DESIGN

1770
R.P.M.

SECTION N
PAGE 220
DATE 10-11-90

IMPELLER DATA

TRIM DIAMETER: A 9.325 " B 8.875 " C " " " "
One stage deduct -3 %, 2 stage deduct -2 %, 3 stage deduct -1 %.
EFFICIENCY CORRECTION: stage add %, stage add %, stage add %.
EFFECTIVE IMPELLER EYE AREA 16.31 sq. inches NUMBER OF IMPELLER VANES
THRUST CONSTANT (K) 6.4 Lbs./Fr. WR^2 (See Note #) .642 Lbs. Ft.² MAXIMUM SPHERE SIZE .656 "
IMPELLER EYE FLUID VELOCITY CONSTANT (K_e) IMPELLER PERIPHERAL SPEED CONSTANT (N_e) (Ft./Sec.) (Ft./Min.)

BOWL ASSEMBLY DATA

NOMINAL DIAMETER = 11.625" , MINIMUM DIAMETER - 11.375" , BELL DIAMETER 11.375" , MIN. BELL DIAMETER 10.375" .
 MAXIMUM NO. STAGES (Std. Constr.) 3 MAXIMUM HEAD (Std. Constr.) 587 Ft.
 DIAMETER IMPELLER SHAFT 1.6875" MINIMUM IMPELLER SHAFT THREADS _____"
 LATERAL (See explanation below)* NOMINAL _____" , MINIMUM _____" , STANDARD .687" , MAXIMUM _____"
 WEAR RING CLEARANCE (Nominal) .012" , SHAFT / BEARING CLEARANCE (Nominal) .007" ,
 FORMULAS: HYDRAULIC THRUST = K Factor x Laboratory Head in feet = _____ Lbs.
 IMPELLER PERIPHERAL SPEED (U_2) = N_1 Constant x Impeller Diameter _____ Ft./Sec. or _____ Ft./Min.
 IMPELLER EYE FLUID VELOCITY (V_e) = K_e Constant x GPM = _____ Ft./Sec.
 NOTE @ = per impeller. WR² includes impeller, impeller collet, and a stage length of impeller shaft
 NOTE * = see lateral definition on Page 8.1, Section 2.1, dated 2/15/63.
 NOTE - NOMINAL PROJECTIONS ARE: SHAFT = 14" , Tube = 6"
 (referenced pipe butt or flange face)

A - Length one-stage assembly / threaded suction
 B - Length one-stage assembly / bell suction
 C - Additional stage length
 D - Bowl diameter
 E - Bell diameter
 F - Projection of bearing hub / bell suction
 G - O.D. bell suction basket strainer
 J - Basket length below bell suction lip
 K - Minimum required submergence, above bottom of bearing hub

APPLICABLE DIMENSIONS

[illegible]