
PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. IMPELLER PATTERN NO.	THRUST CONSTANT 35 WR² 42 LB. FT²/STAGE	PUMP SHAFT DIAM. 3-3/16 INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 25"

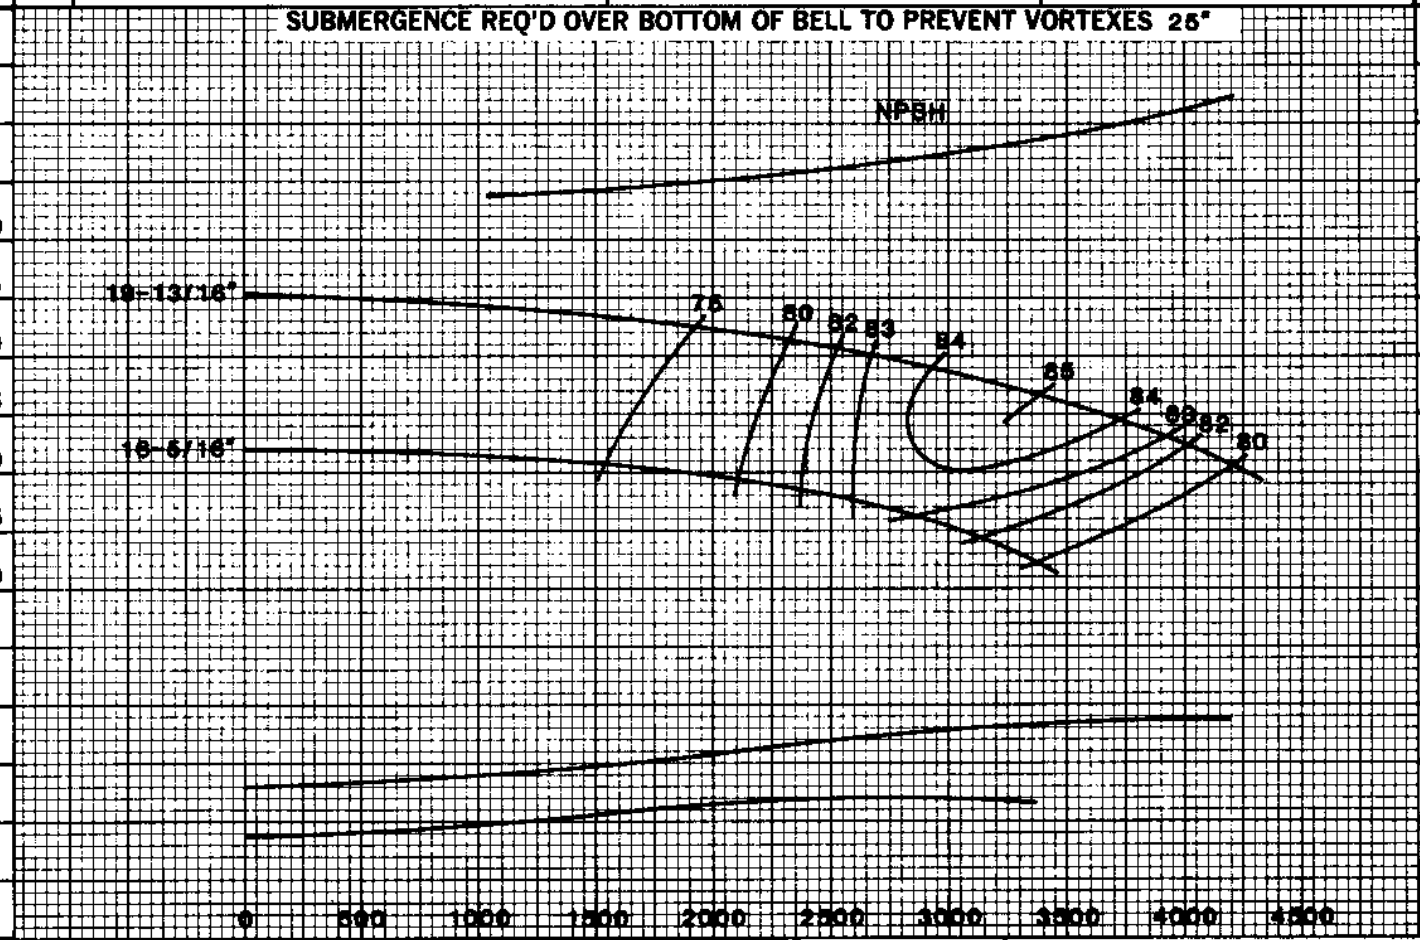

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR [ ] STAGES MULTIPLY HD. & EFF. BY
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

25 DLC TURBINE PUMP 1180 RPM
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2179

JP 1124