PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 363 / WR² 607 LB. FT²/STAGE	PUMP SHAFT DIAM. 4-1/2 INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 93"

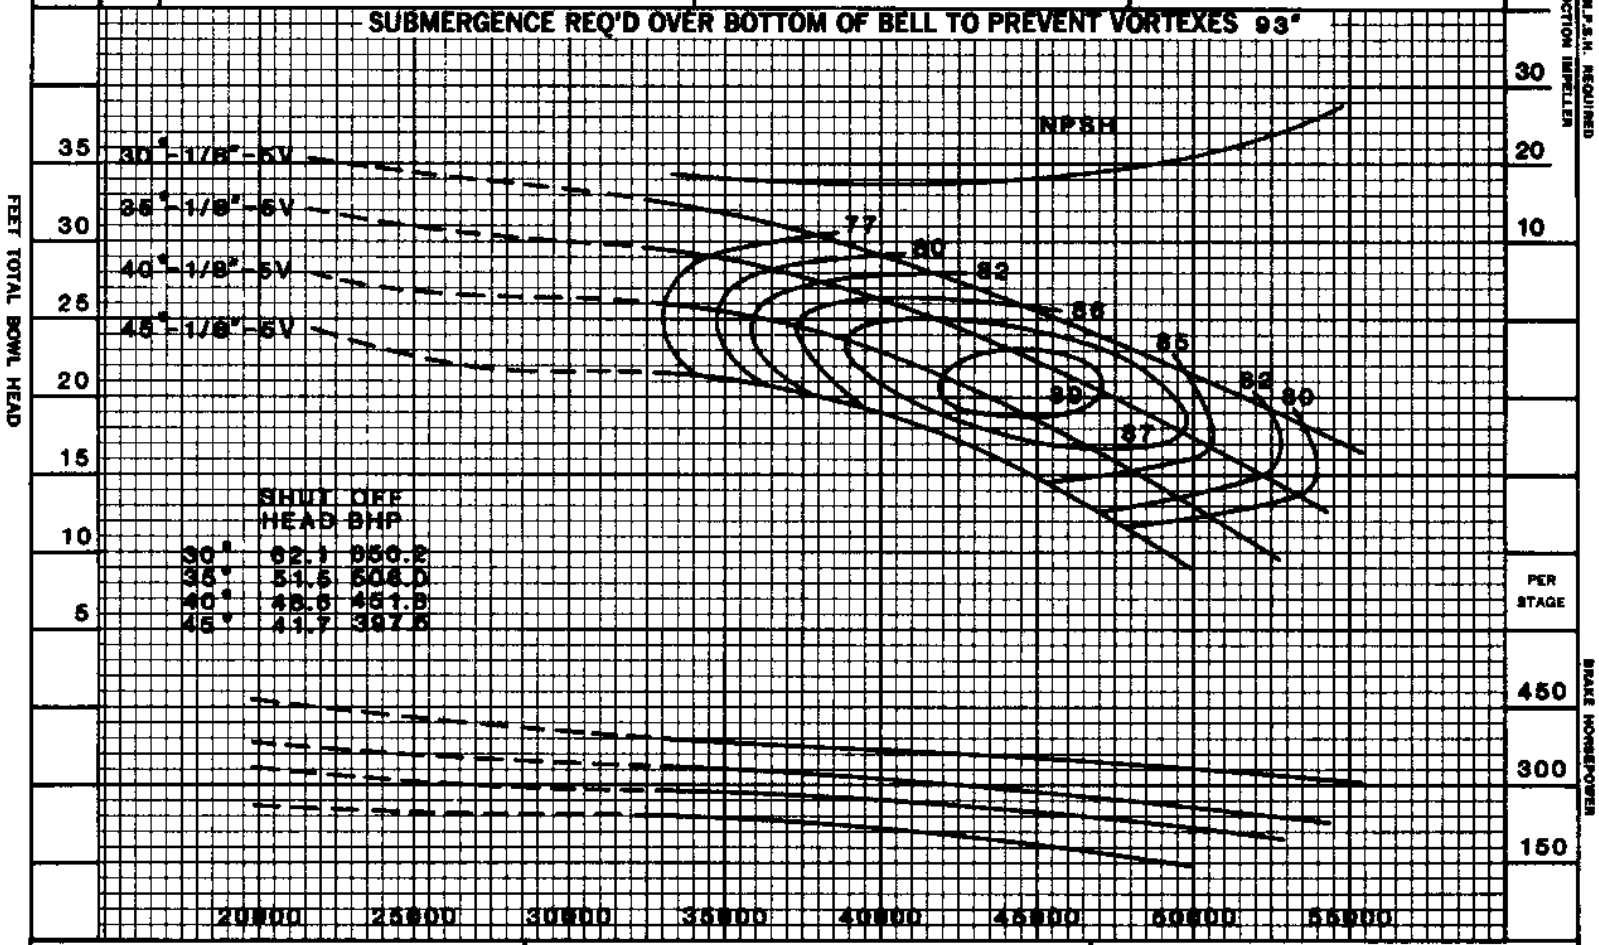

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 11-18-86

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

38 YMS
IMPELLER – BRONZE
MIXED-FLOW PUMP
CLASS 'C' FINISH

440 RPM
BOWL – CAST IRON
CURVE SHEET NO. EC-2816