PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 7128	THRUST CONSTANT 194	PUMP SHAFT DIAM. $3\frac{7}{16}$
			IMPELLER PATTERN NO. 6777	WR² 222 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 74 INCHES

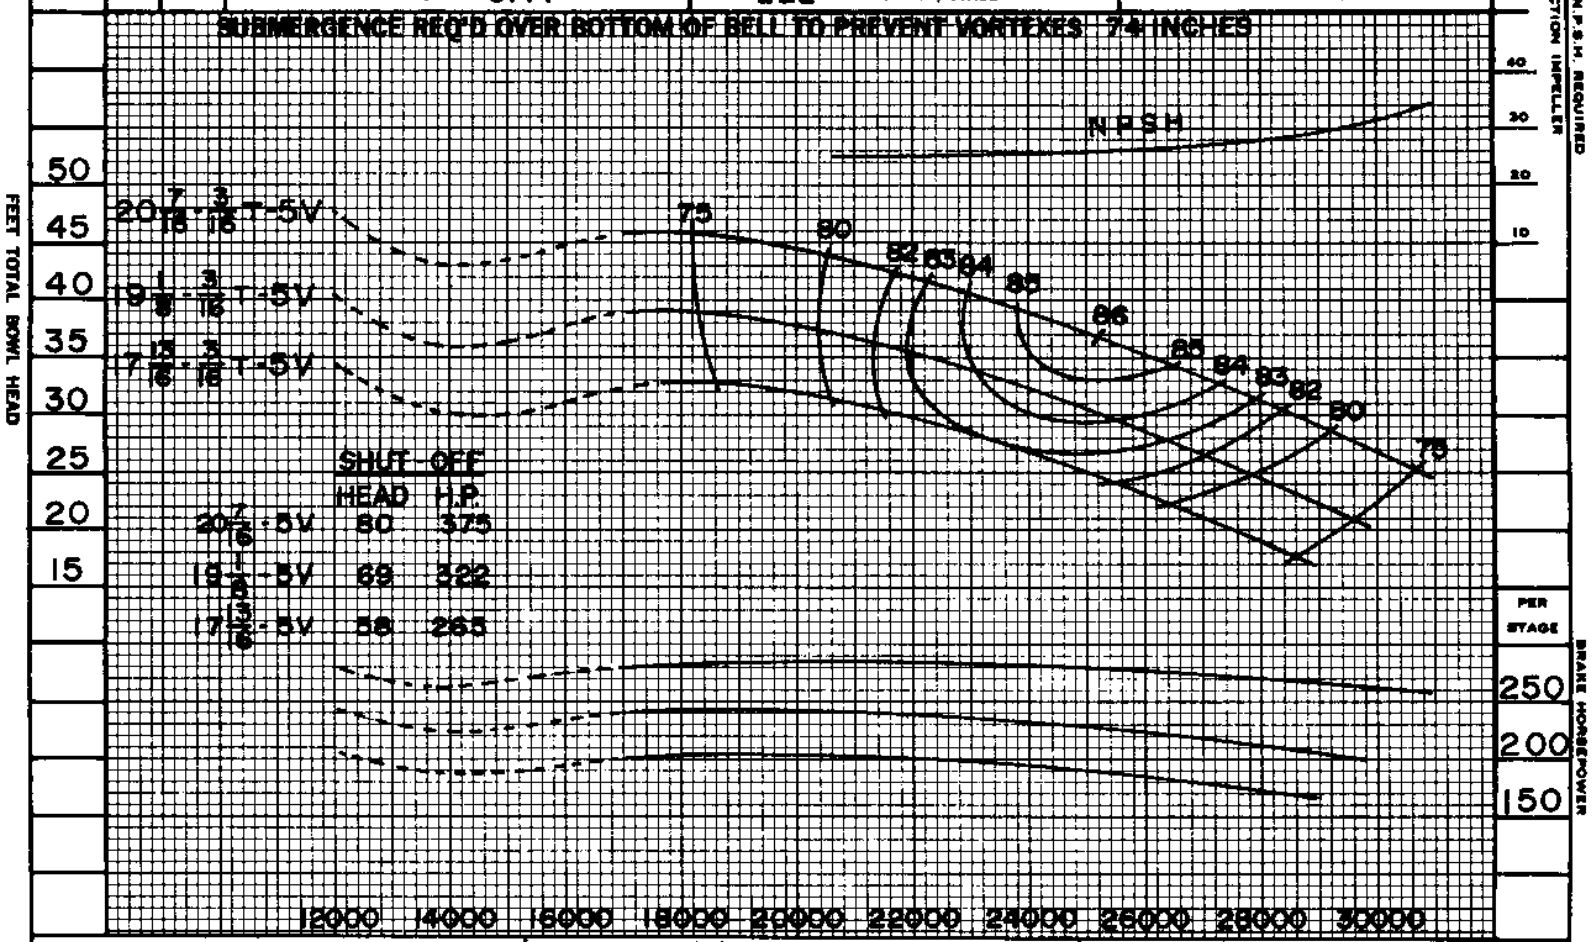

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 9-19-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

30MS MIXED-FLOW PUMP
IMPELLER — BRONZE
CLASS 'C' FIN.

590 RPM
BOWL — CAST IRON

CURVE SHEET NO. EC-0852

JP-1017