

CURVE NO.
12-152
4-16-84


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP.—C.I.	-2
2	0	IMP.—NI-R	-2
3		BOWL—BRZ.	-1
4		BOWL—NI-R.	-1½

18 GM

1180 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE | |
STAGE STAGES

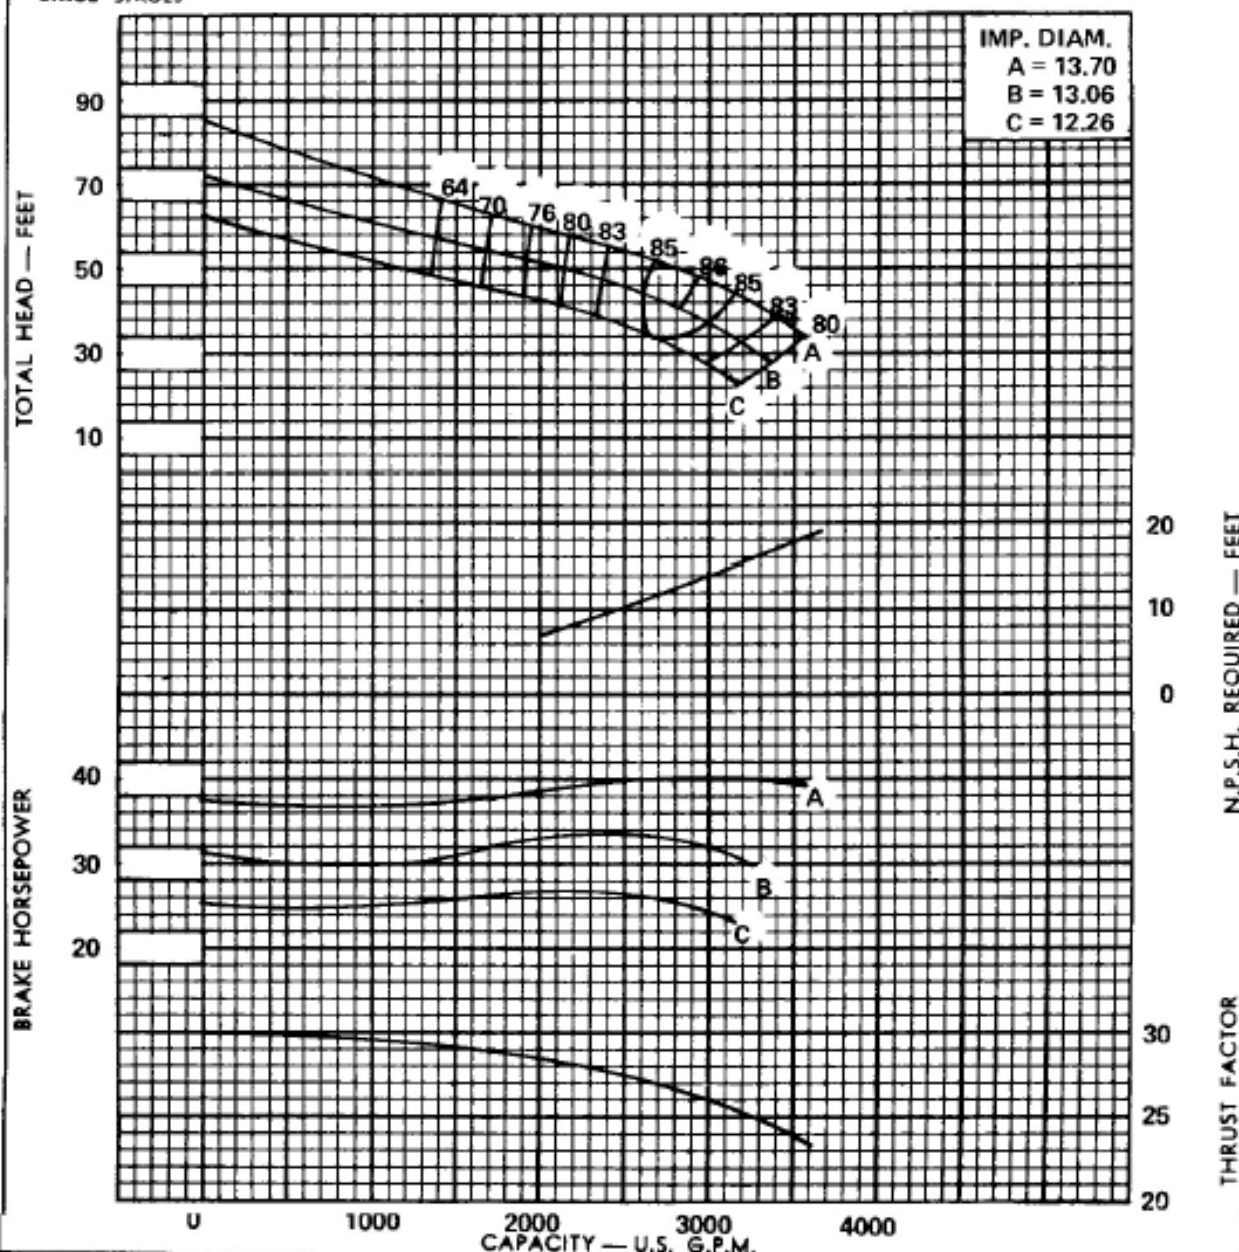

EYE AREA — SQ. IN. = 59	IMPELLER WT.—LBS. = 75
WR ² PER IMPELLER = 10.2 LB.-FT. ²	ONE STAGE WT.—LBS. = 500
MAX. SPHERE SIZE = 1.62 in.	ADD'L STAGE WT.—LBS. = 350
MAX. NO. STD. STAGES = 8	IMPELLER NUMBER = 9G15
MAX. OPERATING P.S.I. = 300	DISCH. SIZES = 14" & 12"
STD. LATERAL = 0.38 in.	SUCTION SIZES = 17½" BELL
STD. SHAFT DIA. = 2.187 in.	MAX. LATERAL = — in.
MAX. SHAFT DIA. = — in.	BOWL CONN. FLANGED COLLET
MIN. SUBMERGENCE = 30 in.	ADD 16½" — PER ADDITIONAL STAGE.

