

CURVE data


No. Stages	Eff. Change	MATERIAL	Eff. Change
1		IMP. - C.I.	-2
2		IMP. - NI-RI	-1
3		BOWL - BRZ.	-1
4		BOWL - NI-R.	-1

11DWMH**1770**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

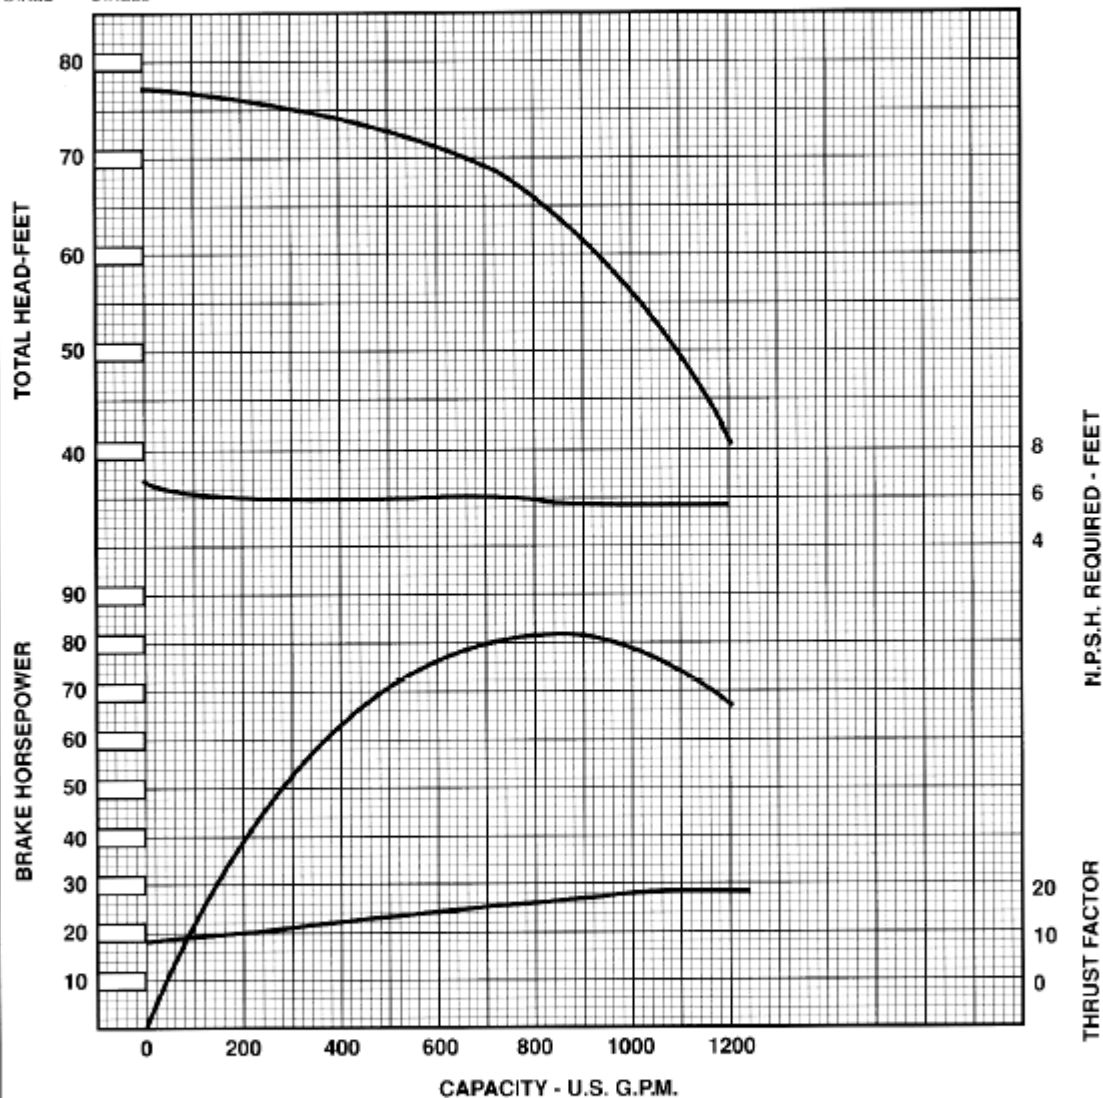PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 14.7	IMPELLER WT. - LBS.	= 13.7
WT. PER IMPELLER LB.-FT. ²	= 0.75	ONE STAGE WT. - LBS.	= 232
MAX. SPHERE SIZE	= -----	ADDL. STAGE WT. - LBS.	= 110
MAX. NO. STD. STAGES	= 20	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 600	DISCH. - IN.	= 8, 10
STD. LATERAL - IN.	= 1.50	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.687	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. - FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	=	ADD - - - -" PER ADDITIONAL STAGE.	

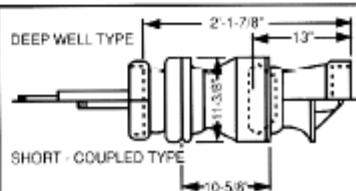

Curves reflect typical performance, refer to factory for certification.