

CURVE NO.
18-136
8-1-78


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP.—C.I.	-1
2	-1	IMP.—NI-R	-2
3	0	BOWL—BRZ.	-1
4		BOWL—NI-R.	-1

12 THC

1760 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

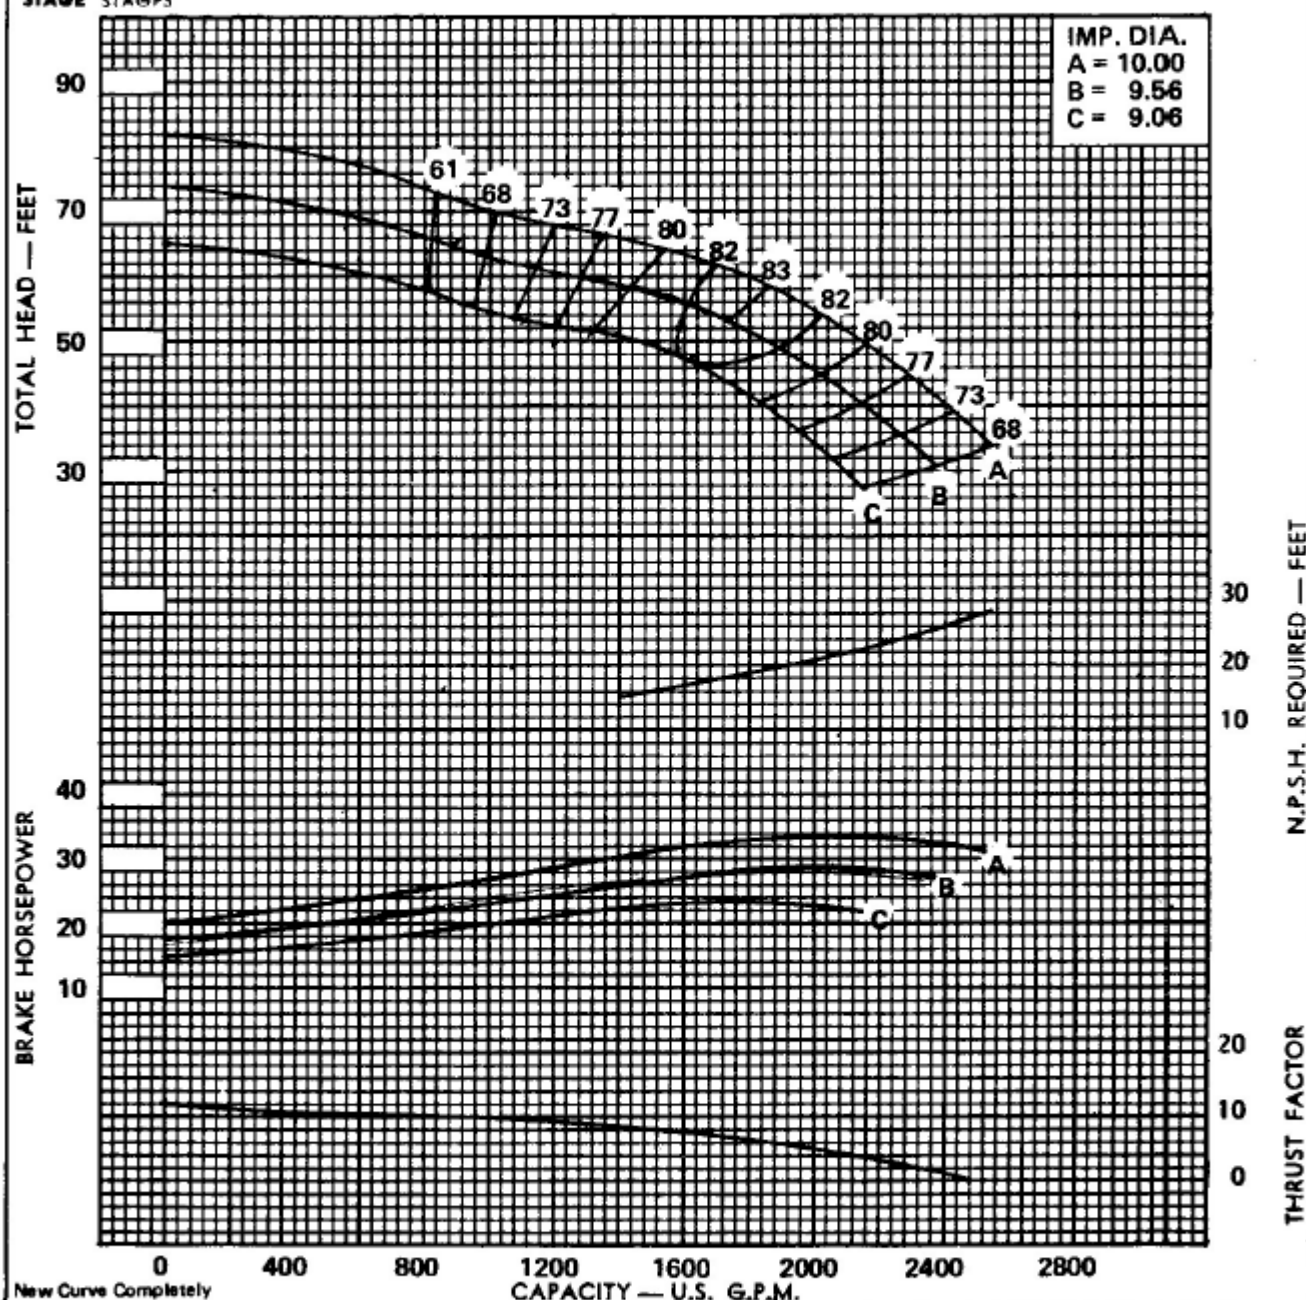

New Curve Completely

EYE AREA — SQ. IN. = 29.63	IMPELLER WT.-LBS. = 19.6
WR ² PER IMPELLER = 1.28 LB.-FT. ²	ONE STAGE WT.-LBS. = 328
MAX. SPHERE SIZE = 1.06 in.	ADD'L STAGE WT.-LBS. = 123
MAX. NO. STD. STAGES = 11	IMPELLER NUMBER = 6T17A
MAX. OPERATING P.S.I. = 410	DISCH. SIZES = 8 & 10
STD. LATERAL = 0.50 in.	SUCTION SIZES = 10
STD. SHAFT DIA. = 1.687 in.	MAX. LATERAL = 1.00 in.
MAX. SHAFT DIA. = 1.937 in.	BOWL CONN. THREADED—COLLET
MIN. SUBMERGENCE = 46 in.	ADD 10 " PER ADDITIONAL STAGE.

