


CURVE NO.
18-146
9-1-78

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP.—C.I.	-1
2	0	IMP.—NI-R	-2
3		BOWL—BRZ.	-1
4		BOWL—NI-R.	-1

14 TLC

1770 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

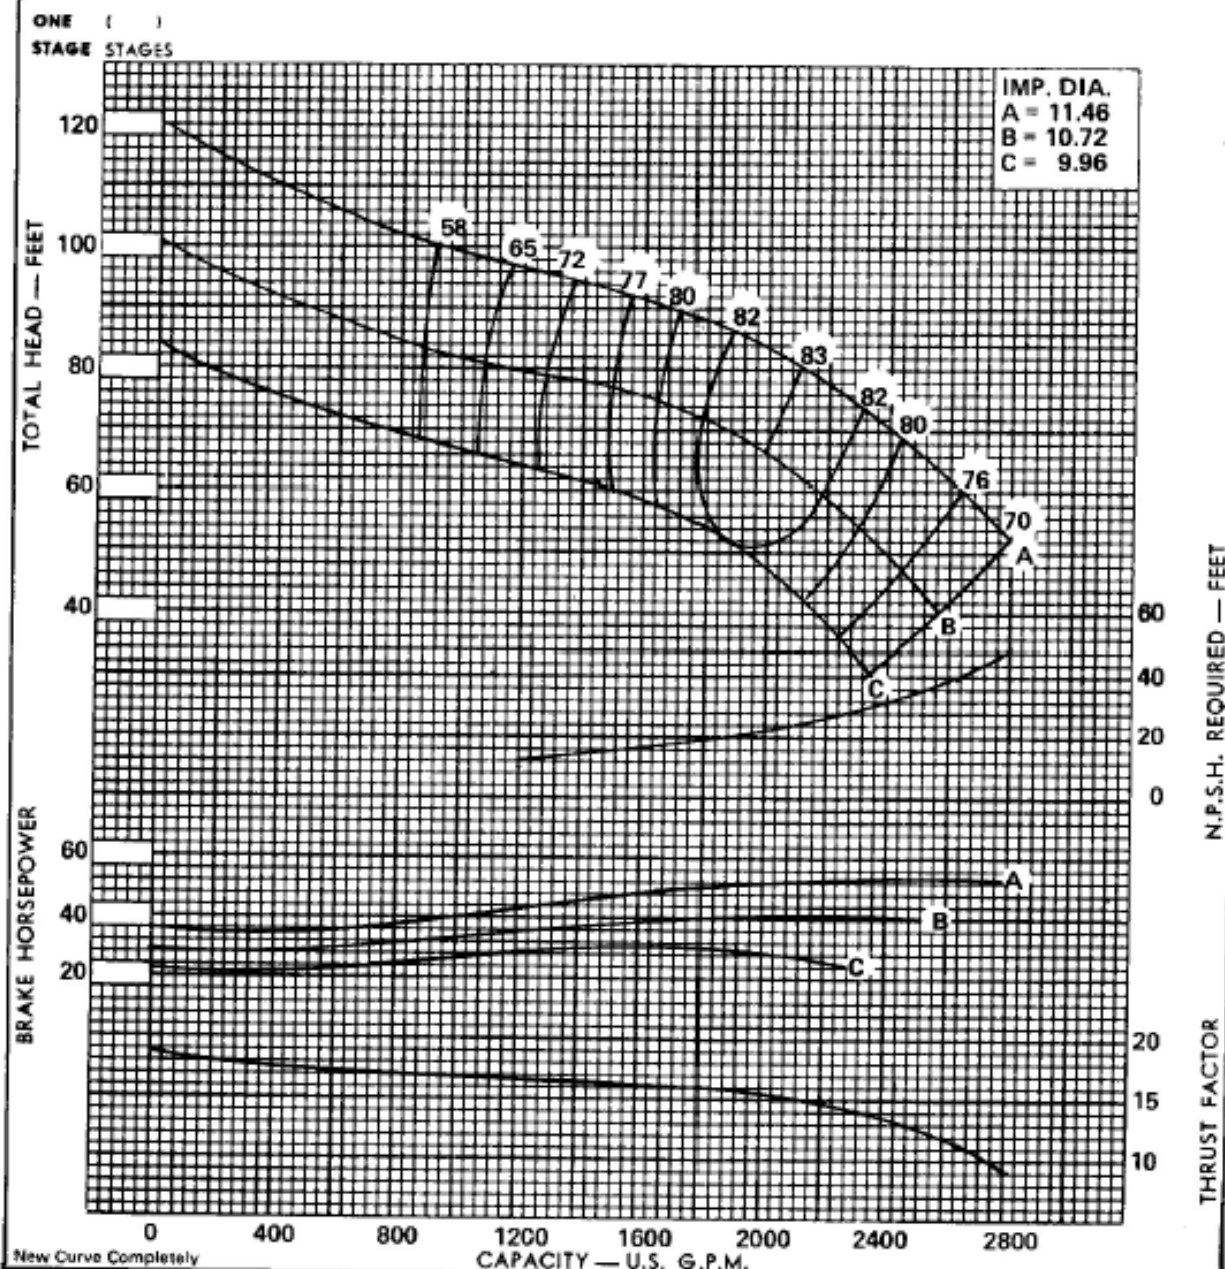

New Curve Completely

EYE AREA — SQ. IN.	34.26	IMPELLER WT. — LBS.	32.1
W _R ² PER IMPELLER	2.72 LB.-FT. ²	ONE STAGE WT. — LBS.	435
MAX. SPHERE SIZE	1.25 in.	ADD'L STAGE WT. — LBS.	164
MAX. NO. STD. STAGES	7	IMPELLER NUMBER	7T13
MAX. OPERATING P.S.I.	380	DISCH. SIZES	10, 12
STD. LATERAL	0.78 in.	SUCTION SIZES	10
STD. SHAFT DIA.	1.937 in.	MAX. LATERAL	1.26 in.
MAX. SHAFT DIA.	2.187 in.	BOWL CONN.	FLANGED—COLLETS
MIN. SUBMERGENCE	36 in.	ADD 13	" PER ADDITIONAL STAGE.

