


CURVE data

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3		BOWL - BRZ.	-1
4		BOWL - NI-R.	-1


16HOH**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE STAGE ()
STAGES STAGES

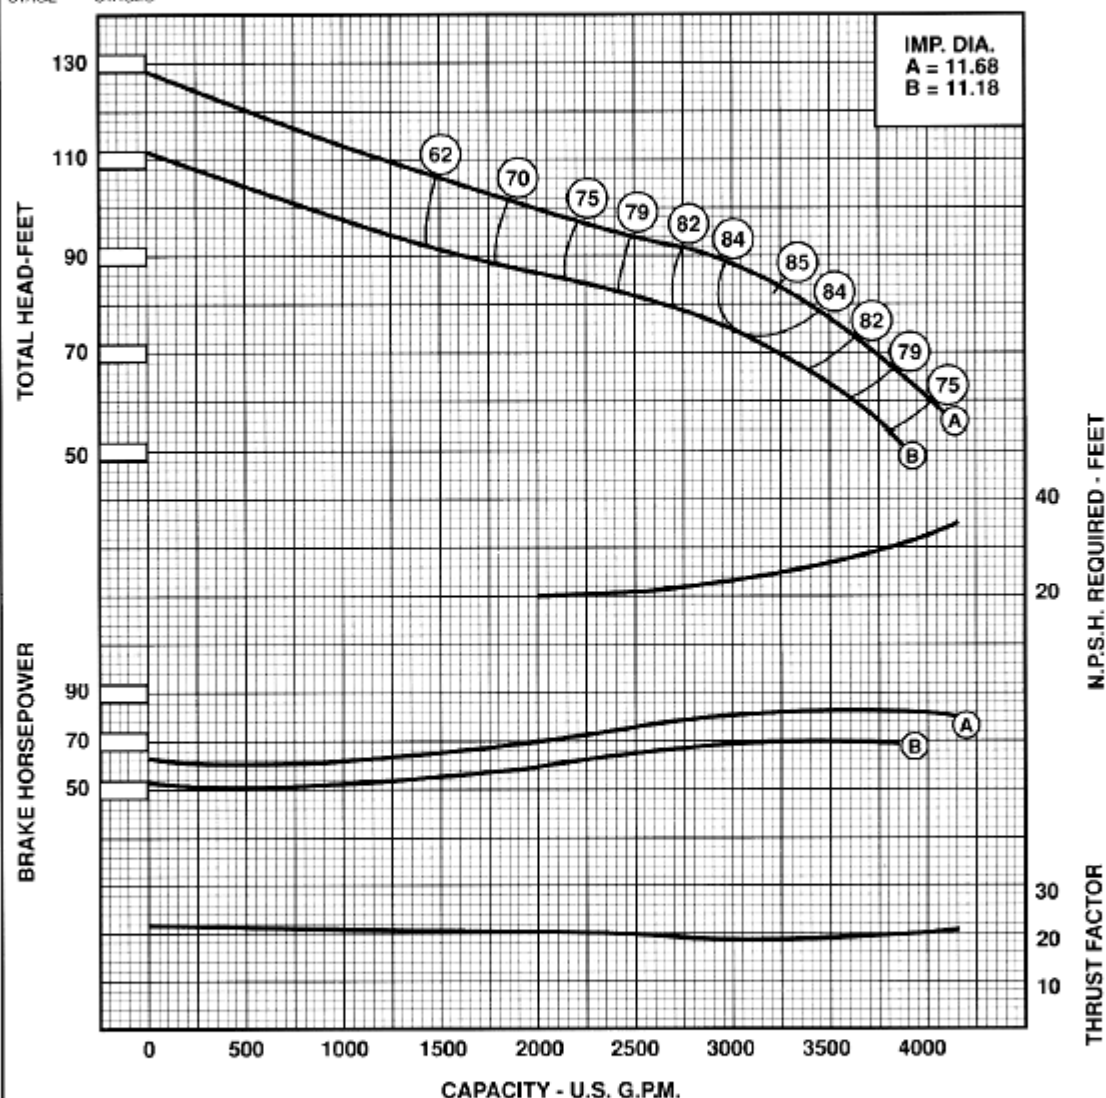PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 47.3	IMPELLER WT. - LBS.	= 40
WR* PER IMPELLER LB.-FT. ²	= 4.7	ONE STAGE WT. - LBS.	= 560
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 310
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 10.12
STD. LATERAL - IN.	= 0.76	SUCTION - IN.	= BELL
STD. SHAFT DIA. - IN.	= 2.187	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 38	ADD 15-1/4" PER ADDITIONAL STAGE.	

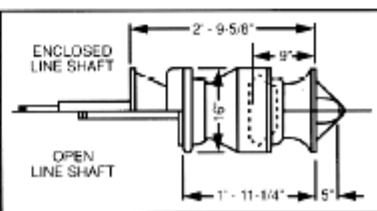

LB77316HOH2110