

CURVE NO.
18-187
4-16-84


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP.—C.I.	-2
2	0	IMP.—NI-RI	-2
3		BOWL—BRZ	-1
4		BOWL—NI-R	-1½

18 GM

1770 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

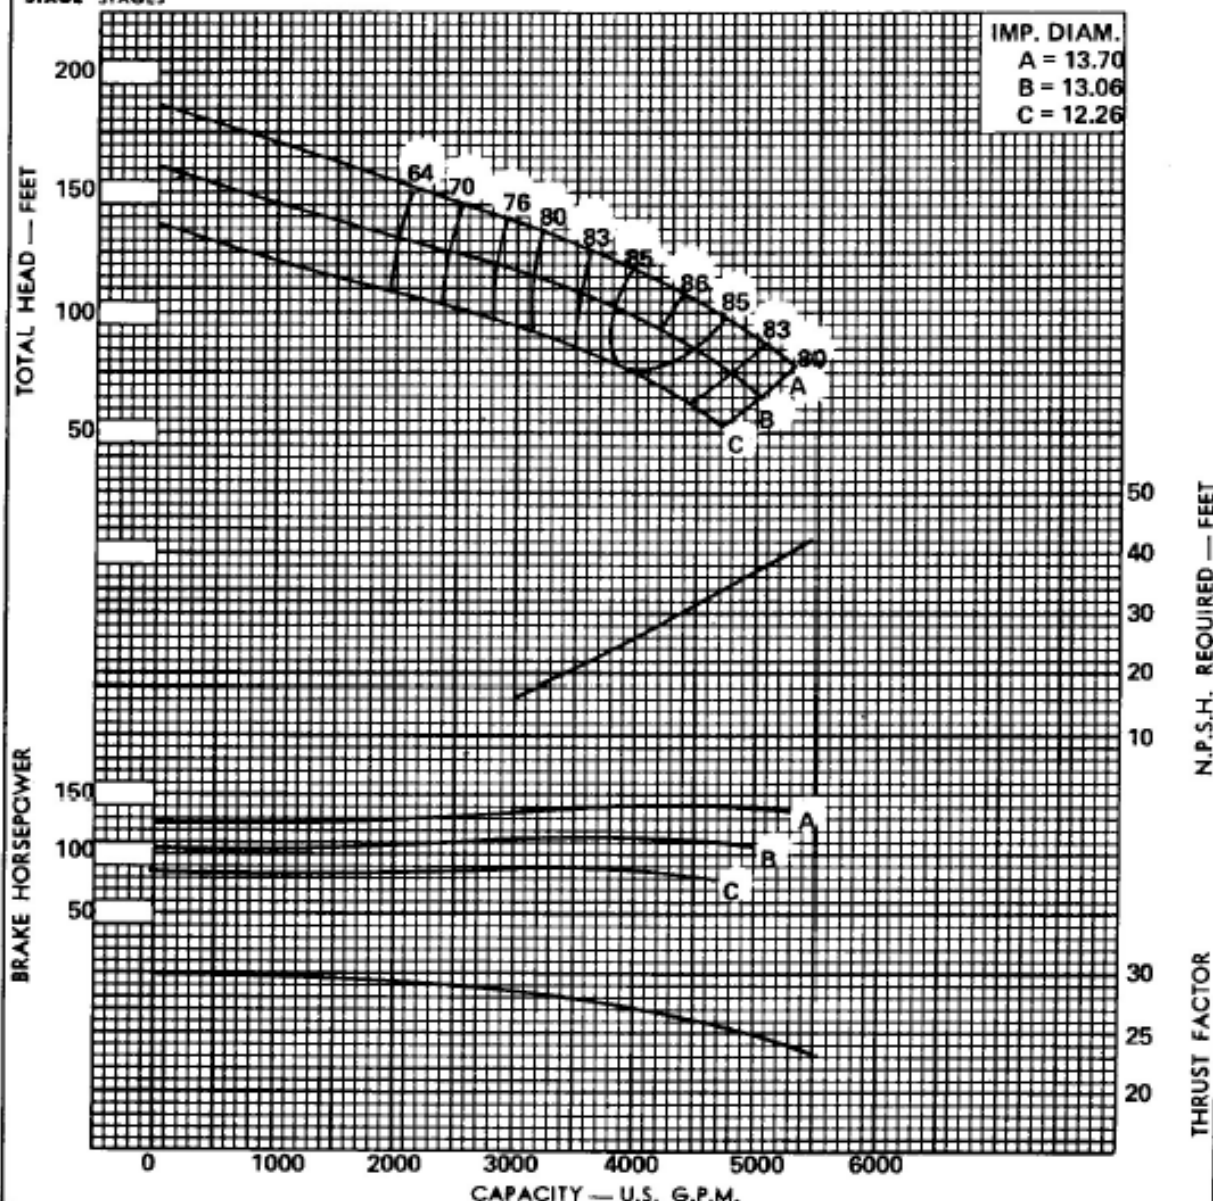

EYE AREA—SQ. IN.	= 58	IMPELLER WT.-LBS.	= 75
WR ² PER IMPELLER	= 10.2 LB.-FT ²	ONE STAGE WT.-LBS.	= 500
MAX. SPHERE SIZE	= 1.62 in.	ADD'L STAGE WT.-LBS.	= 350
MAX. NO. STD. STAGES	= 4	IMPELLER NUMBER	= 9G15
MAX. OPERATING P.S.I.	= 300	DISCH. SIZES	= 14" & 12"
STD. LATERAL	= 0.38 in.	SUCTION SIZES	= 17½" BELL
STD. SHAFT DIA.	= 2.187 in.	MAX. LATERAL	= --- in.
MAX. SHAFT DIA.	= --- in.	BOWL CONN.	FLANGED COLLET
MIN. SUBMERGENCE	= 44 in.	ADD 16½" " PER ADDITIONAL STAGE.	

