

CURVE NO.
12-193
3-15-84


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	0	IMP.—C.I.	
2	0	IMP.—NI-RI	
3		BOWL—BRZ.	
4		BOWL—NI-R.	

22 GM

1180 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE STAGES

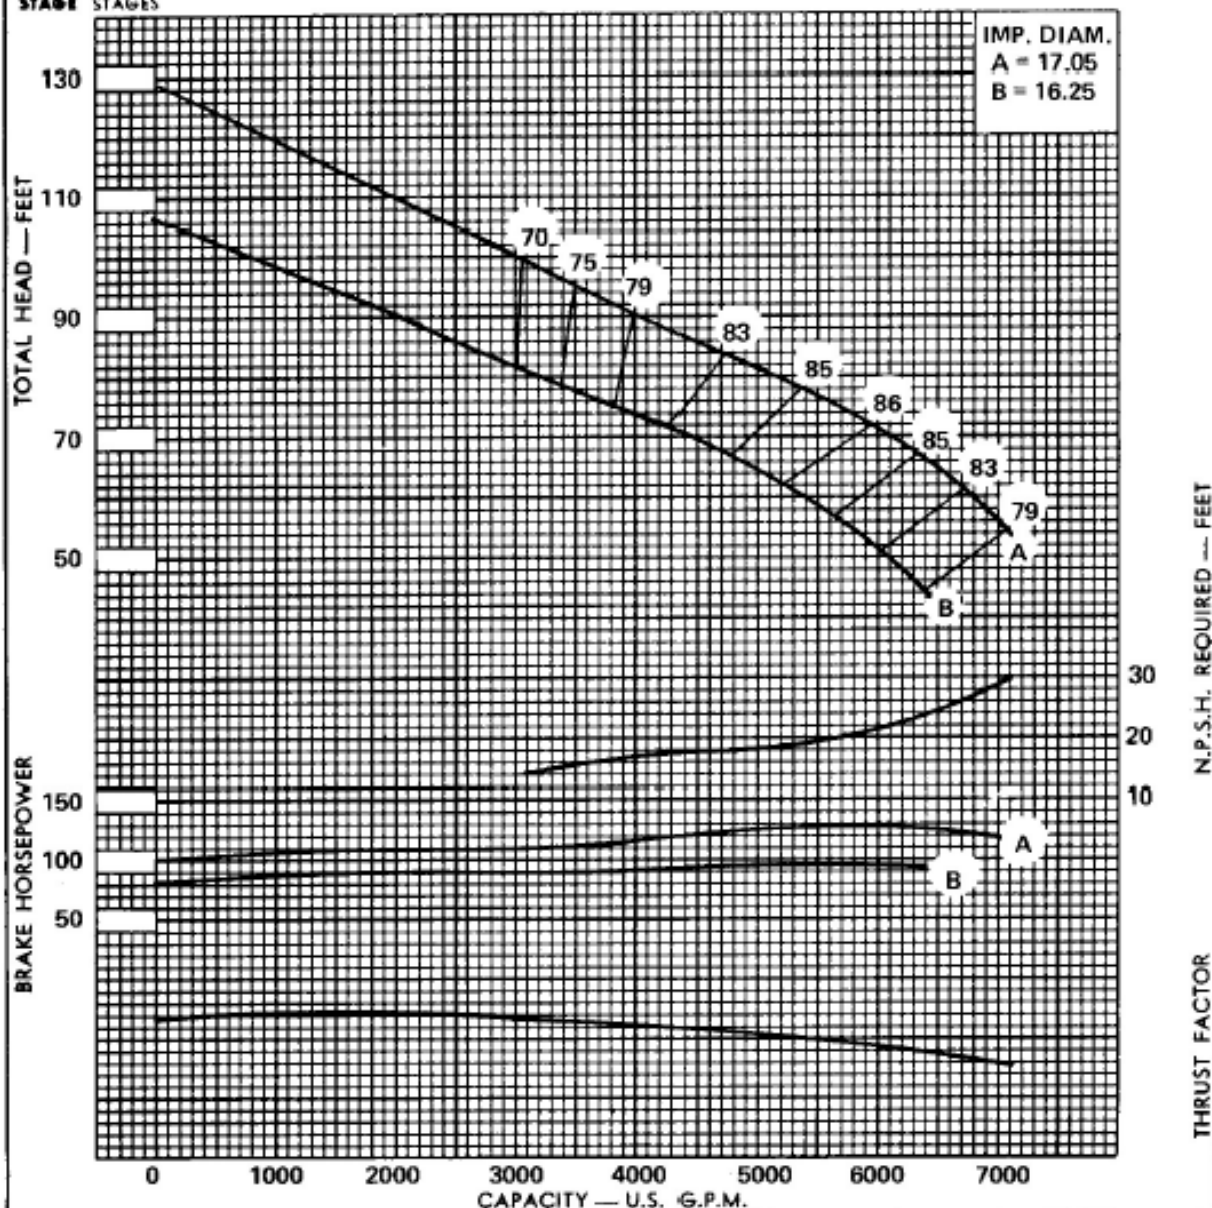

EYE AREA — SQ. IN. = 91.44	IMPELLER WT.—LBS. = 95
WR ² PER IMPELLER = 22 LB.-FT. ²	ONE STAGE WT.—LBS. = 1200
MAX. SPHERE SIZE = 1.42 in.	ADD'L STAGE WT.—LBS. = 550
MAX. NO. STD. STAGES = 6	IMPELLER NUMBER = 11G15
MAX. OPERATING P.S.I. = 350	DISCH. SIZES = 16"
STD. LATERAL = 0.58 in.	SUCTION SIZES = 22 1/2" BELL
STD. SHAFT DIA. = 2.687 in.	MAX. LATERAL = — in.
MAX. SHAFT DIA. = — in.	BOWL CONN. FLANGED—KEYED
MIN. SUBMERGENCE = 30 in.	ADD 20 1/2" PER ADDITIONAL STAGE.

