


CURVE data

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	0	IMP. - C.I.	-1.0
2	0		
3	-1.0		
4	N/A		


57BRH**440** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

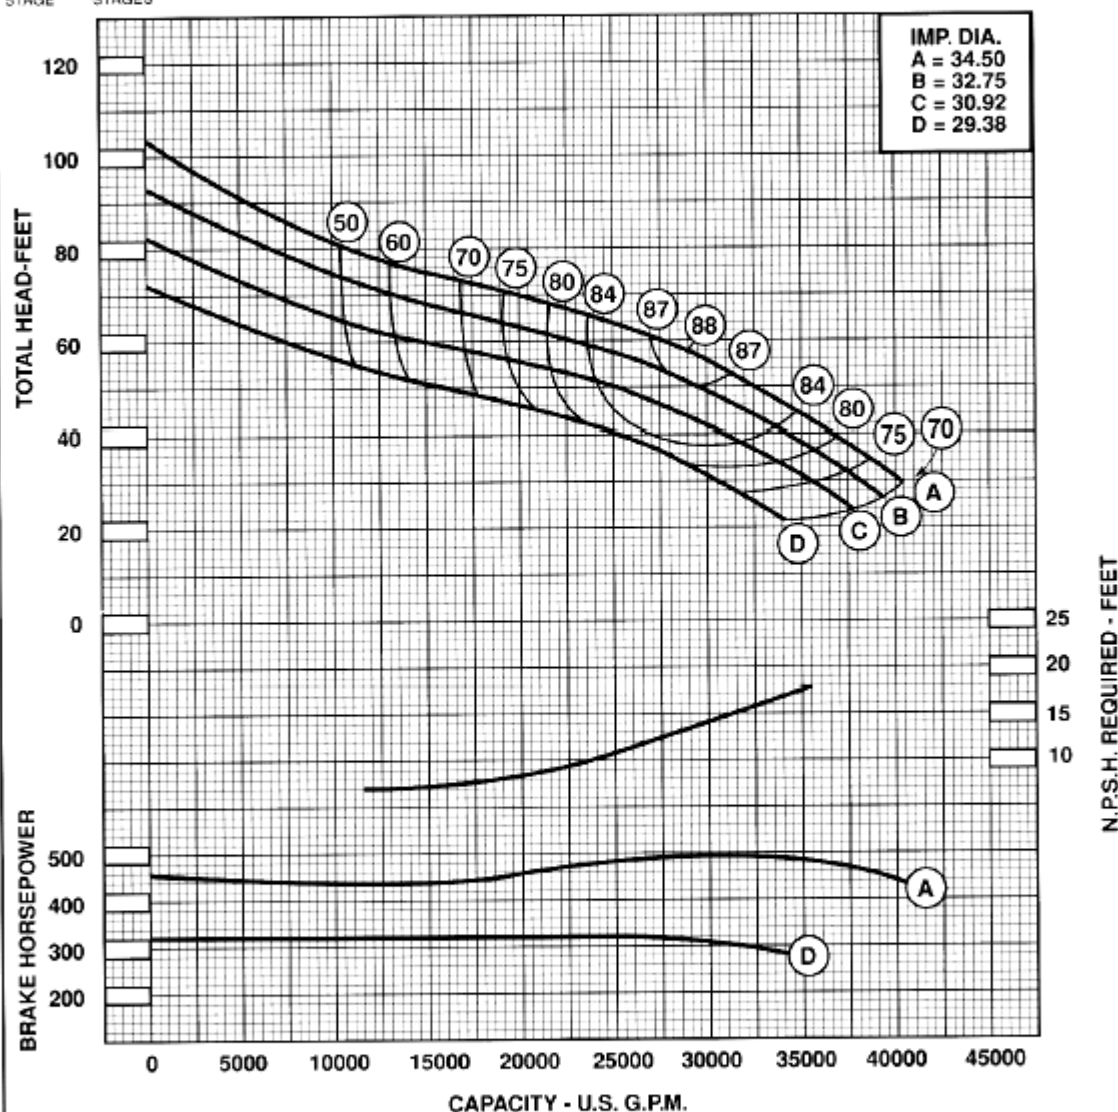PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 571	IMPELLER WT. - LBS.	= 975
WRP PER IMPELLER LB.-FT. ²	= 1590	ONE STAGE WT. - LBS.	= 8000
MAX. SPHERE SIZE	= 5.25 IN.	ADD'L STAGE WT. - LBS.	= 4500
MAX. NO. STD. STAGES	= 3	IMPELLER NUMBER	= T7AWA99
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	= 36
STD. LATERAL - IN.	= .62	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= RTF	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL/IMP. CONN. -	
MIN. SUBMERGENCE - IN.	= 126	ADD 23-1/2" PER ADDITIONAL STAGE.	



Curves reflect typical performance; refer to factory for certification.