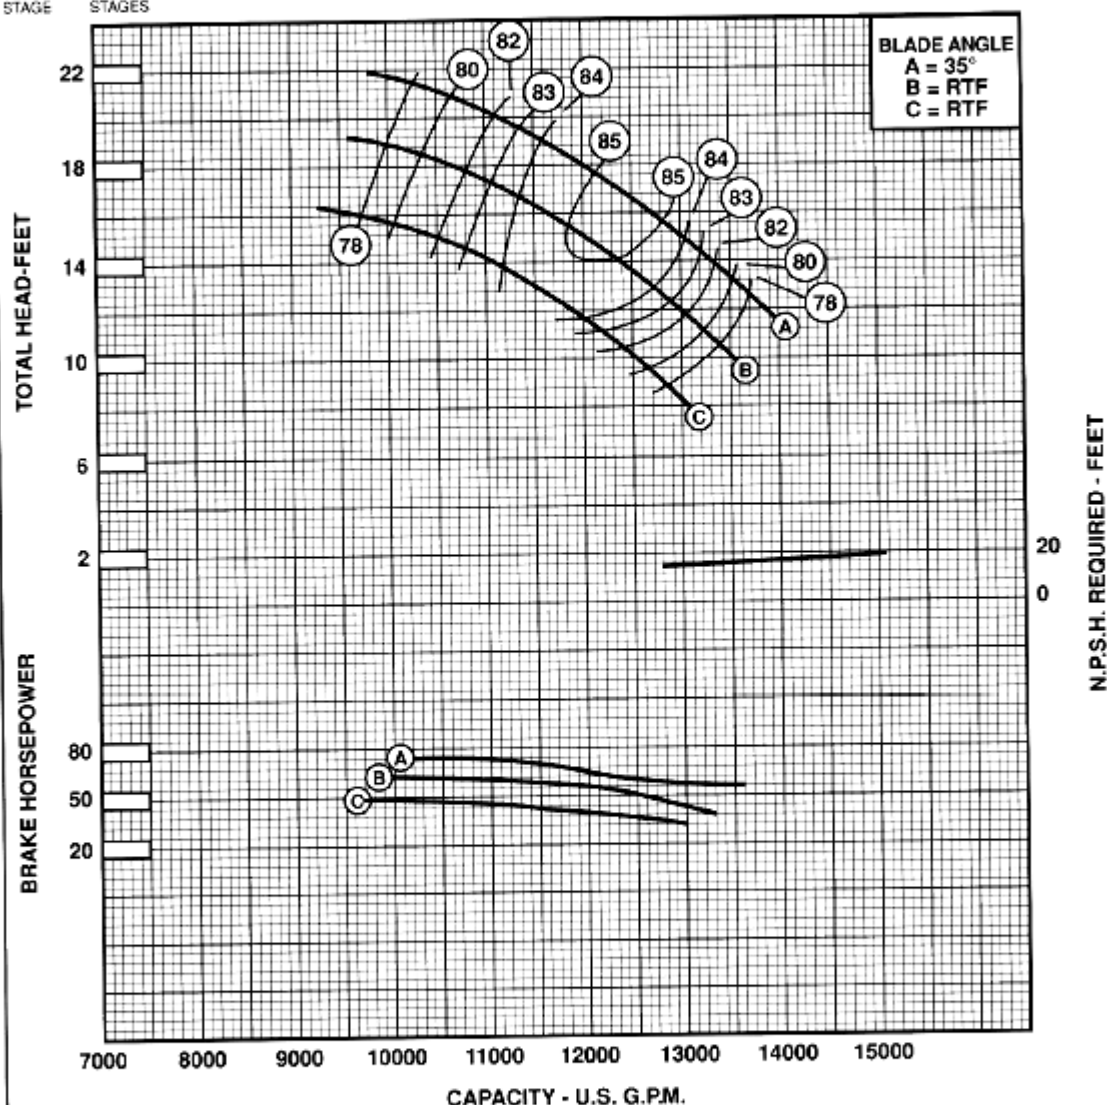


**24MF****590** R.P.M.ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES	2.0 in.
				IMP. PATT. NO.	24I M4A
A	47.3	112.2	133.0	CASE PATT. NO.	-
B	41.6	86.0	133.0	DISCHARGE BOWL	24MF2
C	36.1	70.0	133.0	INTER. BOWL	24MF4

LB059024MF2160