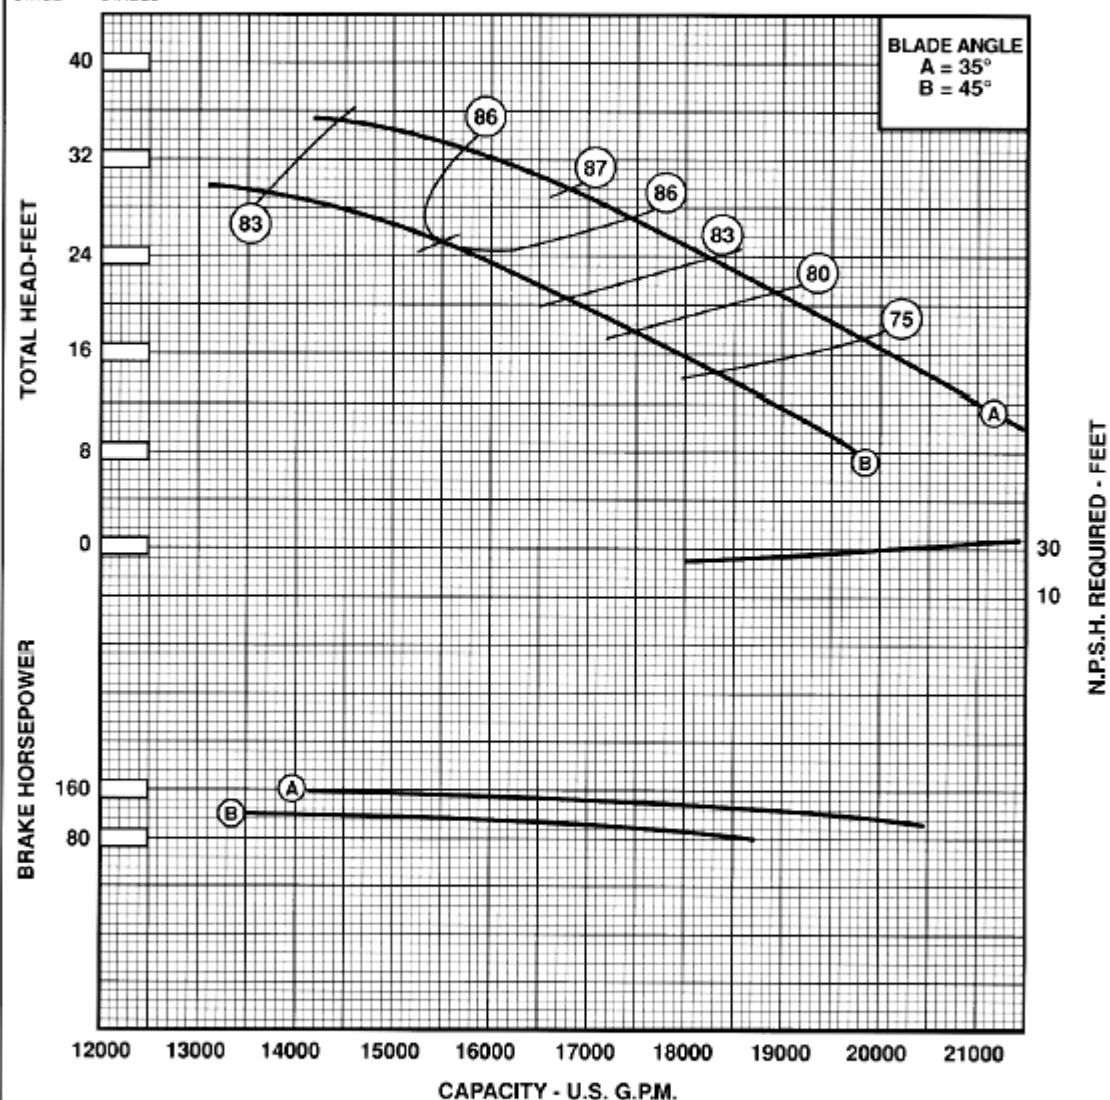


CURVE data**24MFA****700** R.P.M.ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPINDLES	2.0 in.
				IMP. PATT. NO.	24LM6H
A	68.9	240	133	CASE PATT. NO.	-
B	48.5	152	133	DISCHARGE BOWL	24MF2
				INTER. BOWL	24MF4

L807022MFA2190