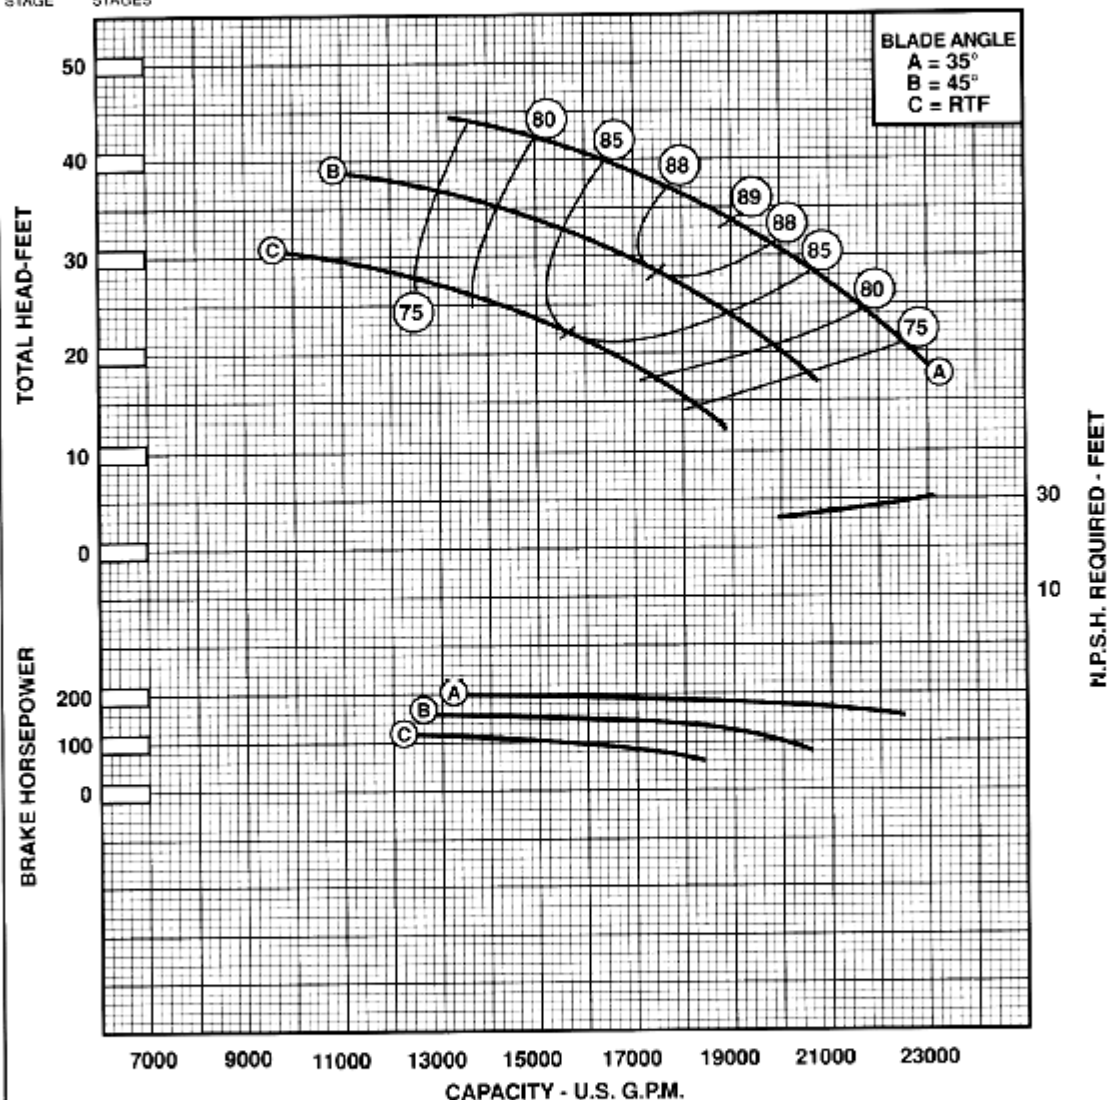


**26MF****700** R.P.M.ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES	2.0 in.
A	89.7	331.0	159.0	IMP. PATT. NO.	26LM4A
B	77.8	234.0	159.0	CASE PATT. NO.	—
C	62.5	183.0	159.0	DISCHARGE BOWL	26MF2
				INTER BOWL	26MF4

L 8070026MF2160