


**20MF****880** R.P.M.ONE
STAGE()
STAGES**PUMP PERFORMANCE**


IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES	1.7 in.
				IMP. PATT. NO.	20LM6B
A	91.5	306.0	107.0	CASE PATT. NO.	-
B	62.4	181.0	107.0	DISCHARGE BOWL	20MF2
				INTER. BOWL	20MF4

L00000201MF2 160

CURVE NO. 6582

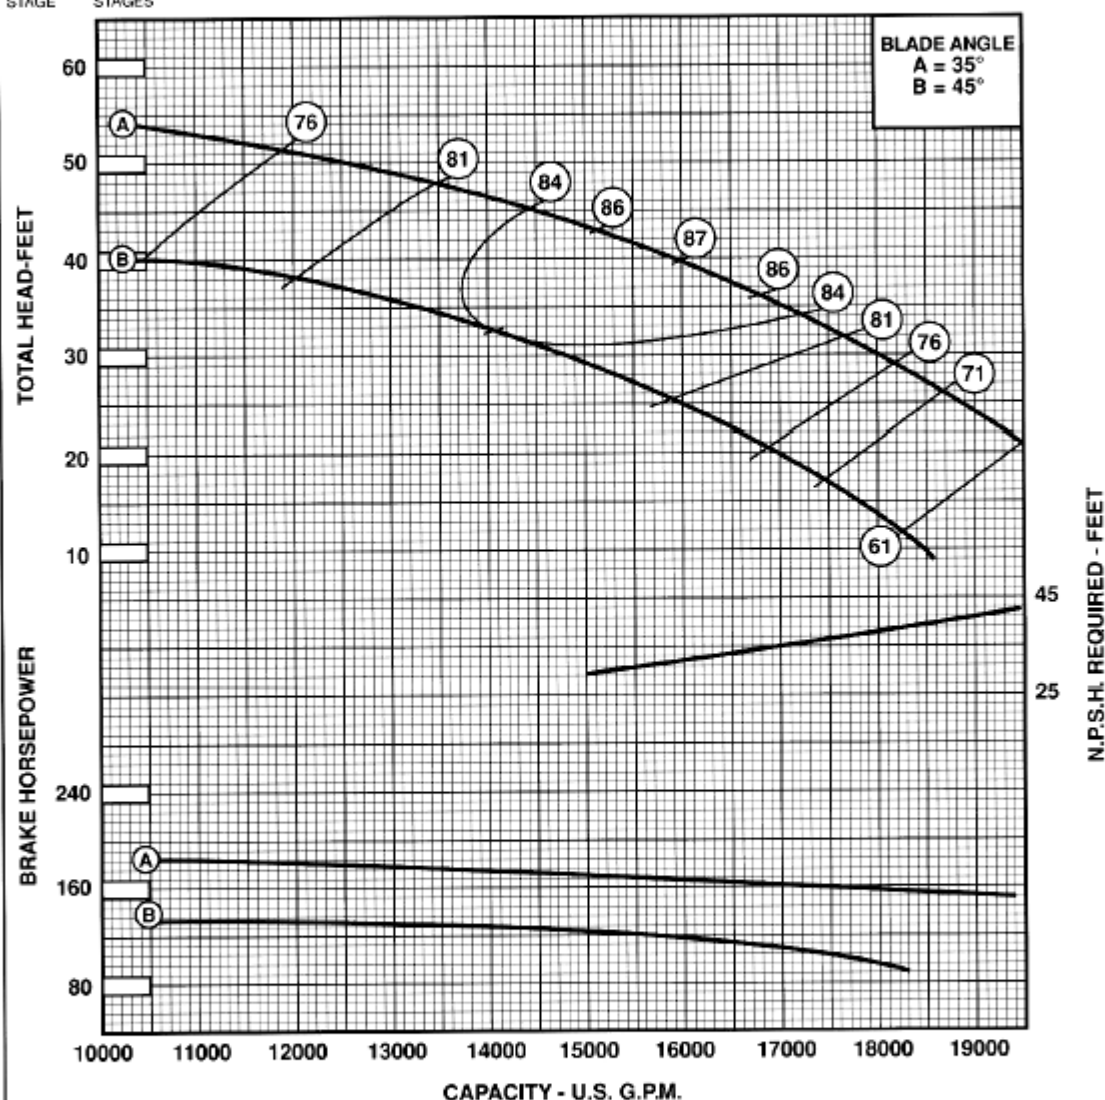

PUMP PERFORMANCE
 1 STAGE #20 MIXED FLOW PUMP
 880 RPM
 C6 IMPELLER

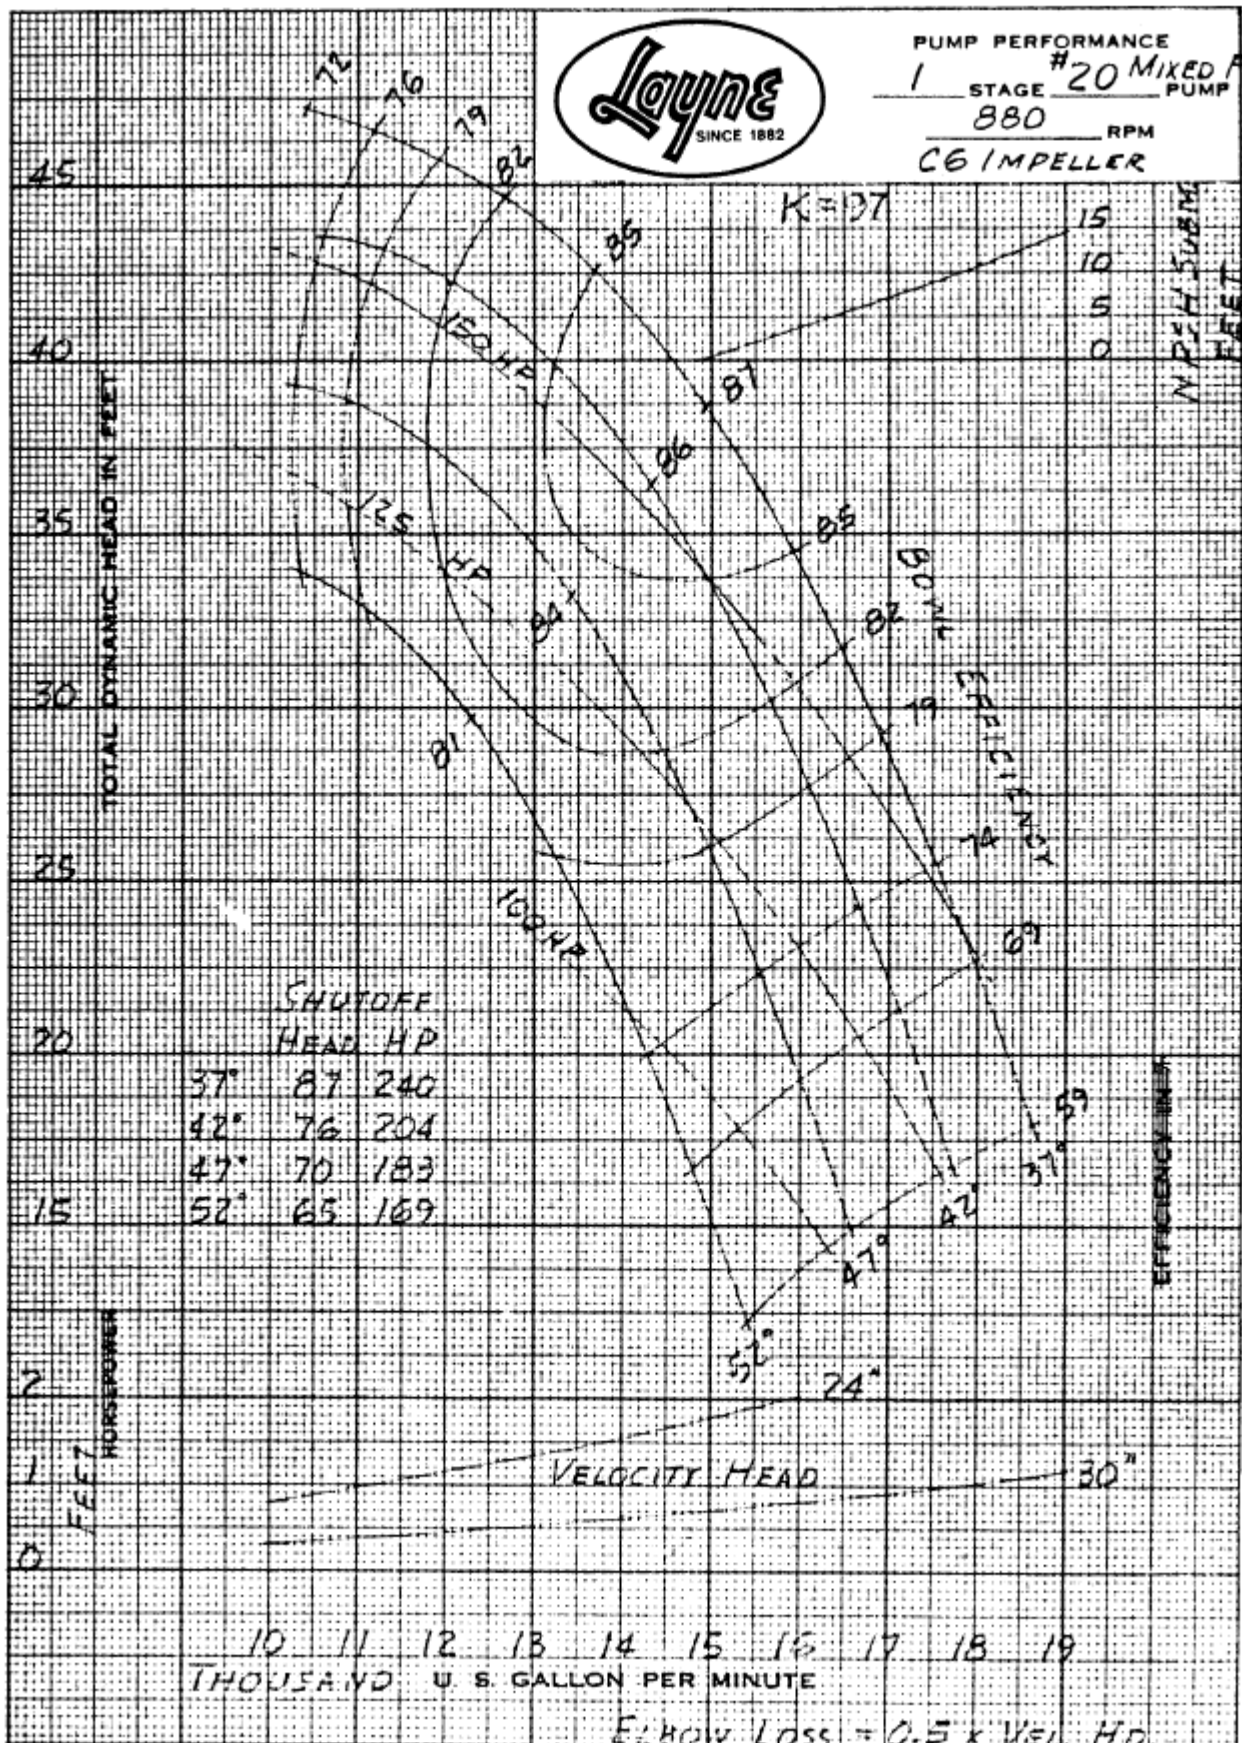

CURVE NO. 6583



PUMP PERFORMANCE

1 #20 MIXED FLOW PUMP

STAGE

880

RPM

A5 IMPELLER

K = 97

TOTAL DYNAMIC HEAD IN FEET

EFFICIENCY

VELOCITY HEAD

SHUT OFF
HEAD HP

37	87	241
43	77	208
49	66	163
55	60	139

FEET
HORSEPOWER7 8 9 10 11 12 13 14 15
THOUSAND U. S. GALLON PER MINUTE

ELBOW LOSS = 0.5 x VEL. HD.

CURVE NO. 6692



PUMP PERFORMANCE
 1 STAGE #20 MIXED FLOW PUMP
 880 RPM
 AA4 IMPELLER
 K=97

