

CURVE data




24PF

880

R.P.M.

ONE
STAGE ()
STAGES

PUMP PERFORMANCE

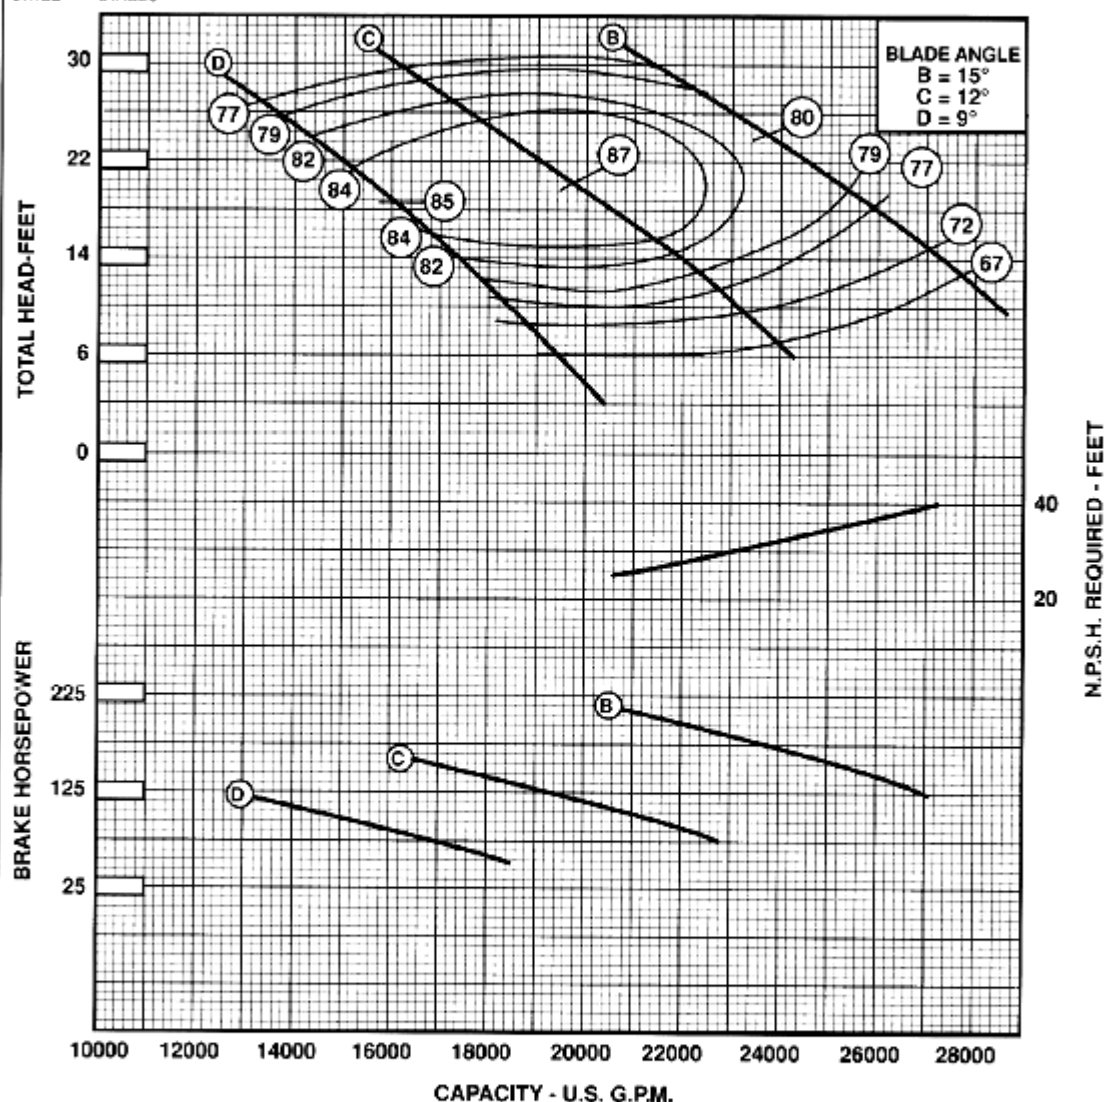

IMPELLER DIAMETER	SHUT-OFF HEAD FT.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES IMP. PATT. NO.	1.9 in. 24P
B	82.2	631.0	202.0	CASE PATT. NO.	24PF2
C	72.5	436.0	202.0	DISCHARGE BOWL	-
D	69.8	340.0	202.0	INTER. BOWL	-

LB03024PF 2100