

H12MC TEMPORARY

ONE STAGE PERFORMANCE
1770 RPM

IMPELLER DIAMETER

A= 9.062
B= 8.500
C=

EFFICIENCY

NO. OF STAGES
5
4
3
2

CHANGE

NO. OF POINTS
0
1
2
3

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




NATIONAL
PUMP

GLENDALE, ARIZONA

SECTION - C
PAGE - 16.2

H12MC
1770 RPM
APR 1982

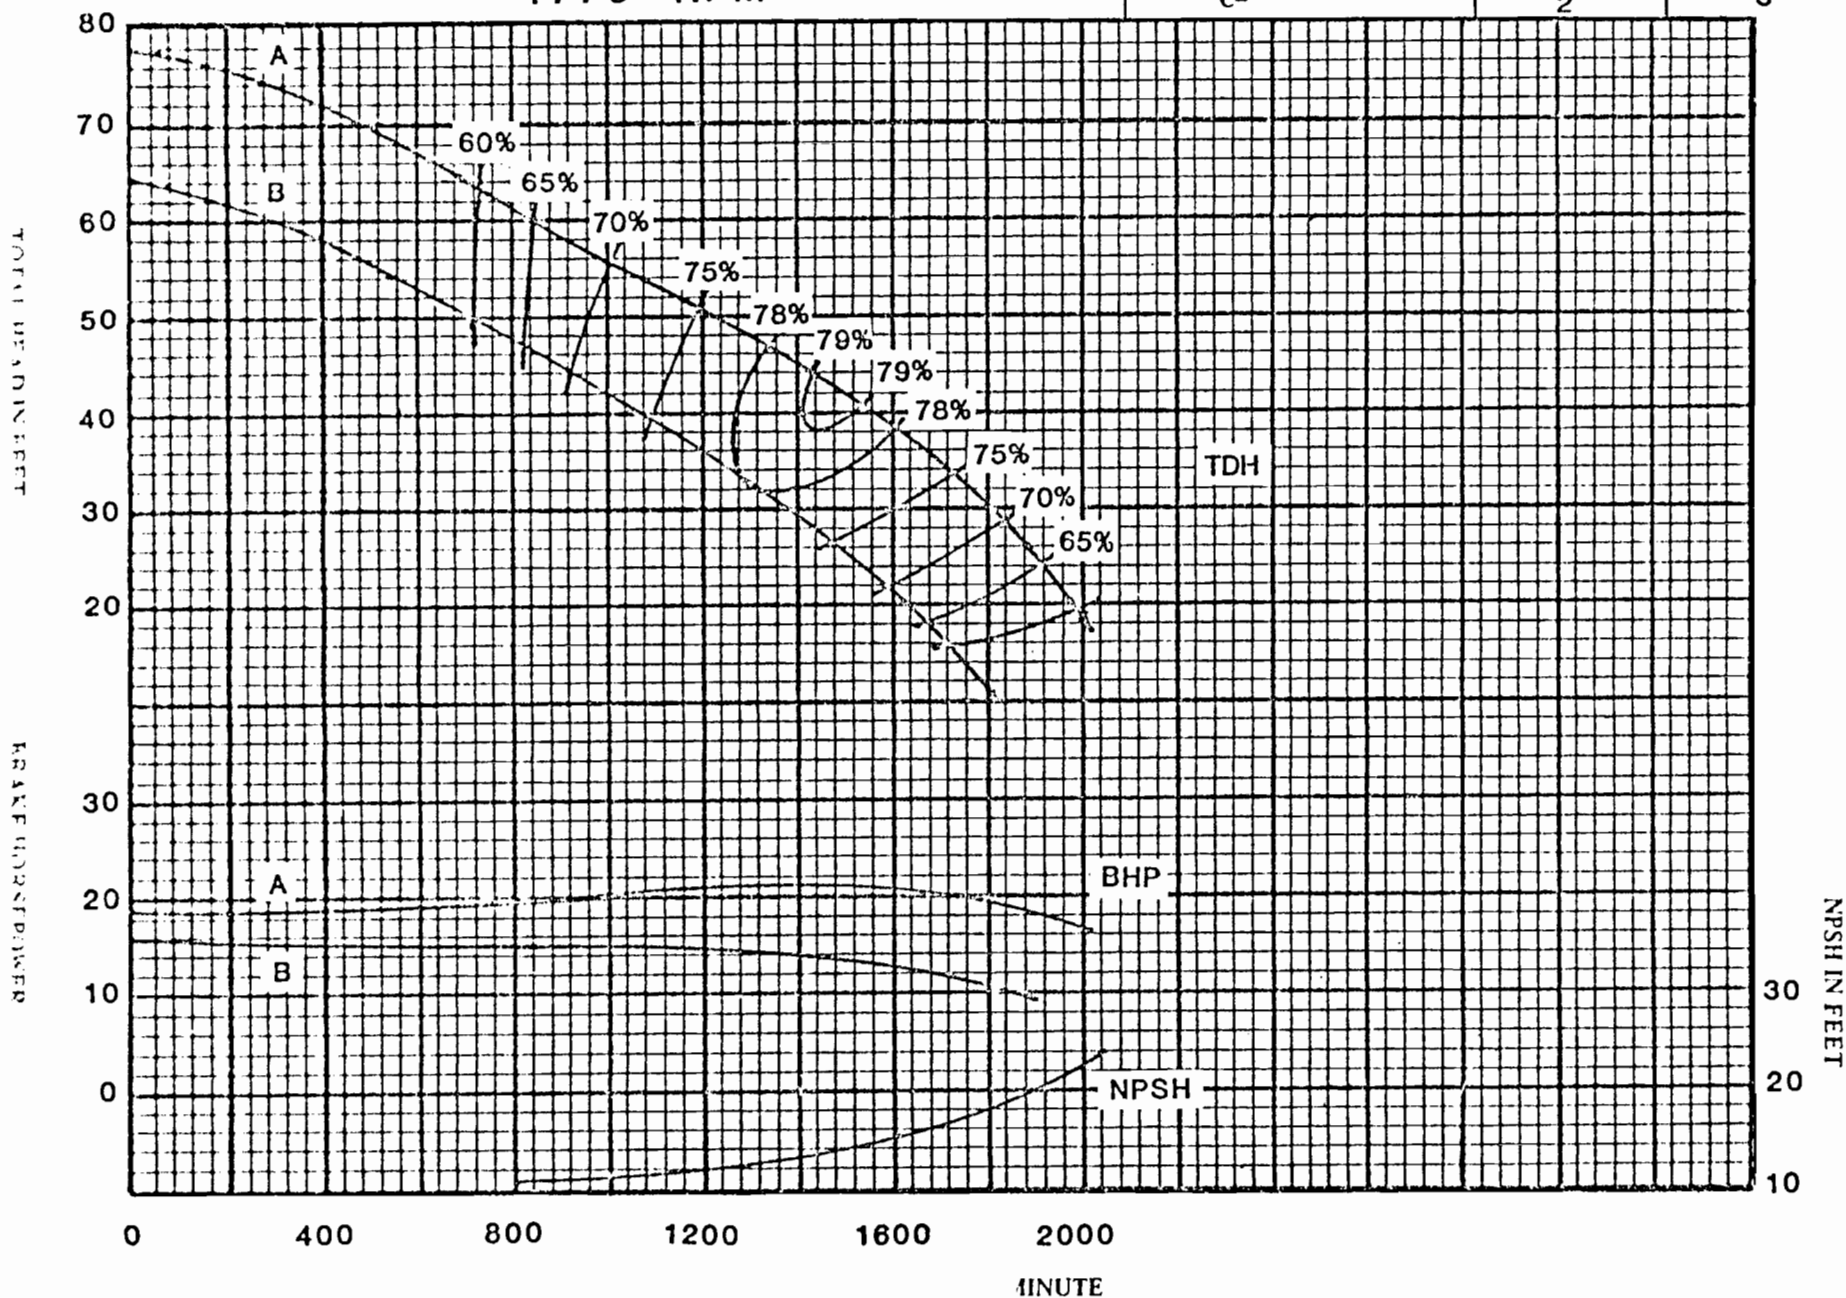

H12MC


LEE NATIONAL
PUMP

GLENDALE, ARIZONA

SINGLE STAGE WEIGHT: **270 LBS**

ADD'L STAGE WEIGHT:

110 lbs.

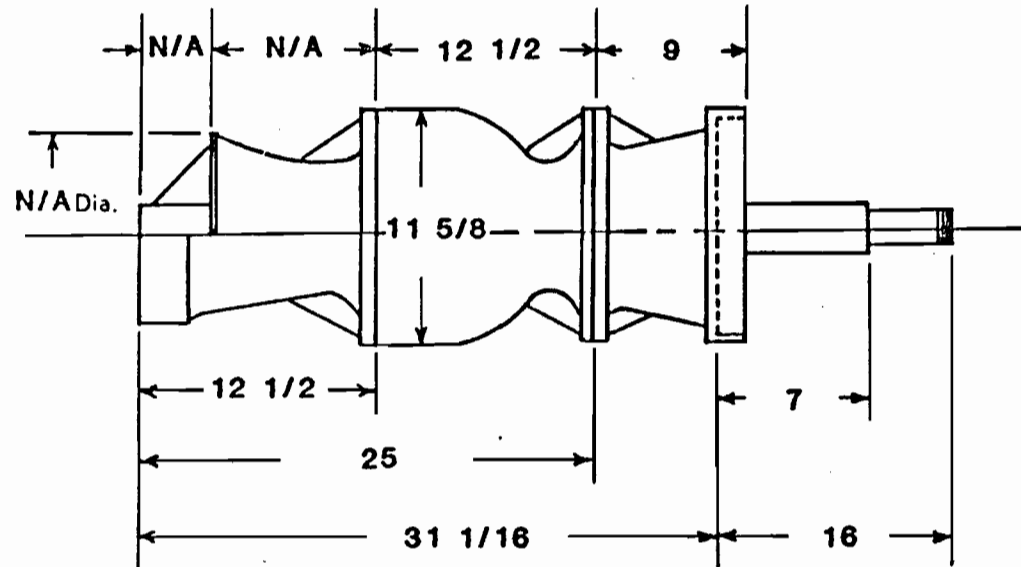

IMPELLER DATA

IMPELLER NO. _____, TYPE ENCLOSED, STANDARD MATERIAL BRONZE, FULL DIAMETER 9.062.
EYE AREA 33.4 sq. in. NO. VANES 5, THRUST CONSTANT 15.4, WEIGHT 23 lbs.

BOWL DATA

BOWL NO. WITH BRZ. BRG. _____, BOWL NO. WITH RUBBER BRG. _____, TYPE BOLTED.
LATERAL 1", SHAFT DIA. 1 11/16", MAX. NO. OF STAGES 17, SUCTION INLET 10" THR'D.
COLUMN PIPE: 8", 10" THREADED