


M6LC

SUBMERSIBLE PUMP PERFORMANCE

3450 RPM

3" NPT THREADS

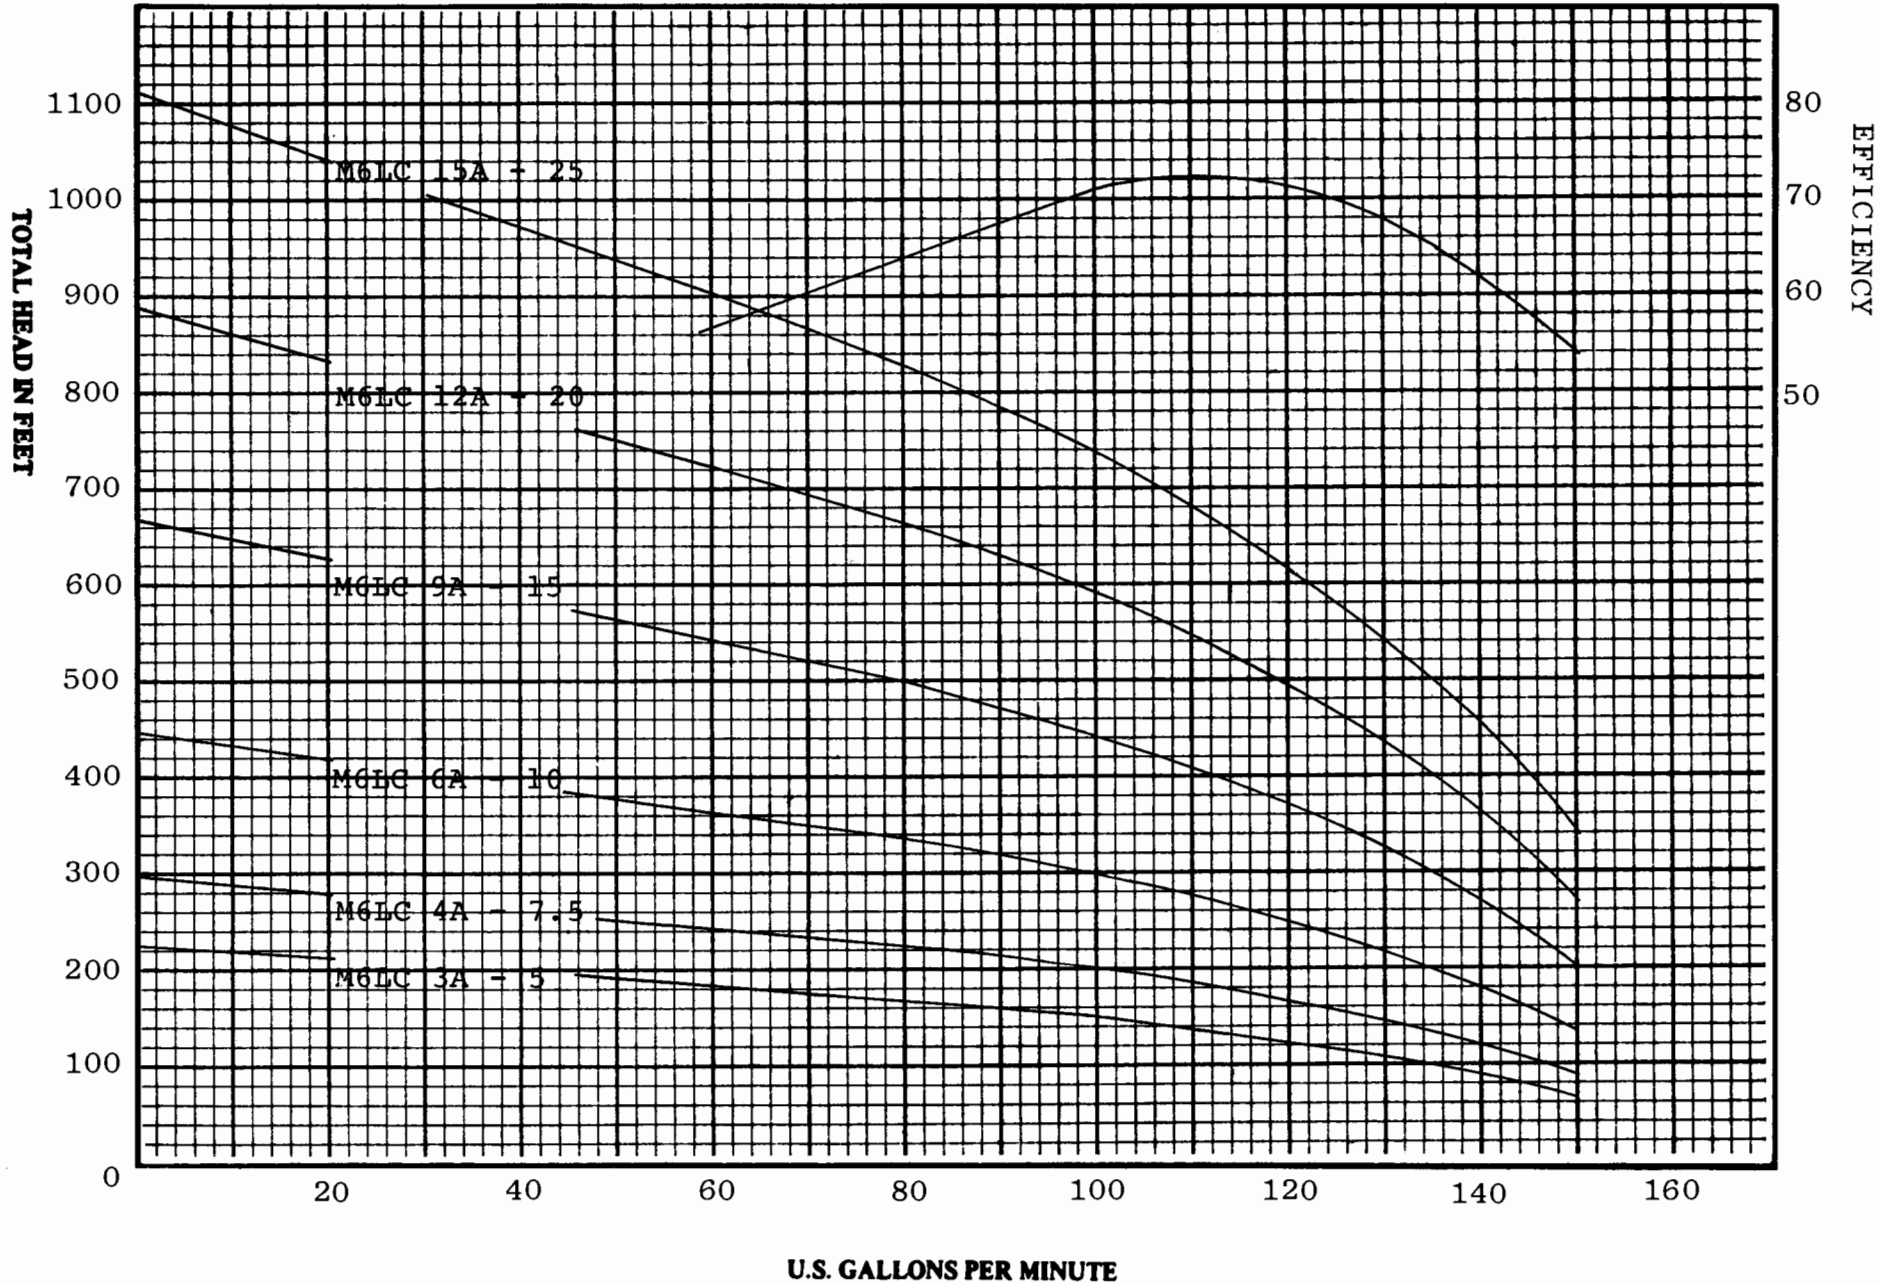


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.

PC NATIONAL
IN PUMP
GLENDALE, ARIZONA

SECTION - K
PAGE - 1
CURVE - 0924

M6LC
3450 RPM
JAN, 1980

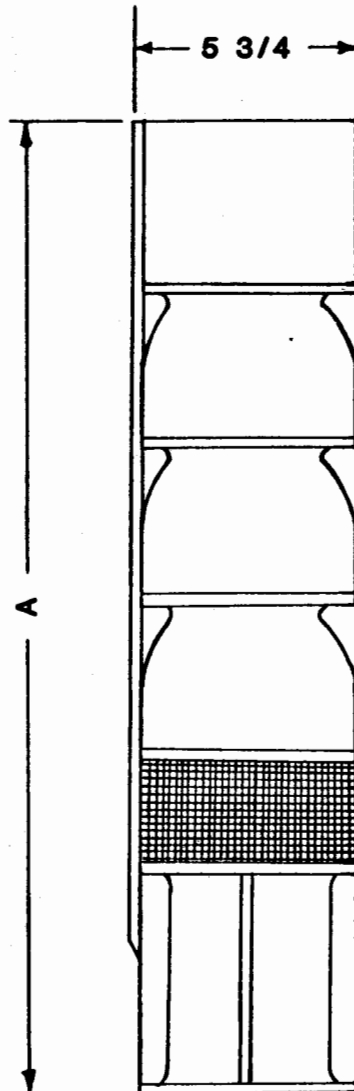

DIMENSIONS & SPECIFICATIONS

MODEL NO.	STAGES	H.P.	A LENGTH (INCHES)	APPROX. SHPG. WGT. (LBS.)
M6LC 3A-5	3	5	25.24	73
M6LC 4A-7.5	4	7.5	29.24	87
M6LC 6A-10	6	10	37.24	114
M6LC 9A-15	9	15	49.24	154
M6LC 12A-20	12	20	61.24	195
M6LC 15A-25	15	25	73.24	236

* This length is with a NEMA 6" motor. If a NEMA 4" motor is used add 2.5" to this length.

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	STAINLESS STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL

NOTE: This pump is normally prepared with 6" NEMA P submersible motor mount and 3" NPT column pipe threads. The pump can also be prepared for either 4" NPT column pipe threads or 4" NEMA P mounting.