


# M6MC

## SUBMERSIBLE PUMP PERFORMANCE


### 3450 RPM

3" NPT THREADS

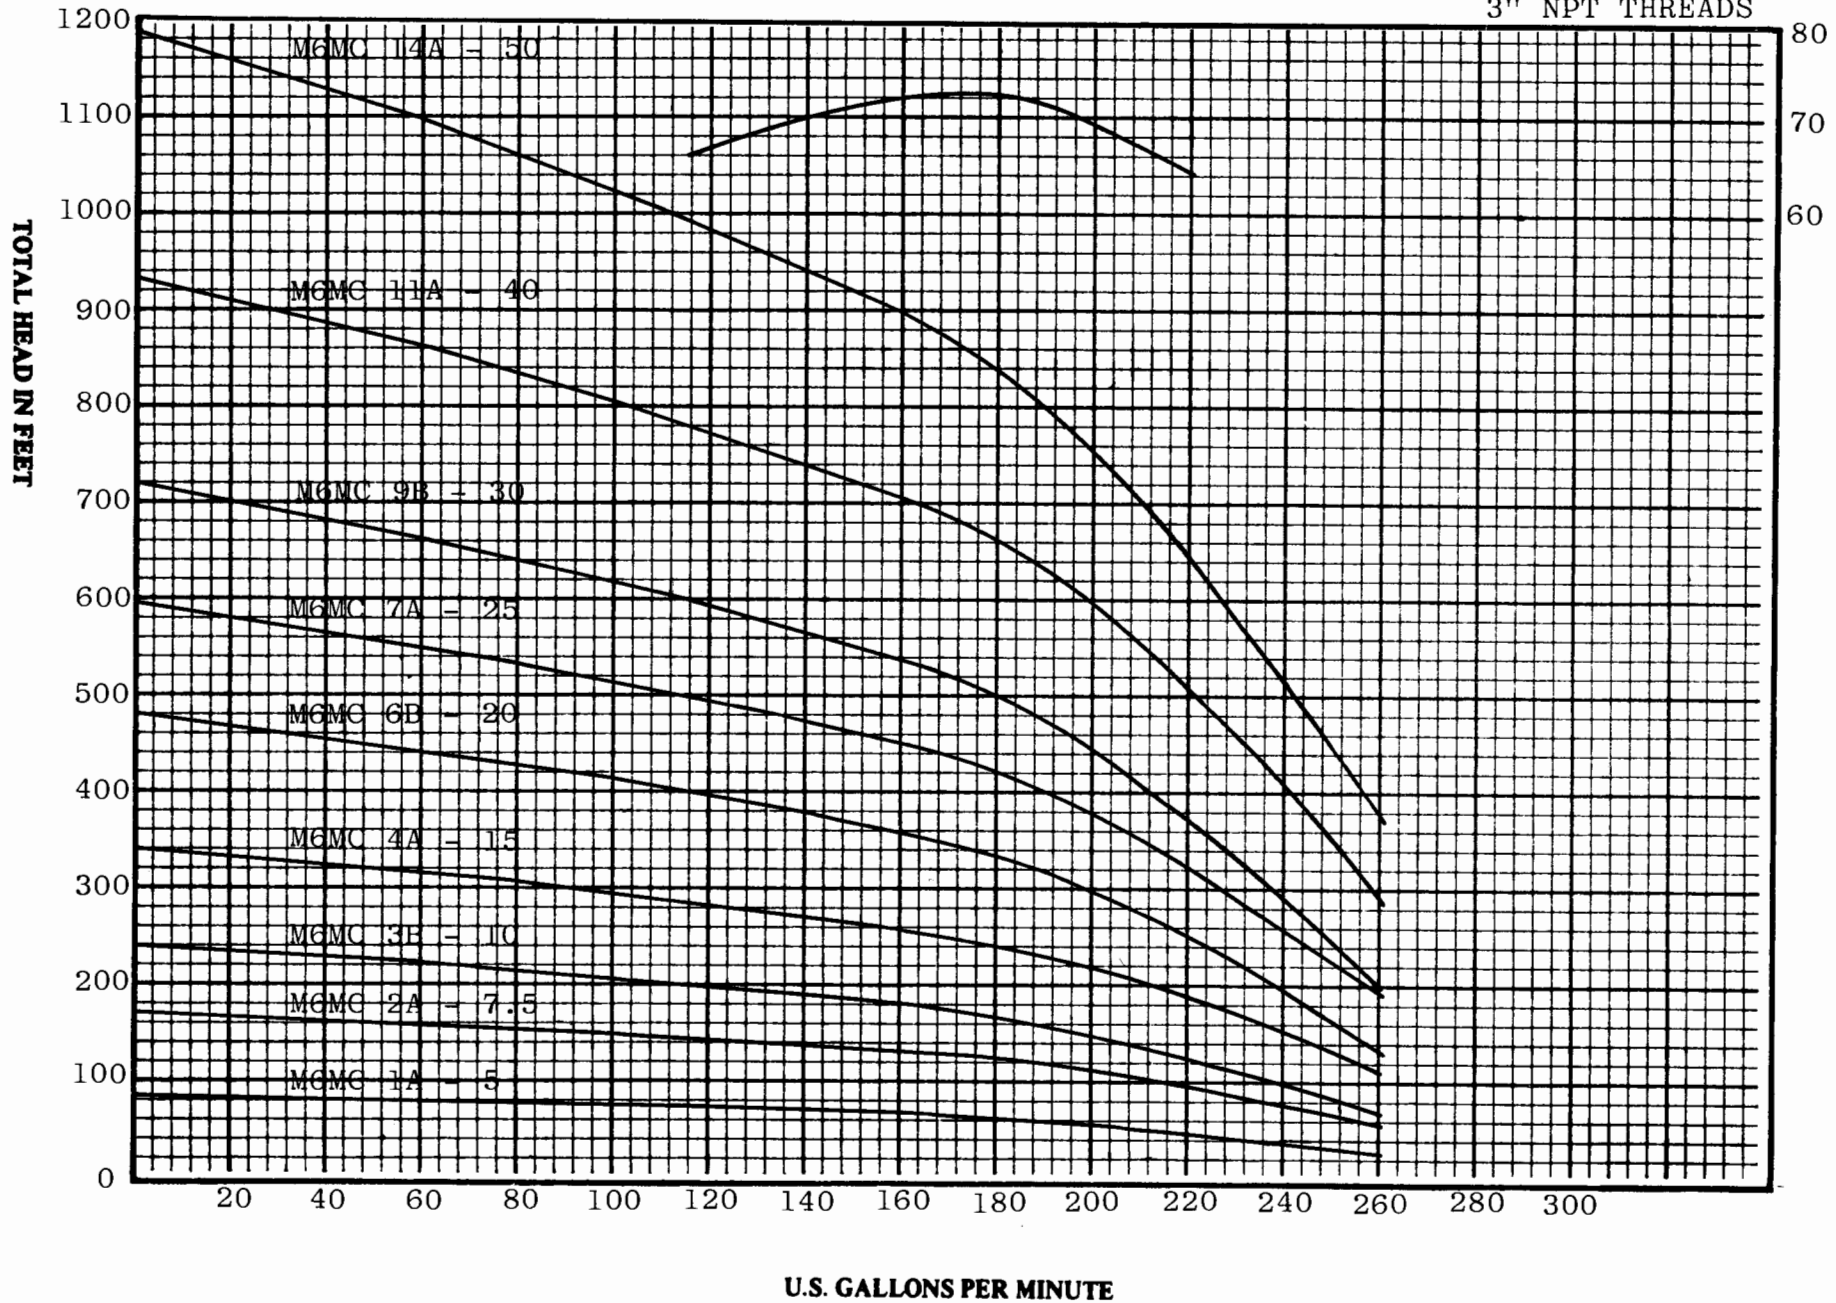

# M6MC

SUBMERSIBLE

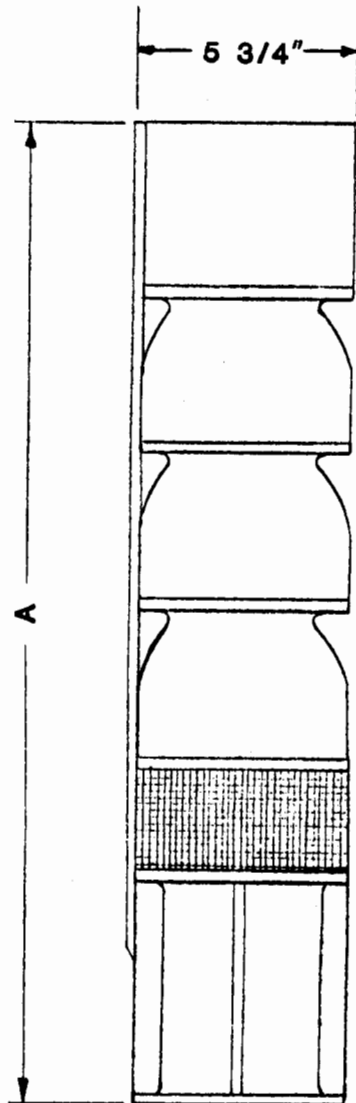

## DIMENSIONS & SPECIFICATIONS

| MODEL NO.   | STAGES | H.P. | A LENGTH<br>(INCHES) | APPROX.<br>SHPG. WGT.<br>(LBS.) |
|-------------|--------|------|----------------------|---------------------------------|
| M6MC 1A-5   | 1      | 5    | 17.25*               | 46                              |
| M6MC 2A-7.5 | 2      | 7.5  | 21.24                | 60                              |
| M6MC 3B-10  | 3      | 10   | 25.25                | 73                              |
| M6MC 4A-15  | 4      | 15   | 29.24                | 87                              |
| M6MC 6B-20  | 6      | 20   | 37.24                | 114                             |
| M6MC 7A-25  | 7      | 25   | 41.24                | 127                             |
| M6MC 9B-30  | 9      | 30   | 49.24                | 154                             |
| M6MC 11A-40 | 11     | 40   | 57.24                | 181                             |
| M6MC 14A-50 | 14     | 50   | 69.24                | 222                             |

\* This length is with a NEMA 6" motor. If a NEMA 4" motor is used add 2.5" to this length.

## MATERIALS OF CONSTRUCTION

| DESCRIPTION | MATERIAL        | DESCRIPTION  | MATERIAL        |
|-------------|-----------------|--------------|-----------------|
| BOWL        | CAST IRON       | THRUST ASSY. | BRONZE          |
| IMPELLER    | BRONZE          | BOLTS        | STAINLESS STEEL |
| SHAFT       | STAINLESS STEEL | SCREEN       | STAINLESS STEEL |
| BEARING     | BRONZE          | CABLE GUARD  | STAINLESS STEEL |

NOTE: This pump is normally prepared with 6" NEMA P submersible motor mount and 3" NPT column pipe threads. The pump can also be prepared for either 4" NPT column pipe threads or 4" NEMA P mounting.