

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA

SECTION -
PAGE -
SEPT. 17, 1984

S4HC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

TOTAL HEAD IN FEET

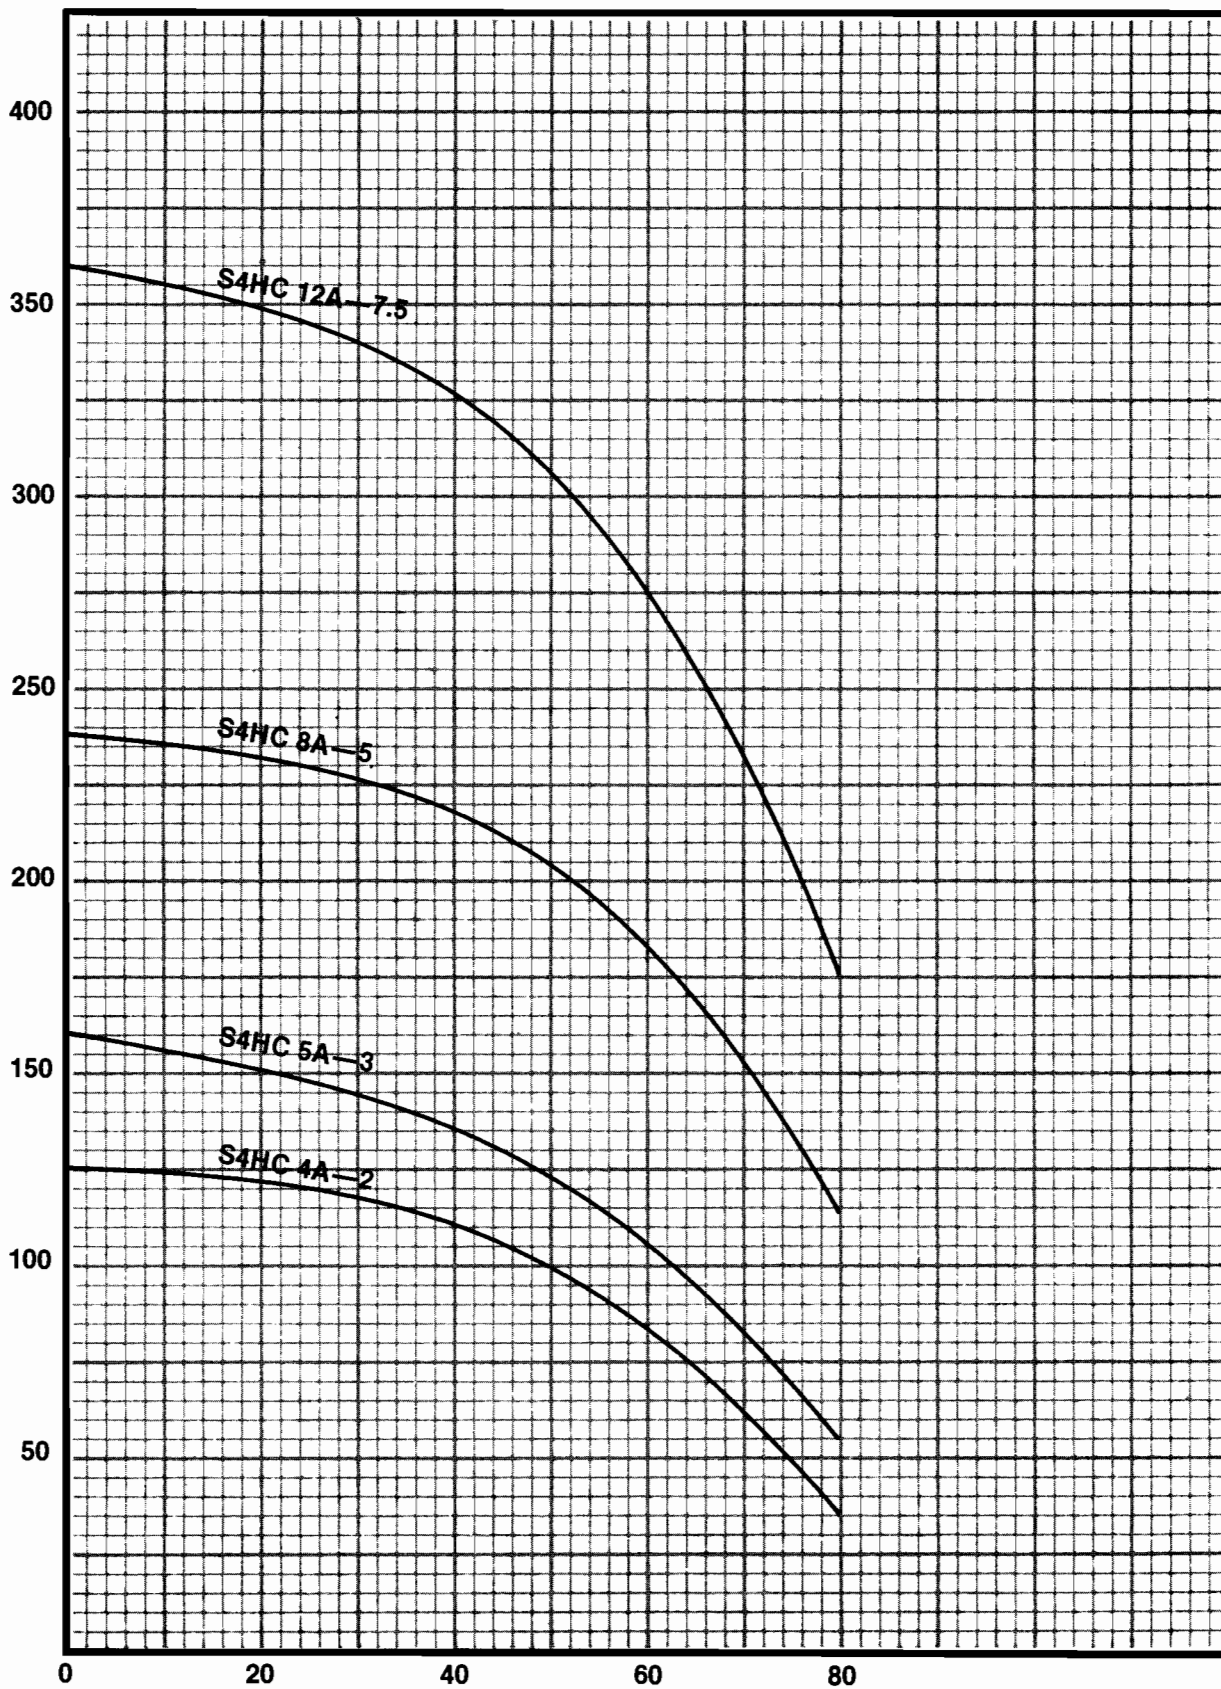


U.S. GALLONS PER MINUTE

**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

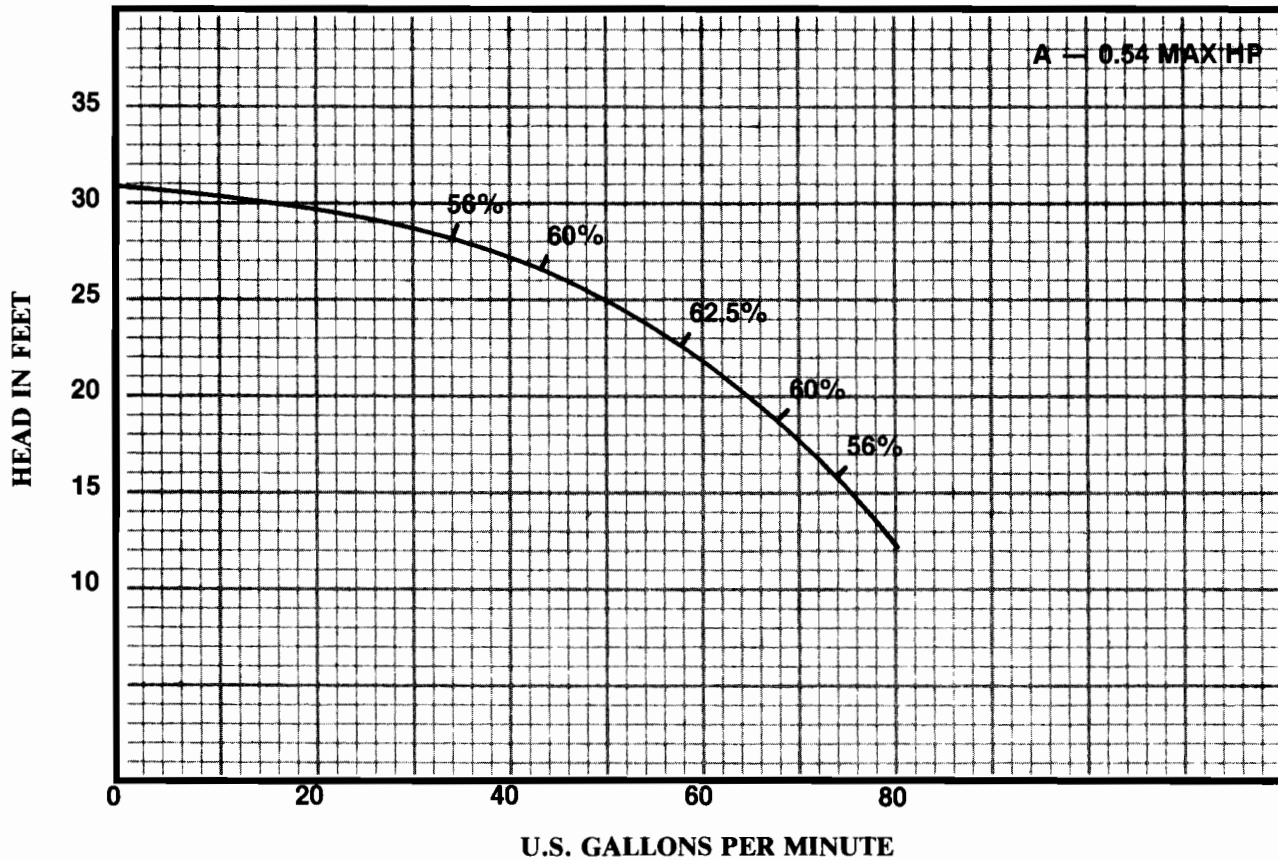

DIMENSIONS & SPECIFICATIONS

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S4HC 4A—2	4	2	25.125	84
S4HC 5A—3	5	3	28.750	96
S4HC 8A—5	8	5	39.500	132
S4HC 12A—7.5	12	7.5	53.875	180

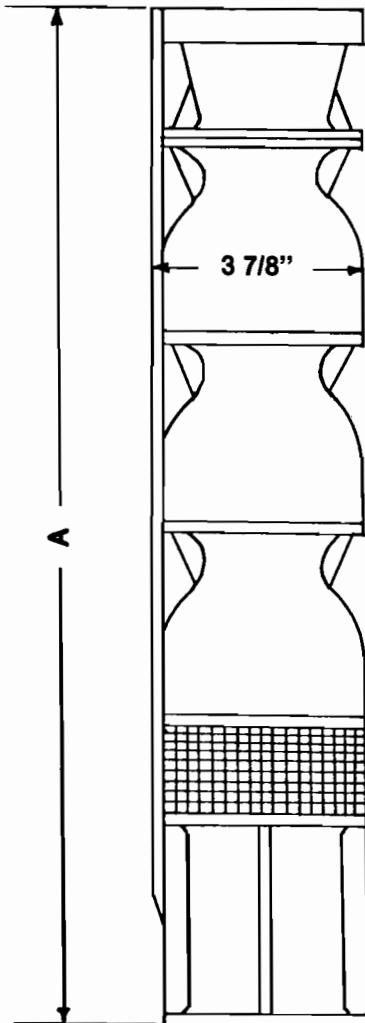

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL