

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA


SECTION -
PAGE -
SEPT. 17, 1984

S4LC

**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

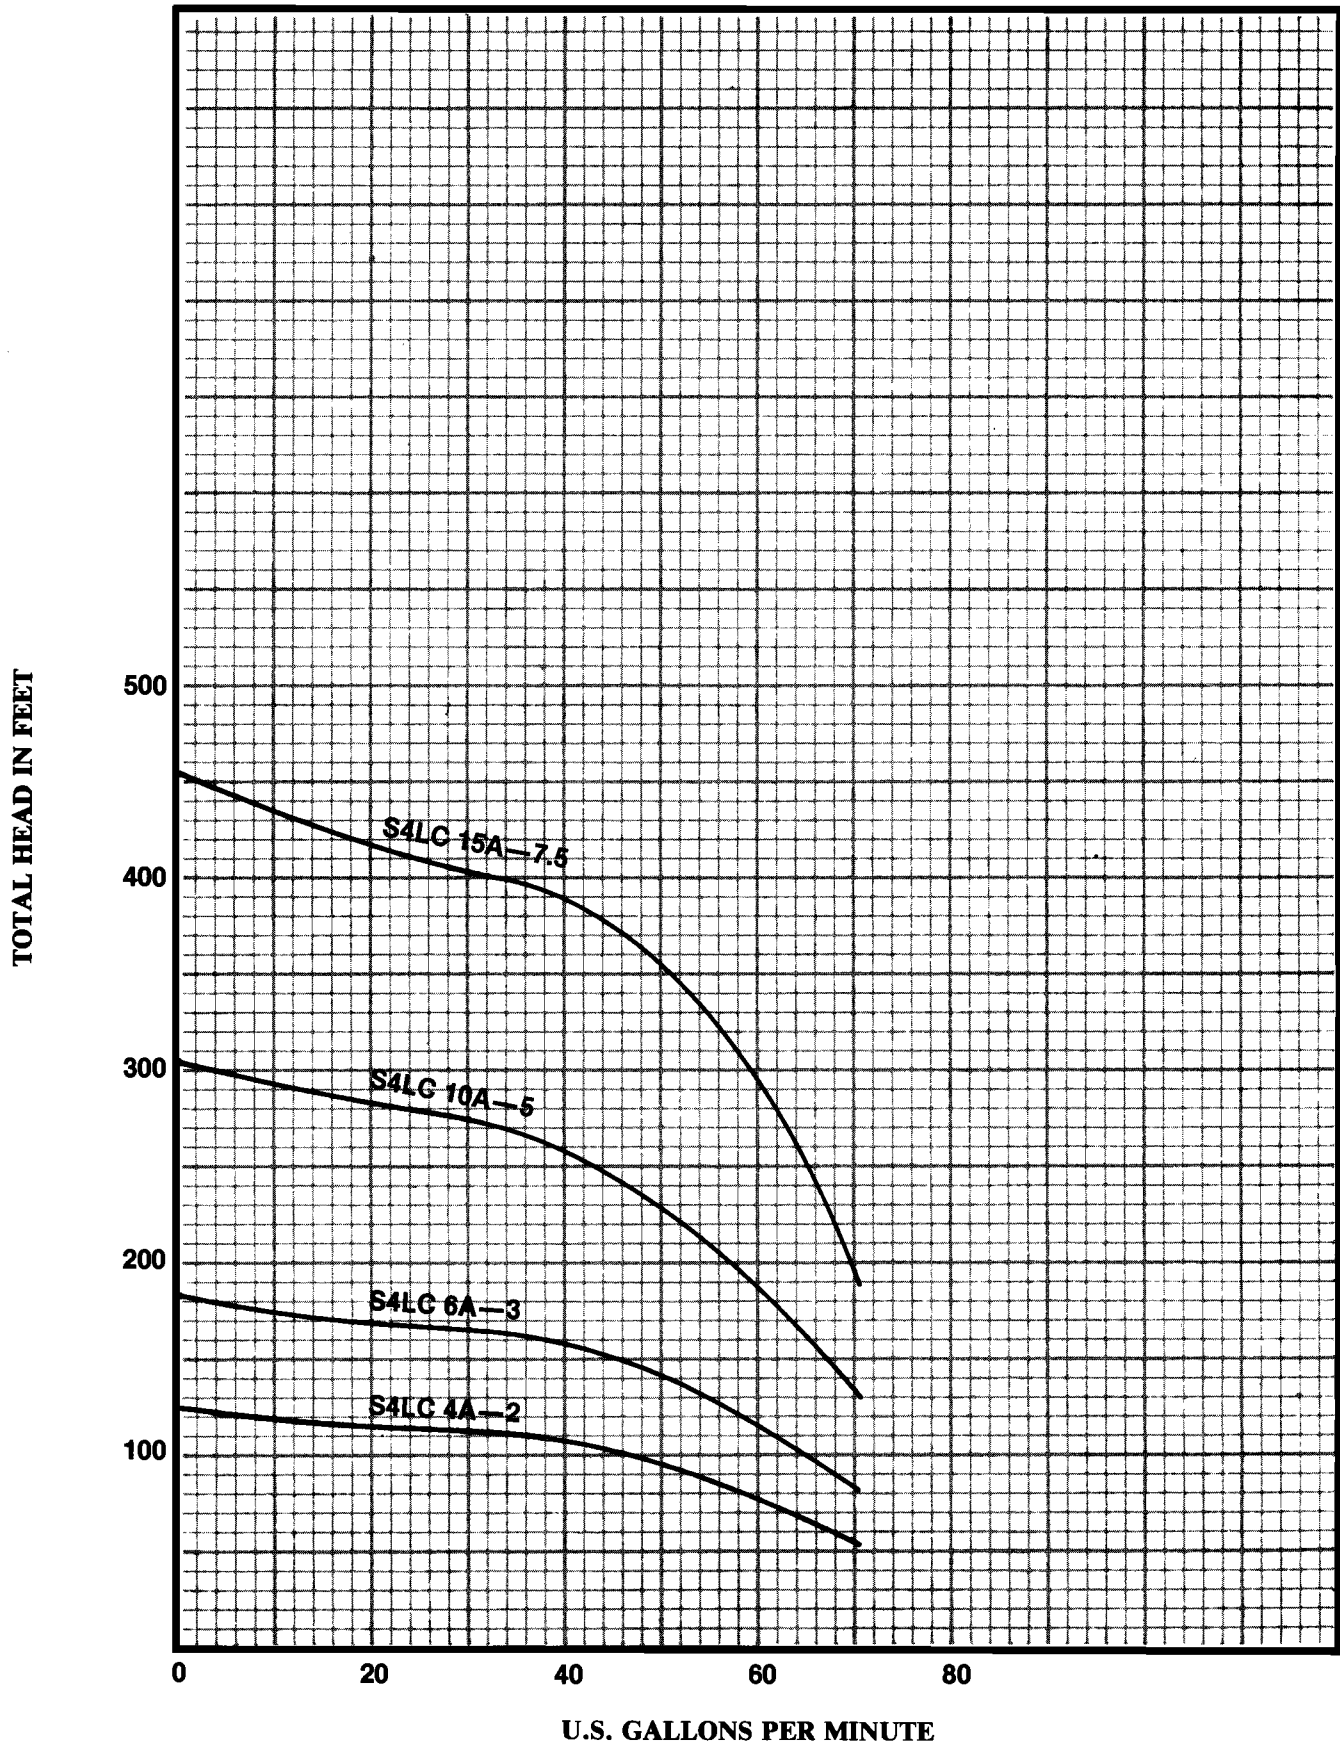


**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

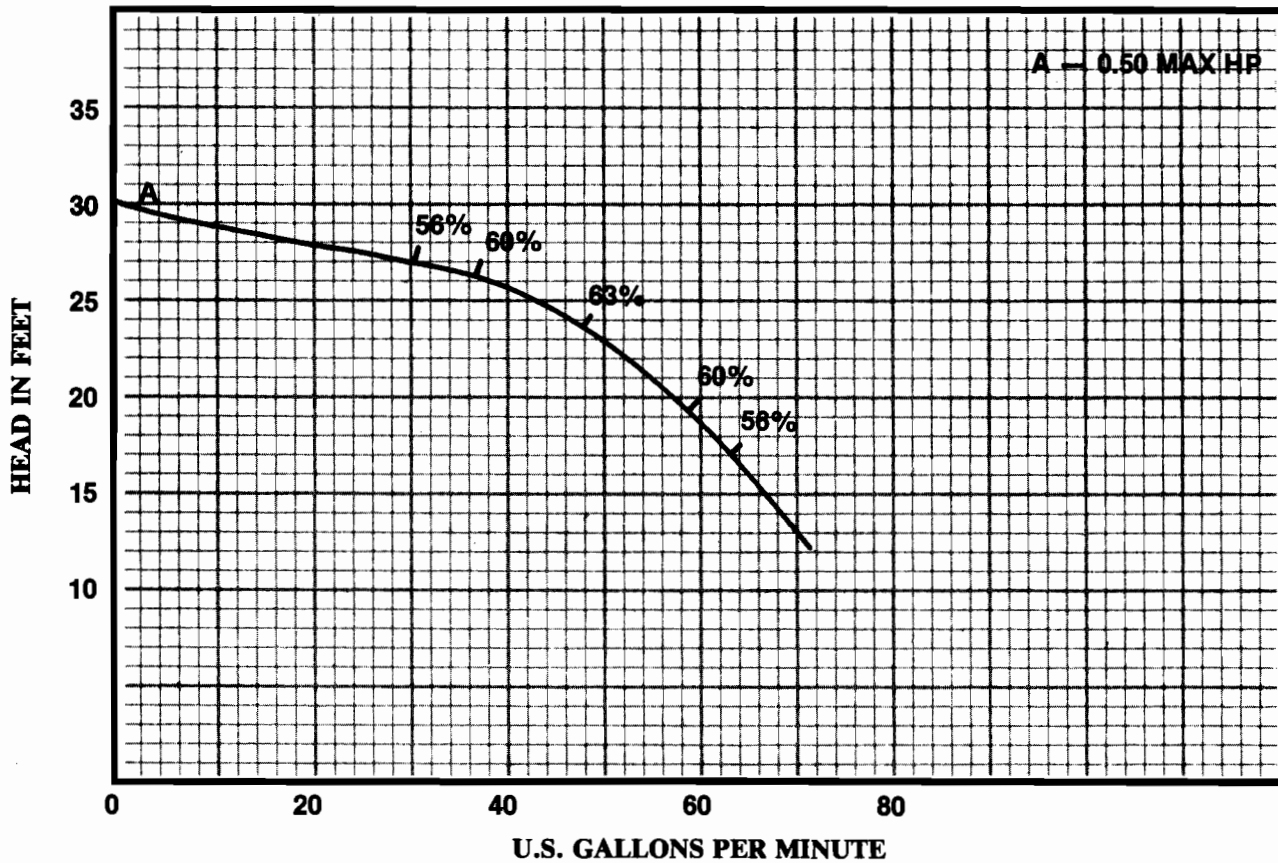

ONE STAGE PERFORMANCE
S4LC

DIMENSIONS & SPECIFICATIONS

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S4LC 4A—2	4	2	25.125	84
S4LC 6A—3	6	3	32.375	108
S4LC 10A—5	10	5	46.750	156
S4LC 15A—7.5	15	7.5	64.750	216

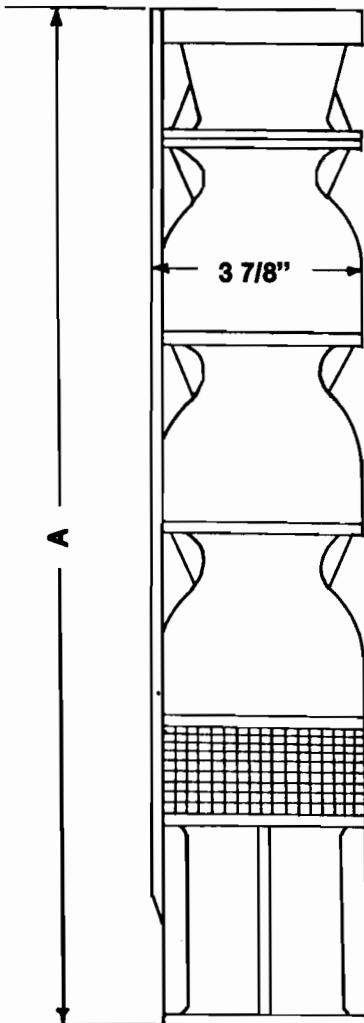

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL