

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA


SECTION - C-S
PAGE - 3
APR. 1, 1982

S6HC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

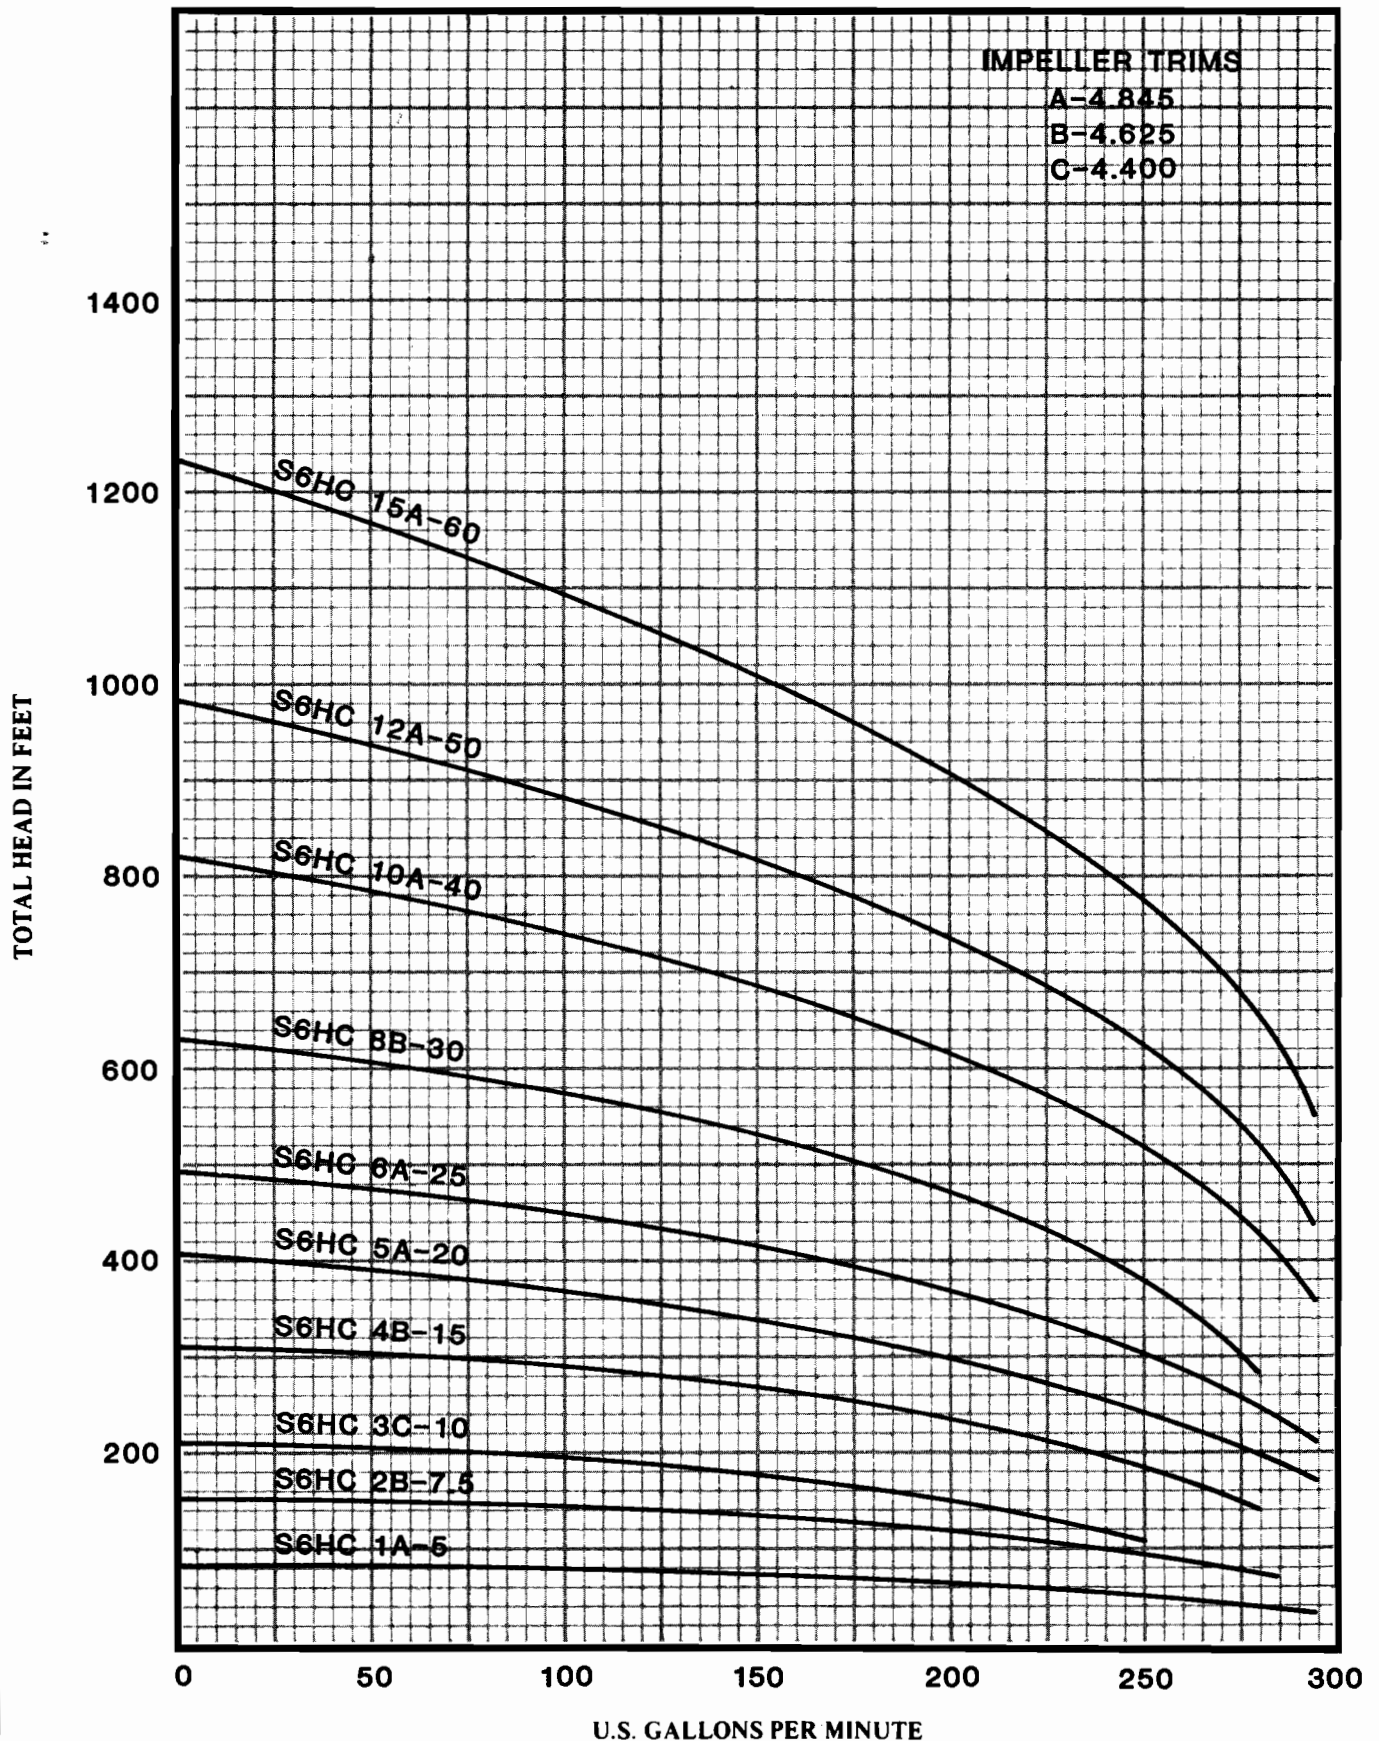

SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

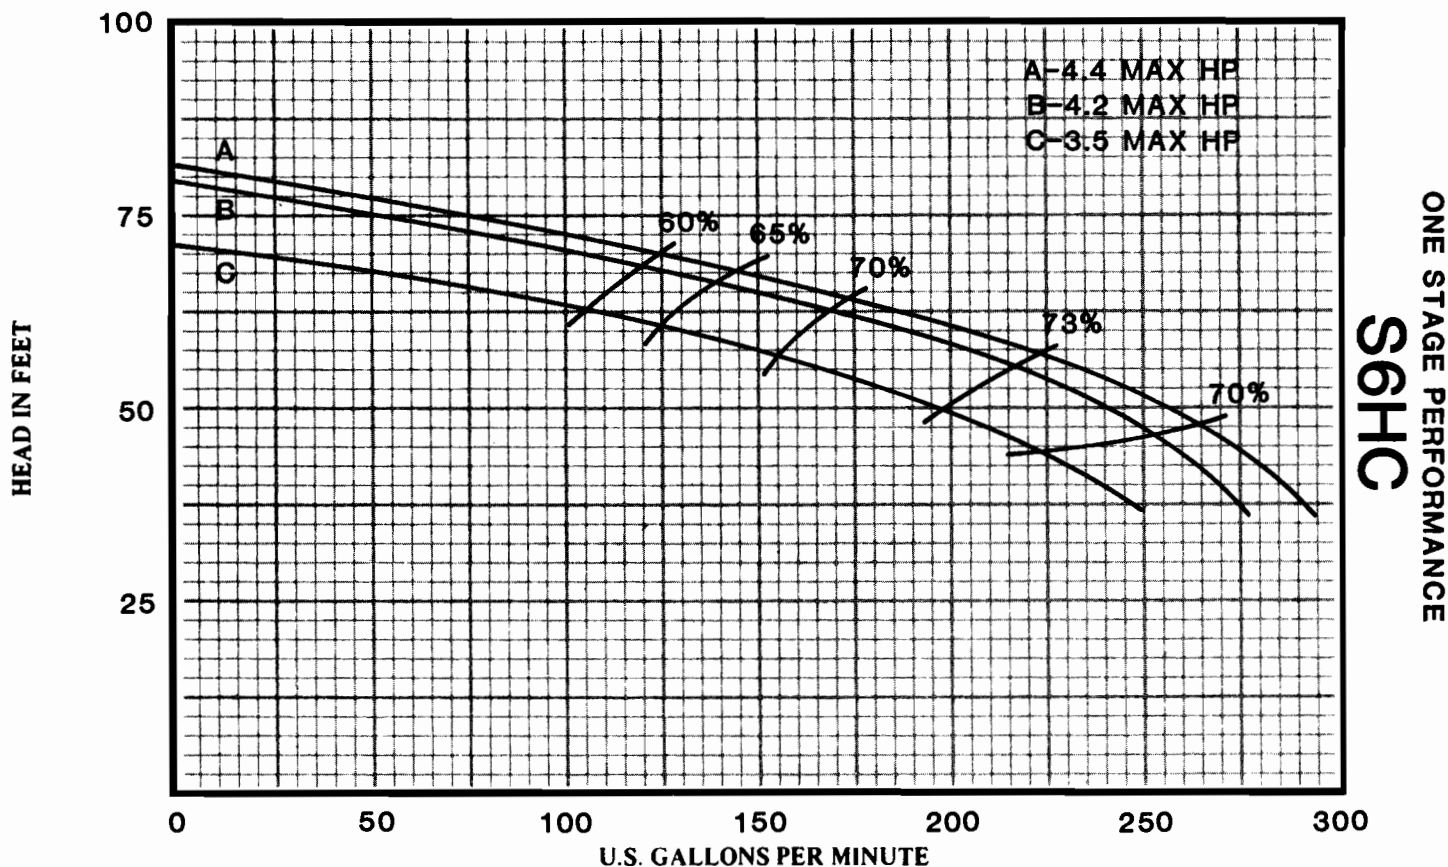

DIMENSIONS & SPECIFICATIONS

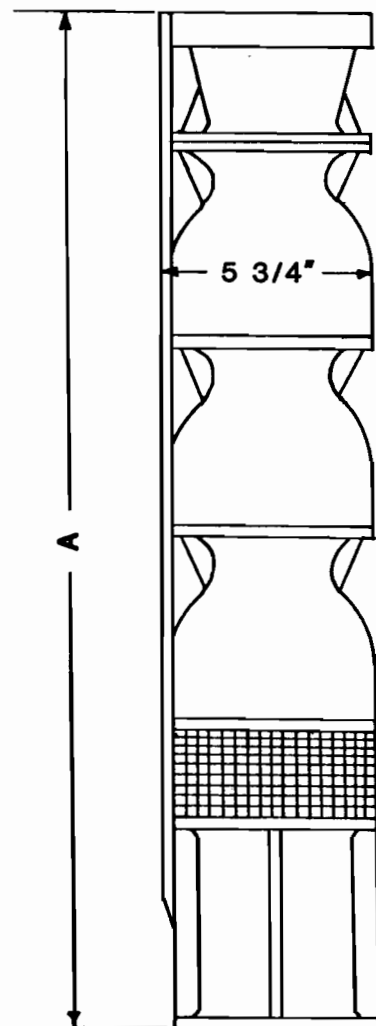

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S6HC 1A-5	1	5	17.25	46
S6HC 2B-7.5	2	7.5	21.25	60
S6HC 3C-10	3	10	25.25	74
S6HC 4B-15	4	15	29.25	88
S6HC 5A-20	5	20	33.25	102
S6HC 6A-25	6	25	37.25	116
S6HC 8B-30	8	30	45.25	144
S6HC 10A-40	10	40	53.25	172
S6HC 12A-50	12	50	61.25	200
S6HC 15A-60	15	60	73.25	242

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL