

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA

SECTION - C-S
PAGE - 1
APR. 1, 1982


S6LC

**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

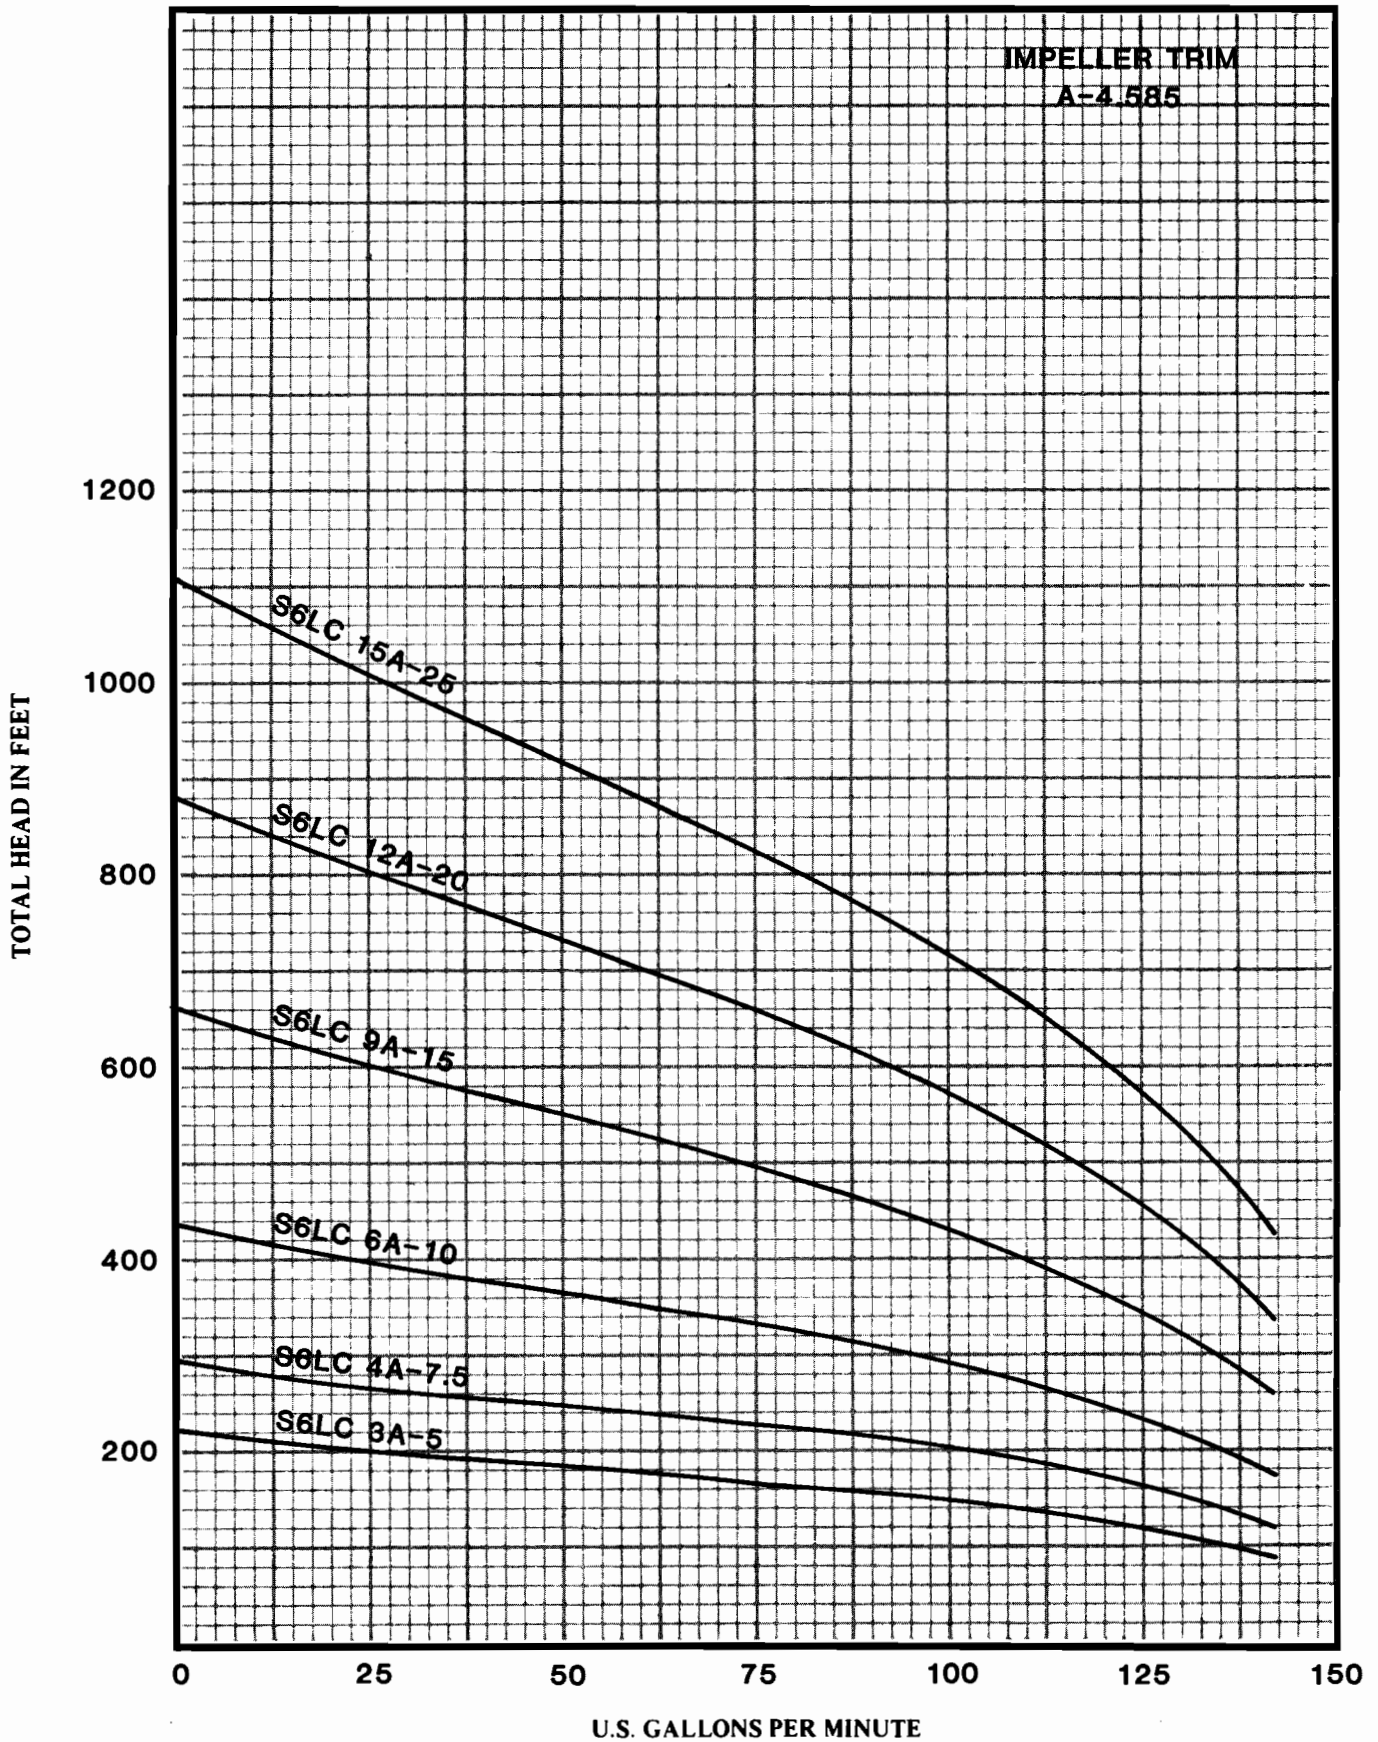


SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

ONE STAGE PERFORMANCE
S6LC

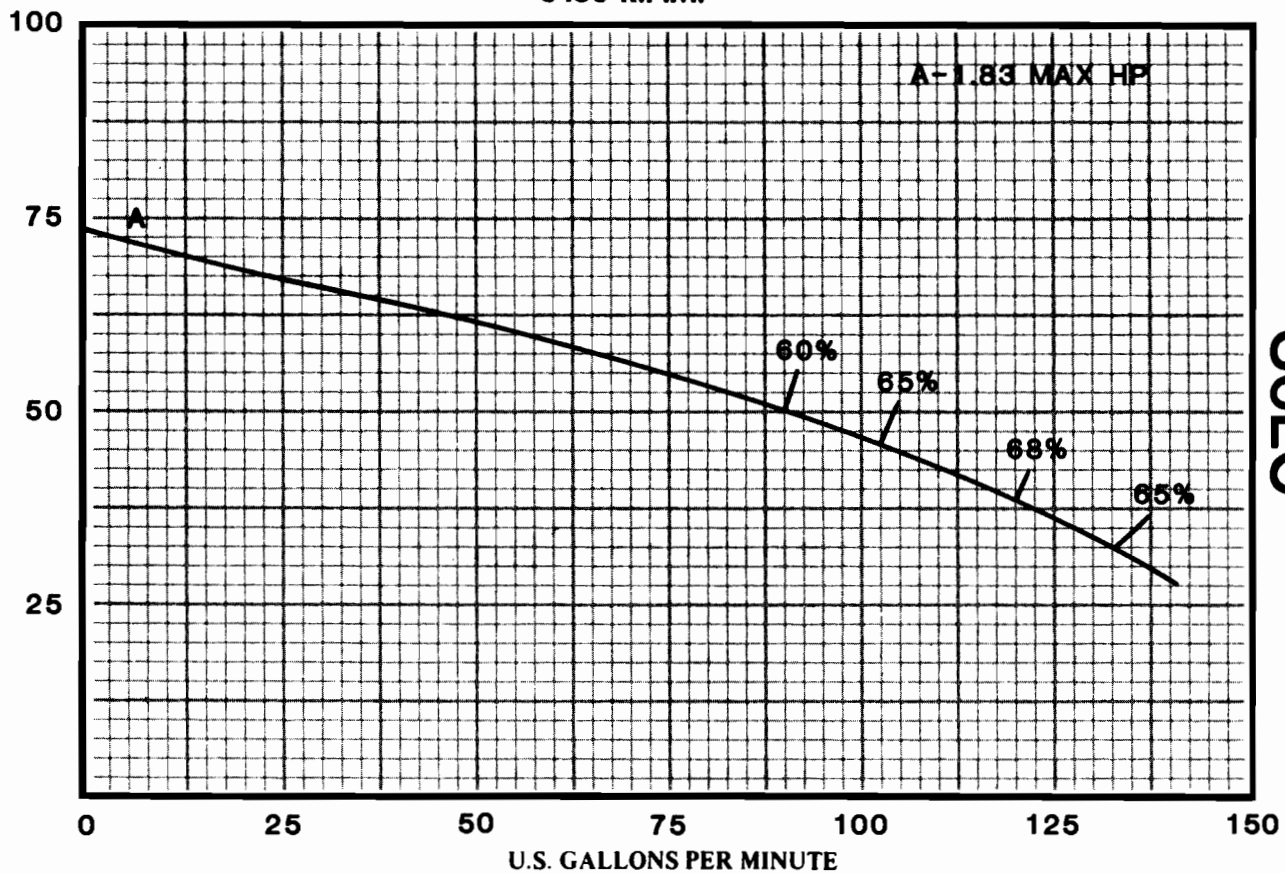

DIMENSIONS & SPECIFICATIONS

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S6LC 3A-5	3	5	25.25	74
S6LC 4A-7.5	4	7.5	29.25	88
S6LC 6A-10	6	10	37.25	116
S6LC 9A-15	9	15	49.25	158
S6LC 12A-20	12	20	61.25	200
S6LC 15A-25	15	25	73.25	242

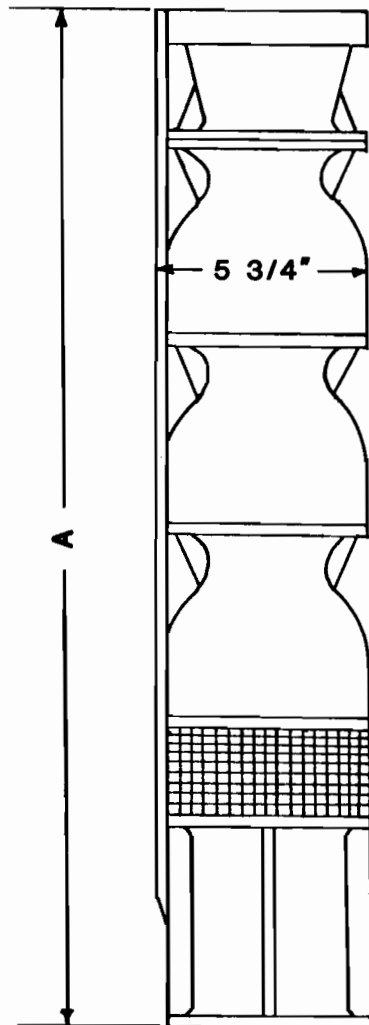

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL