

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA


SECTION - C-S
PAGE - 2
APR. 1, 1982

S6MC


**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

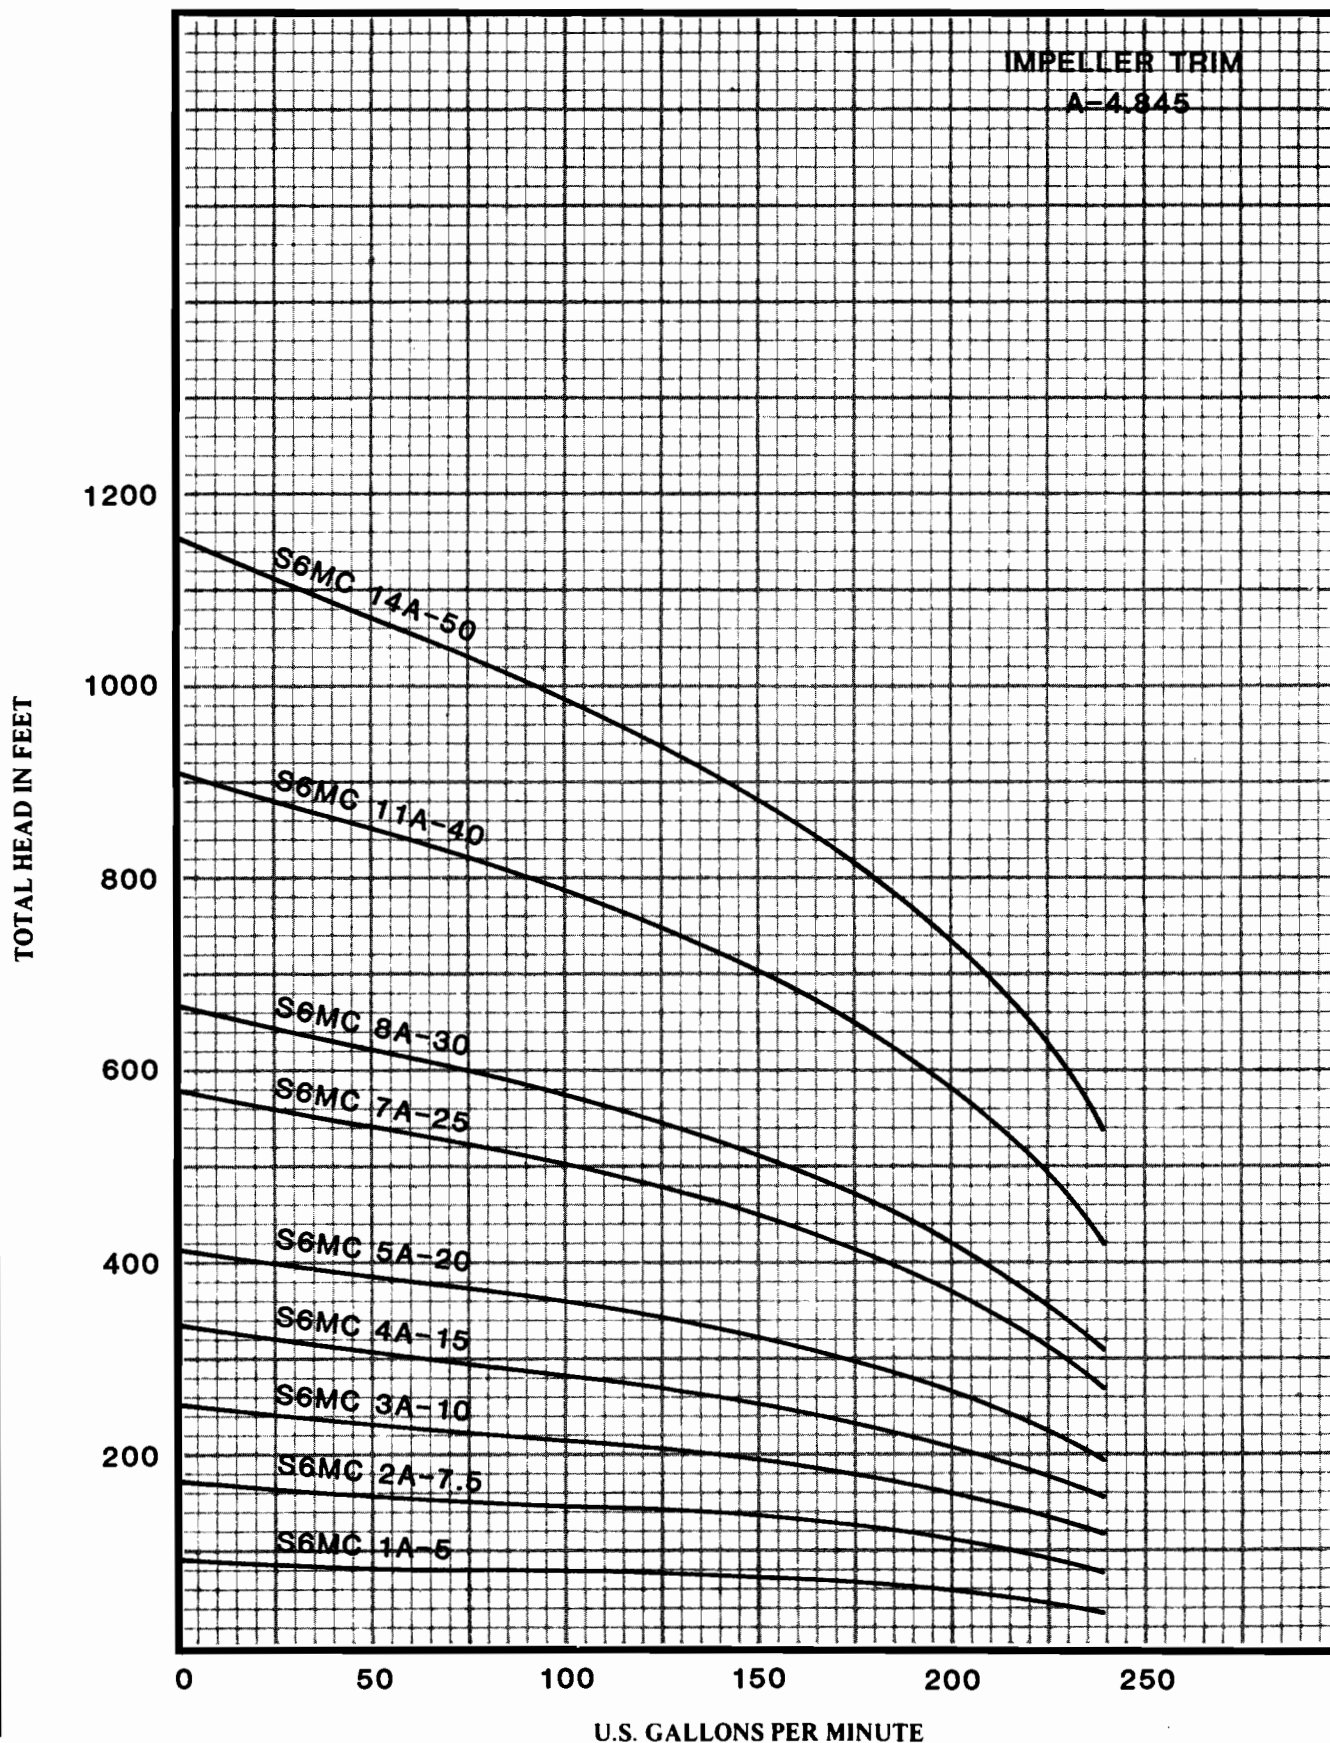

SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

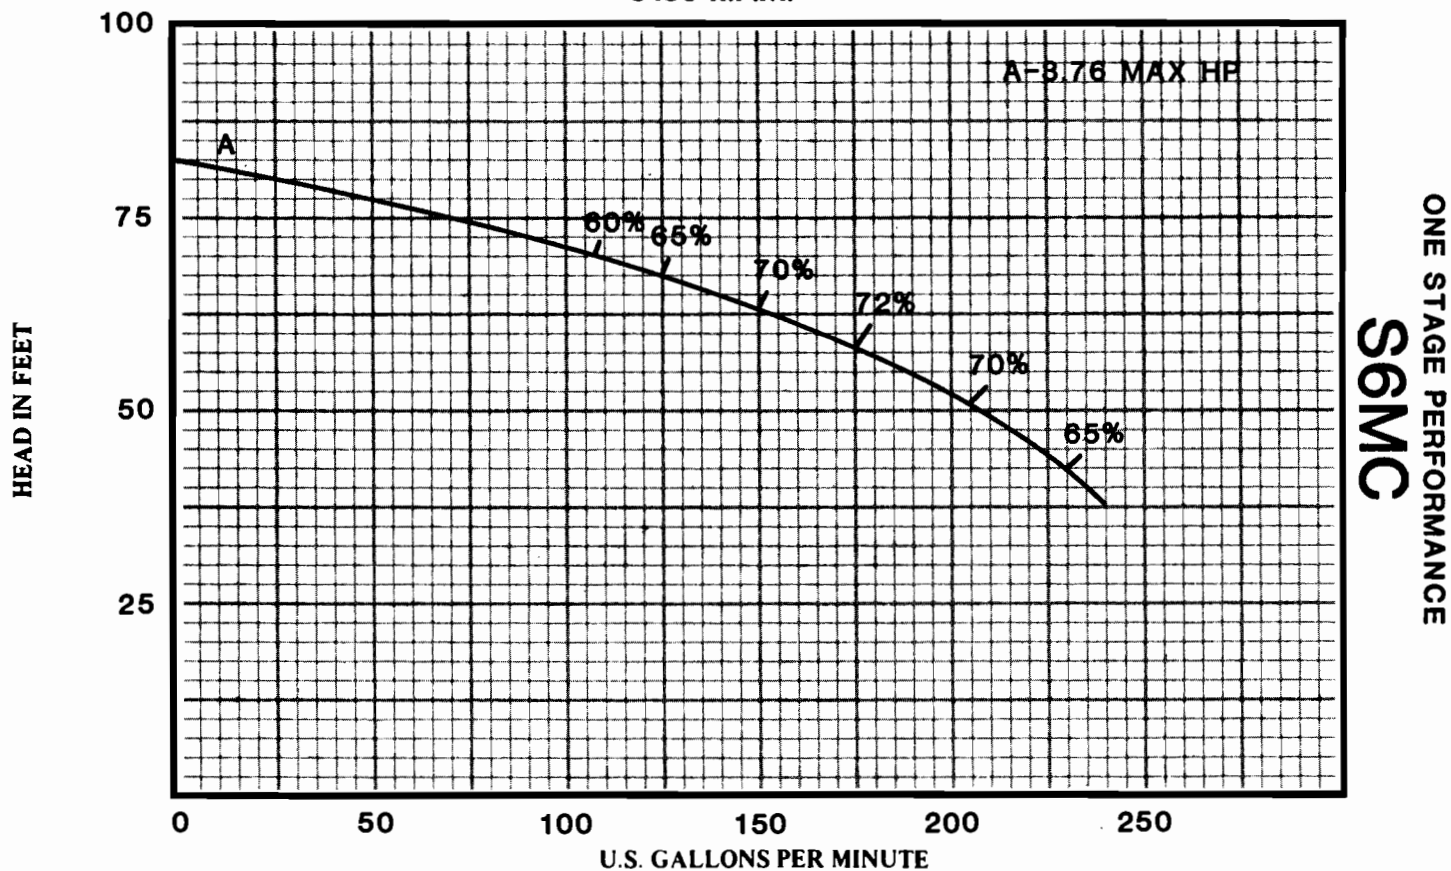

DIMENSIONS & SPECIFICATIONS

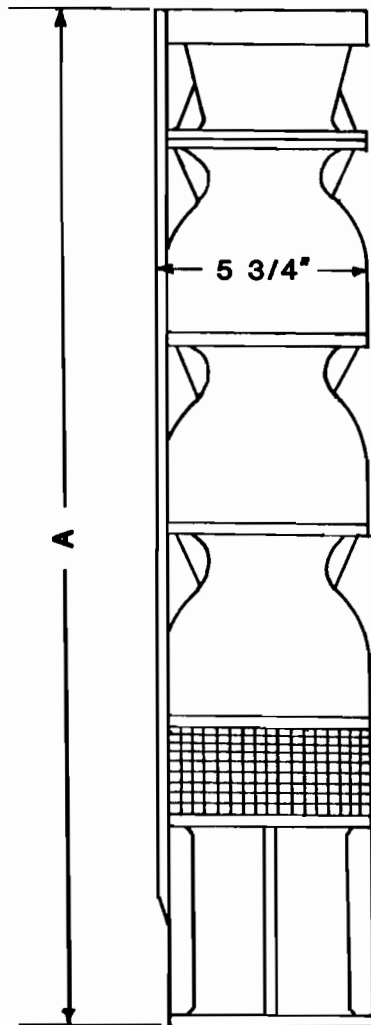

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S6MC 1A-5	1	5	17.25	46
S6MC 2A-7.5	2	7.5	21.25	60
S6MC 3A-10	3	10	25.25	74
S6MC 4A-15	4	15	29.25	88
S6MC 5A-20	5	20	33.25	102
S6MC 7A-25	7	25	41.25	130
S6MC 8A-30	8	30	45.25	144
S6MC 11A-40	11	40	57.25	186
S6MC 14A-50	14	50	69.25	228

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL