

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA


SECTION - C-S
PAGE - 5
APR. 1, 1982

S6XHC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

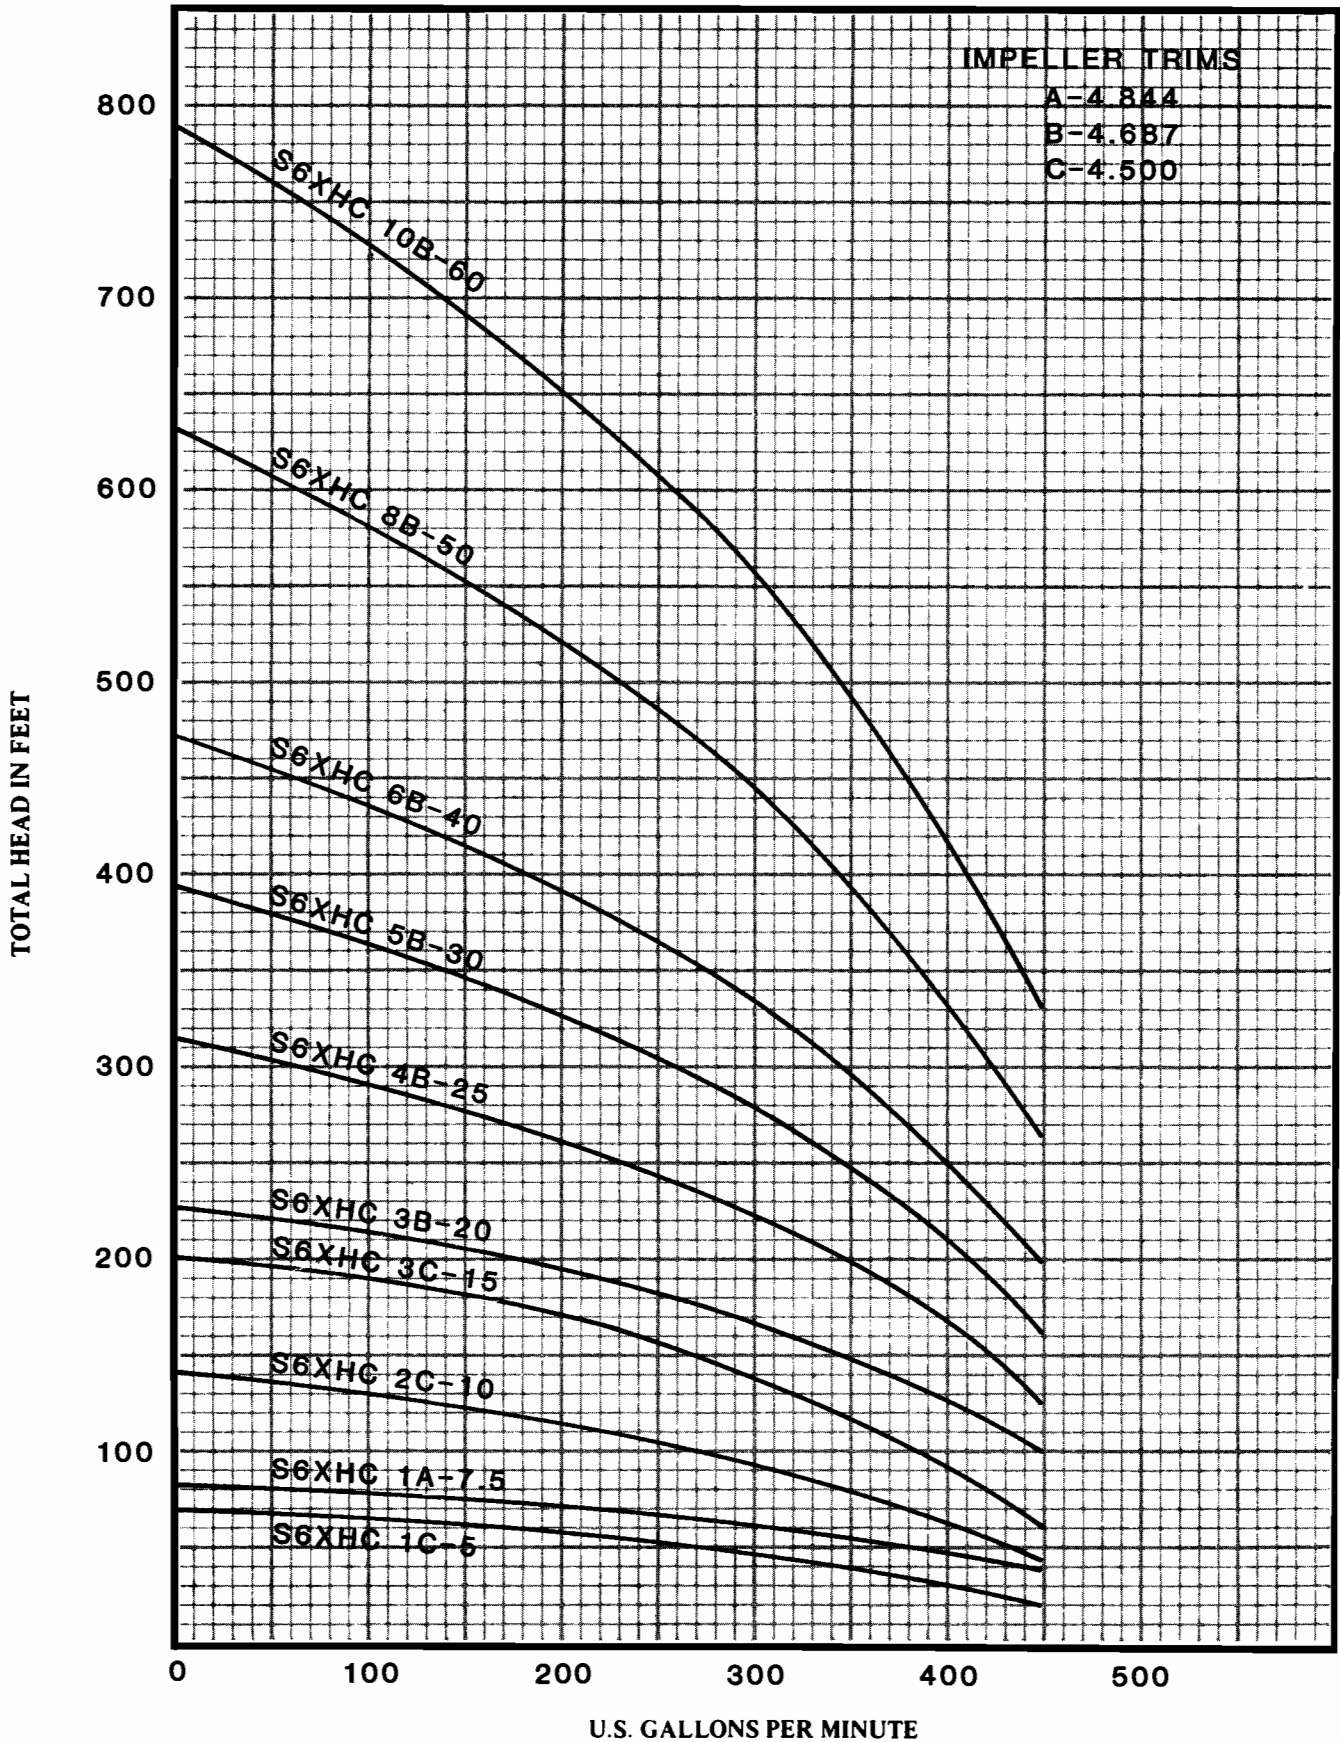

SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

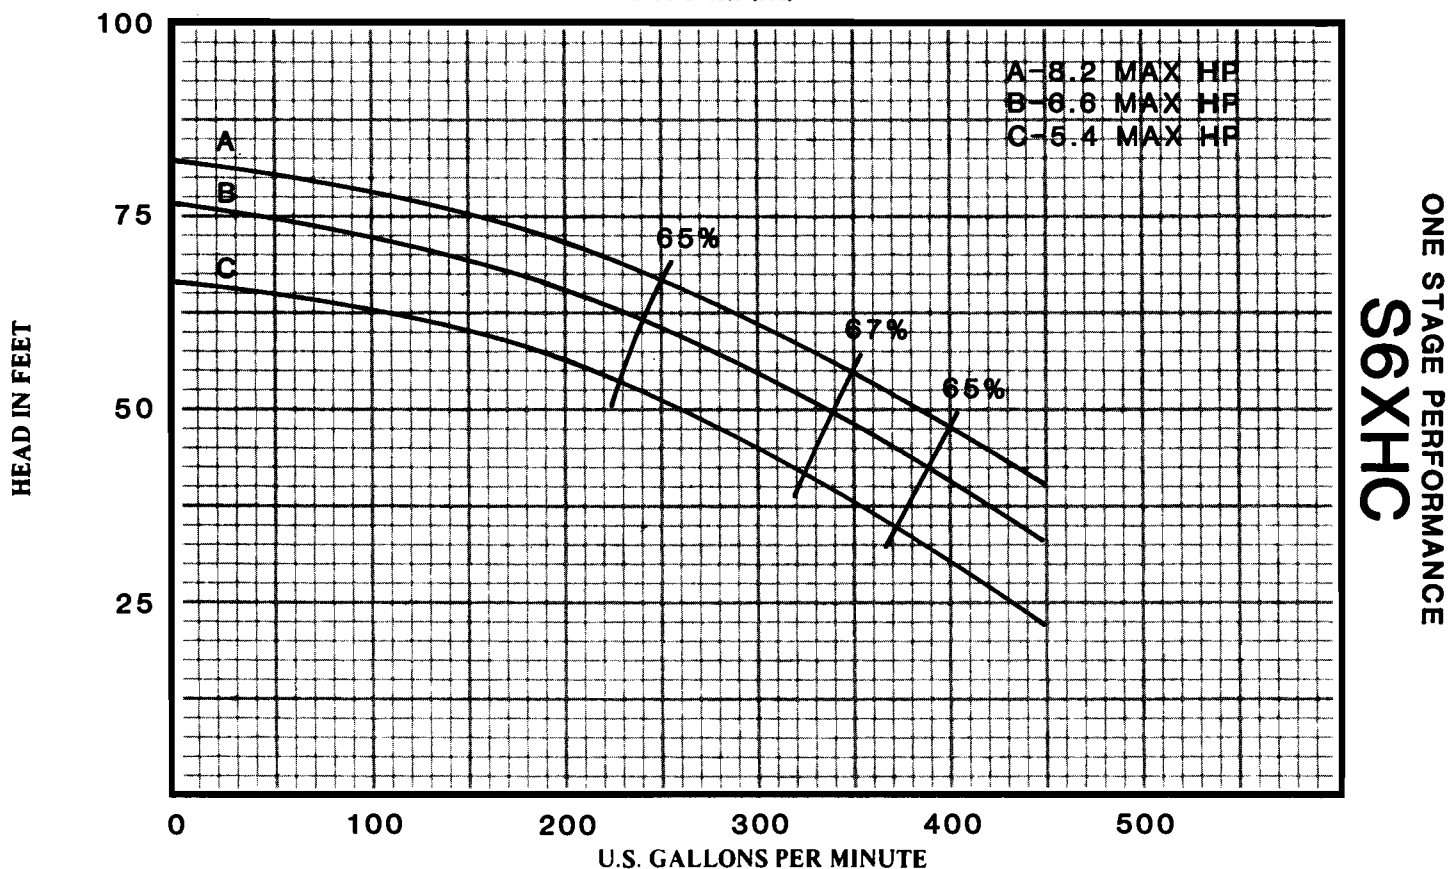

DIMENSIONS & SPECIFICATIONS

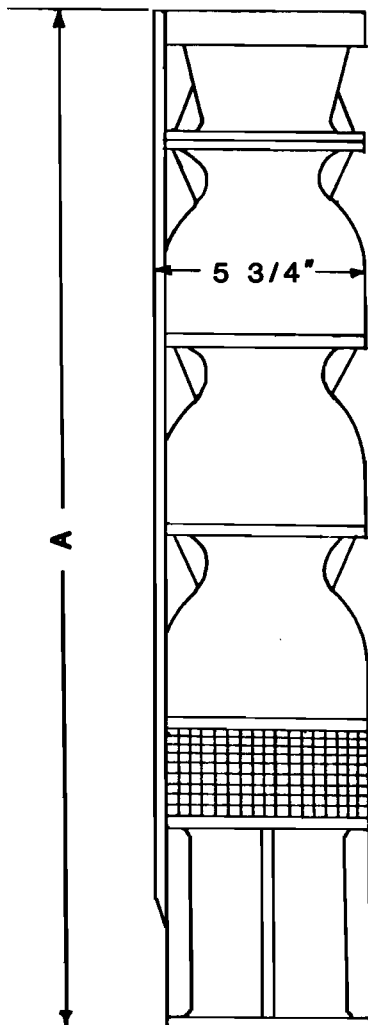

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S6XHC 1C-5	1	5	19.75	60
S6XHC 1A-7.5	1	7.5	19.75	60
S6XHC 2C-10	2	10	26.25	85
S6XHC 3C-15	3	15	32.75	110
S6XHC 3B-20	3	20	32.75	110
S6XHC 4B-25	4	25	39.25	135
S6XHC 5B-30	5	30	45.75	160
S6XHC 6B-40	6	40	52.25	185
S6XHC 8B-50	8	50	65.25	235
S6XHC 10B-60	10	60	78.25	285

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL