

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA

SECTION - D-S
PAGE - 3
APR. 1, 1982


S8HC

SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

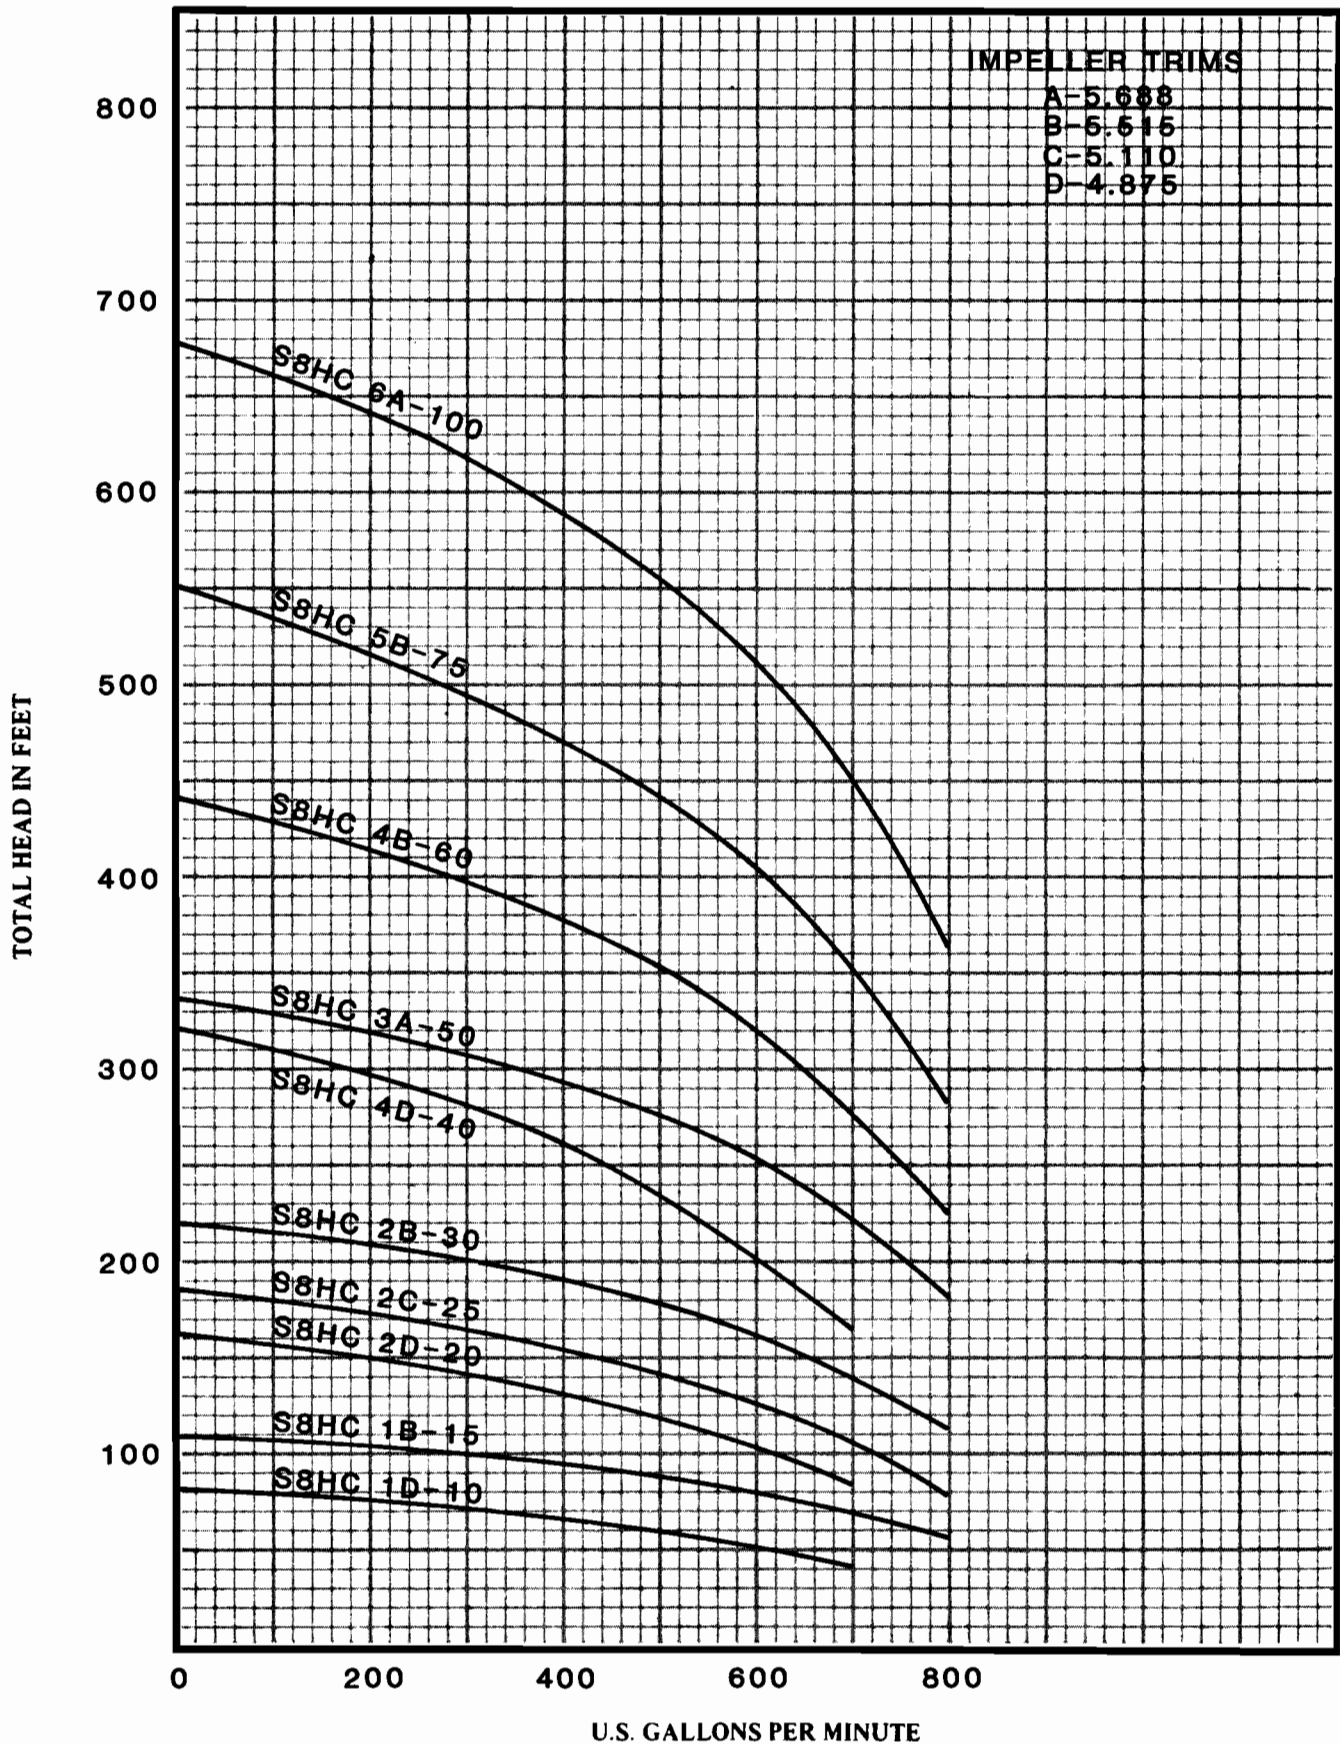


SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

ONE STAGE PERFORMANCE S8HC

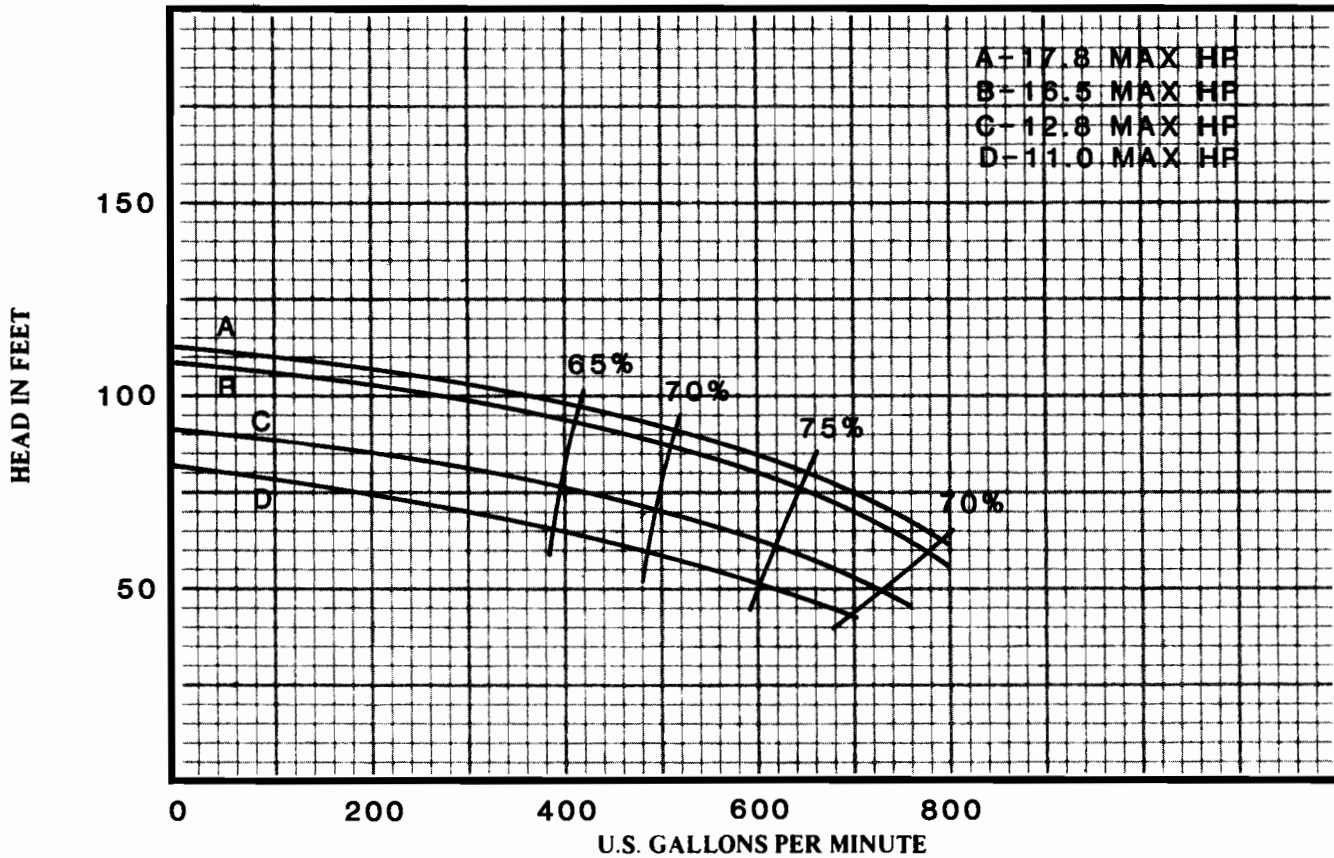

DIMENSIONS & SPECIFICATIONS

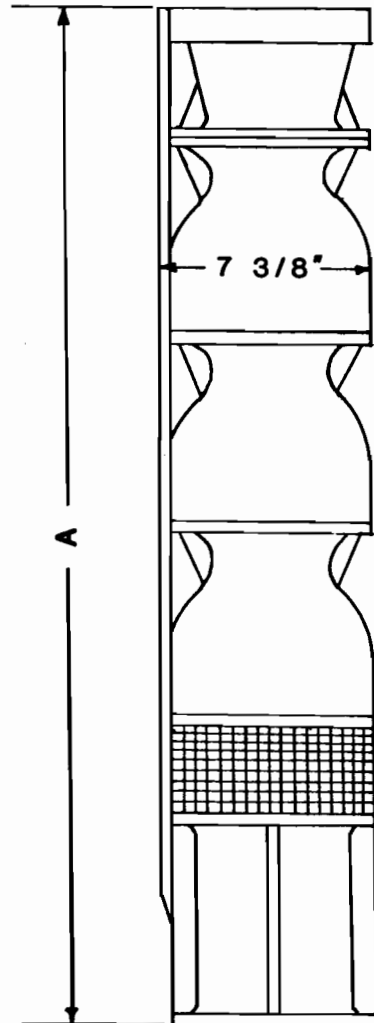

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S8HC 1D-10	1	10	27.75	115
S8HC 1B-15	1	15	27.75	115
S8HC 2D-20	2	20	34.50	150
S8HC 2C-25	2	25	34.50	150
S8HC 2B-30	2	30	34.50	150
S8HC 4D-40	4	40	48.00	220
S8HC 3A-50	3	50	41.25	185
S8HC 4B-60	4	60	48.00	220
S8HC 5B-75	5	75	54.75	255
S8HC 6A-100	6	100	61.50	290

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL