

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA


SECTION - D-S
PAGE - 2
APR. 1, 1982

S8LC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

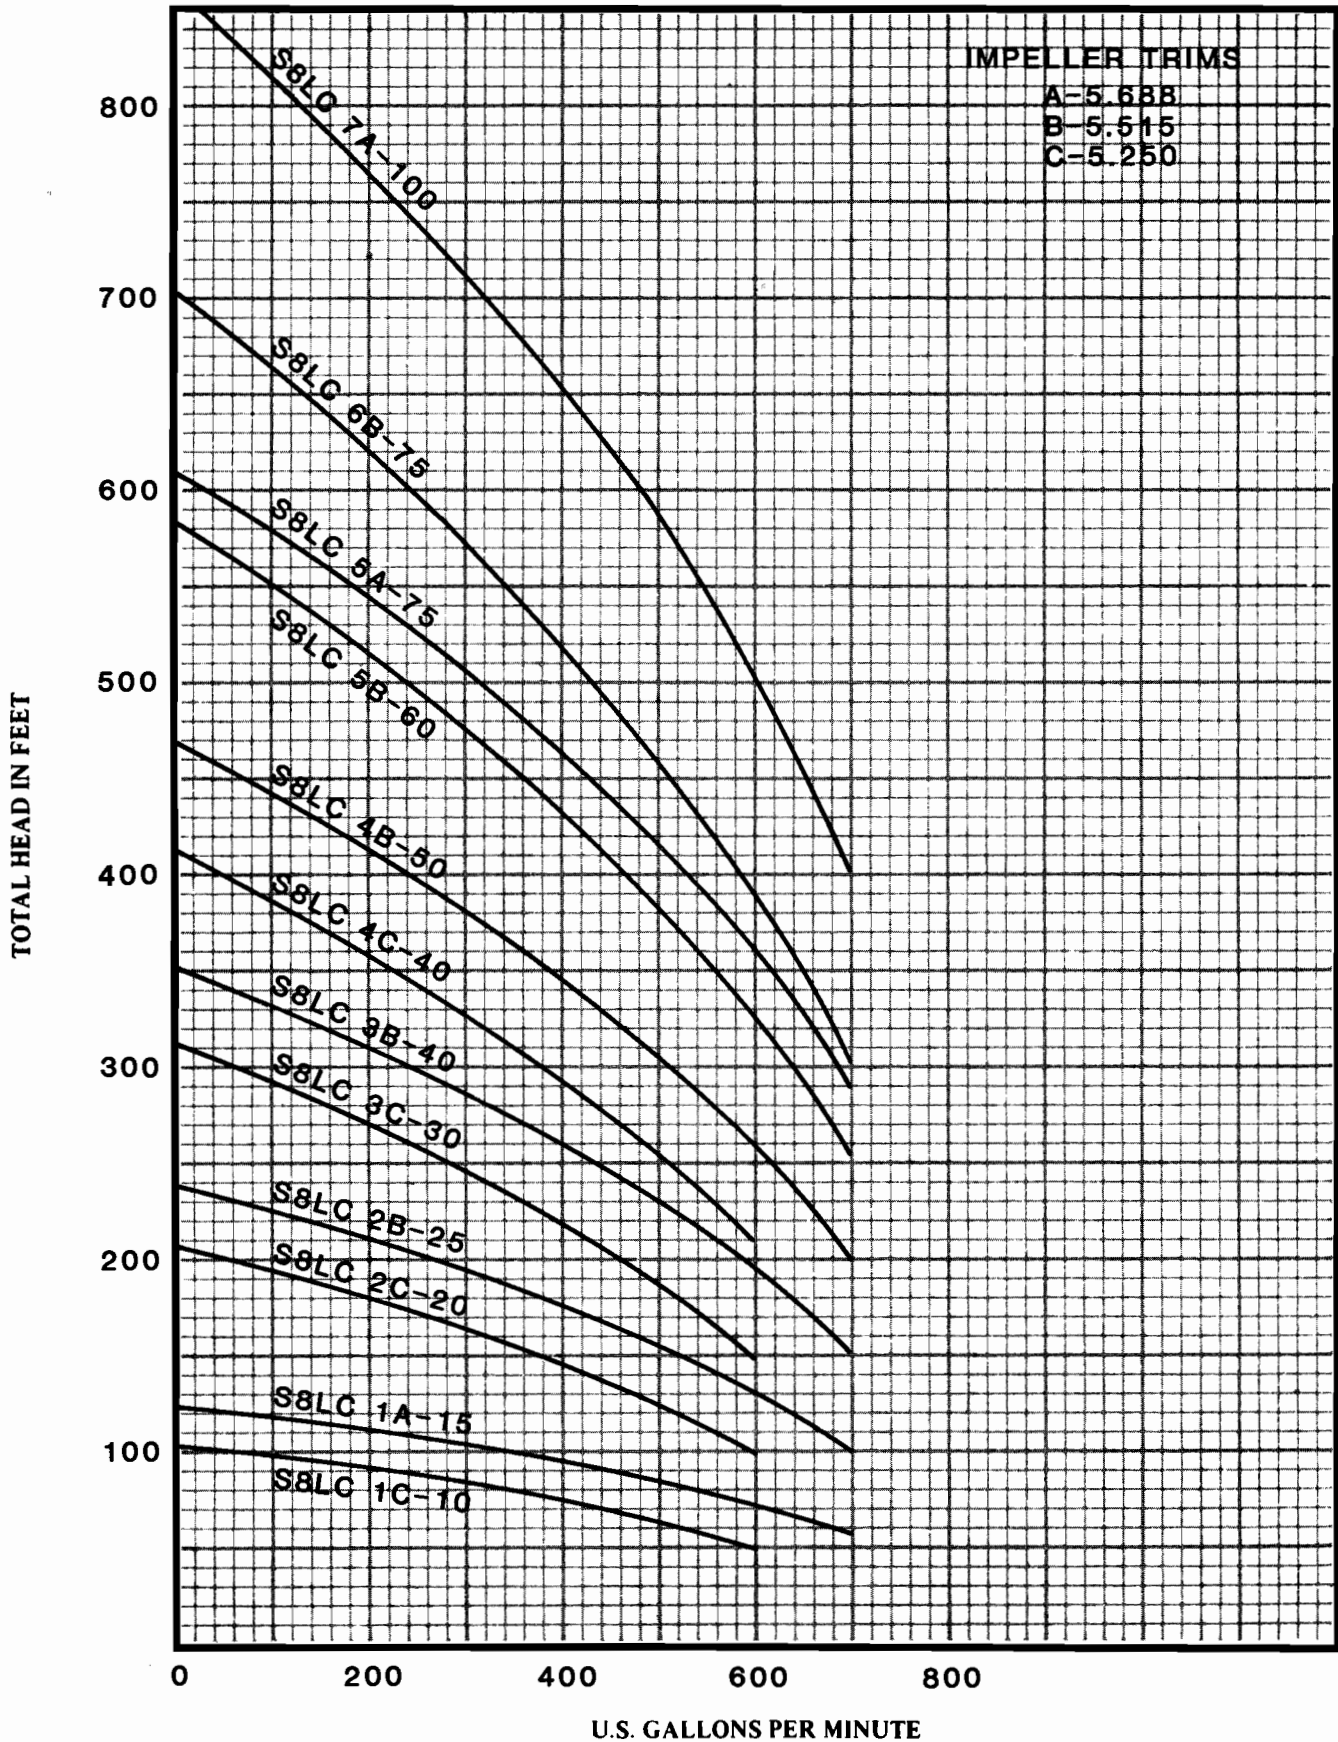

SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

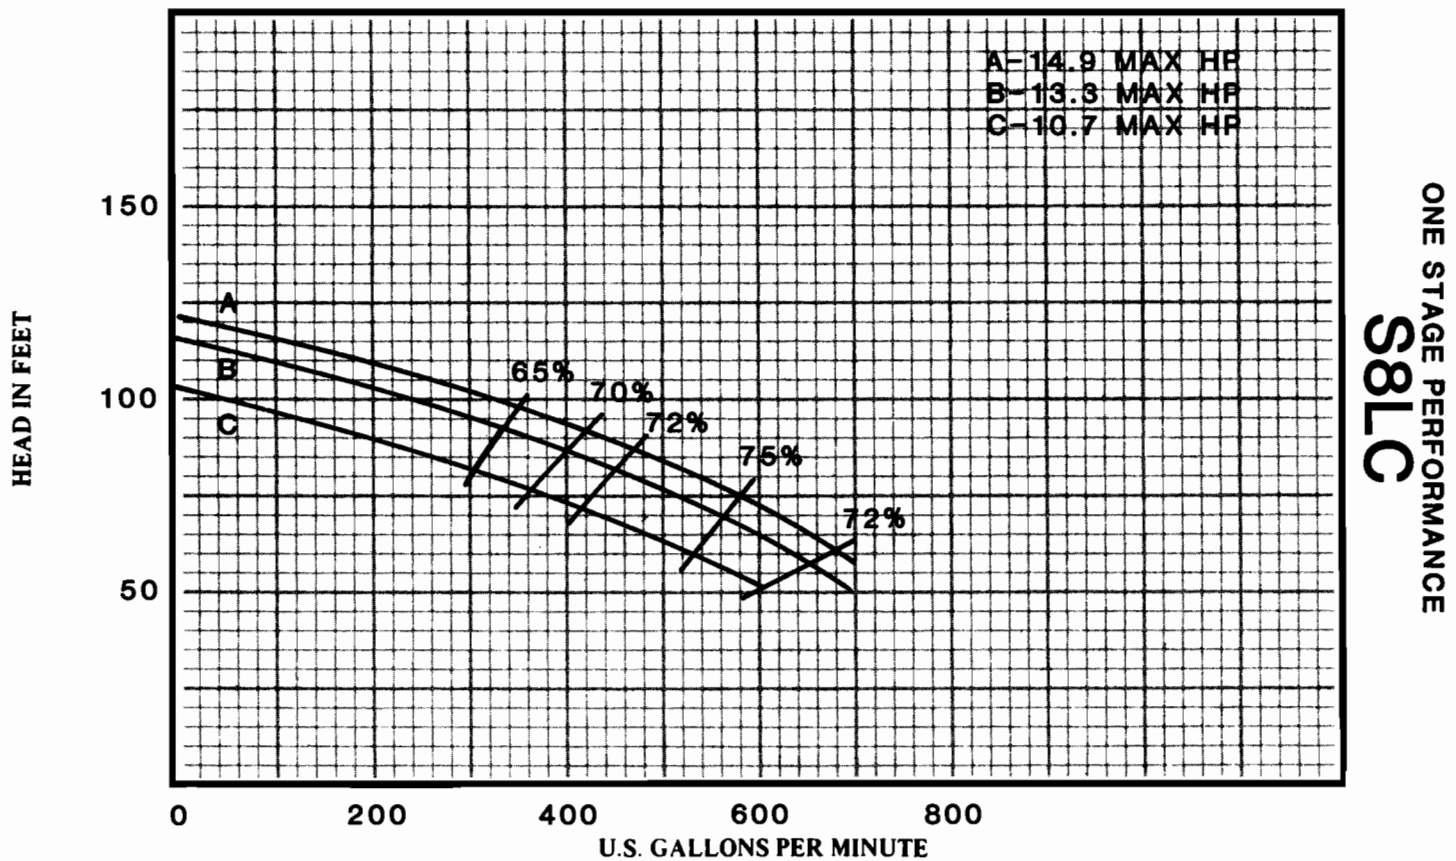

DIMENSIONS & SPECIFICATIONS

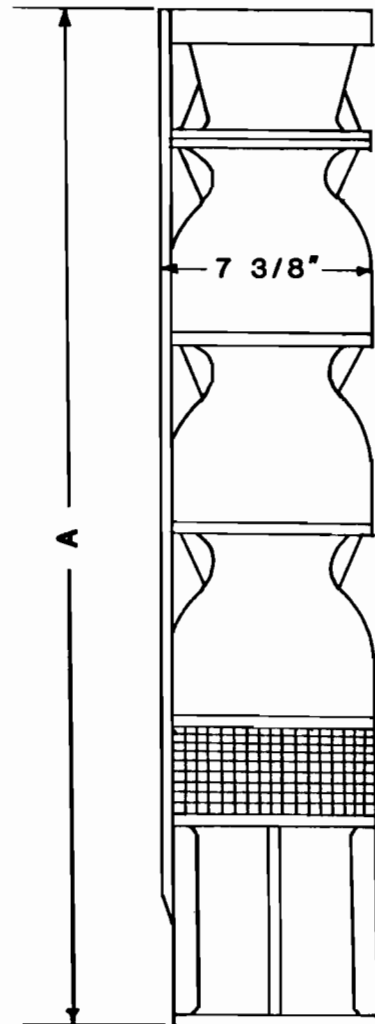

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S8LC 1C-10	1	10	27.75	115
S8LC 1A-15	1	15	27.75	115
S8LC 2C-20	2	20	34.50	150
S8LC 2B-25	2	25	34.50	150
S8LC 3C-30	3	30	41.25	185
S8LC 3B-40	3	40	41.25	185
S8LC 4C-40	4	40	48.00	220
S8LC 4B-50	4	50	48.00	220
S8LC 5B-60	5	60	54.75	255
S8LC 5A-75	5	75	54.75	255
S8LC 6B-75	6	75	61.50	290
S8LC 7A-100	7	100	68.25	325

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL