

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA


SECTION - D-S
PAGE - 4
APR. 1, 1982

S8XHC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

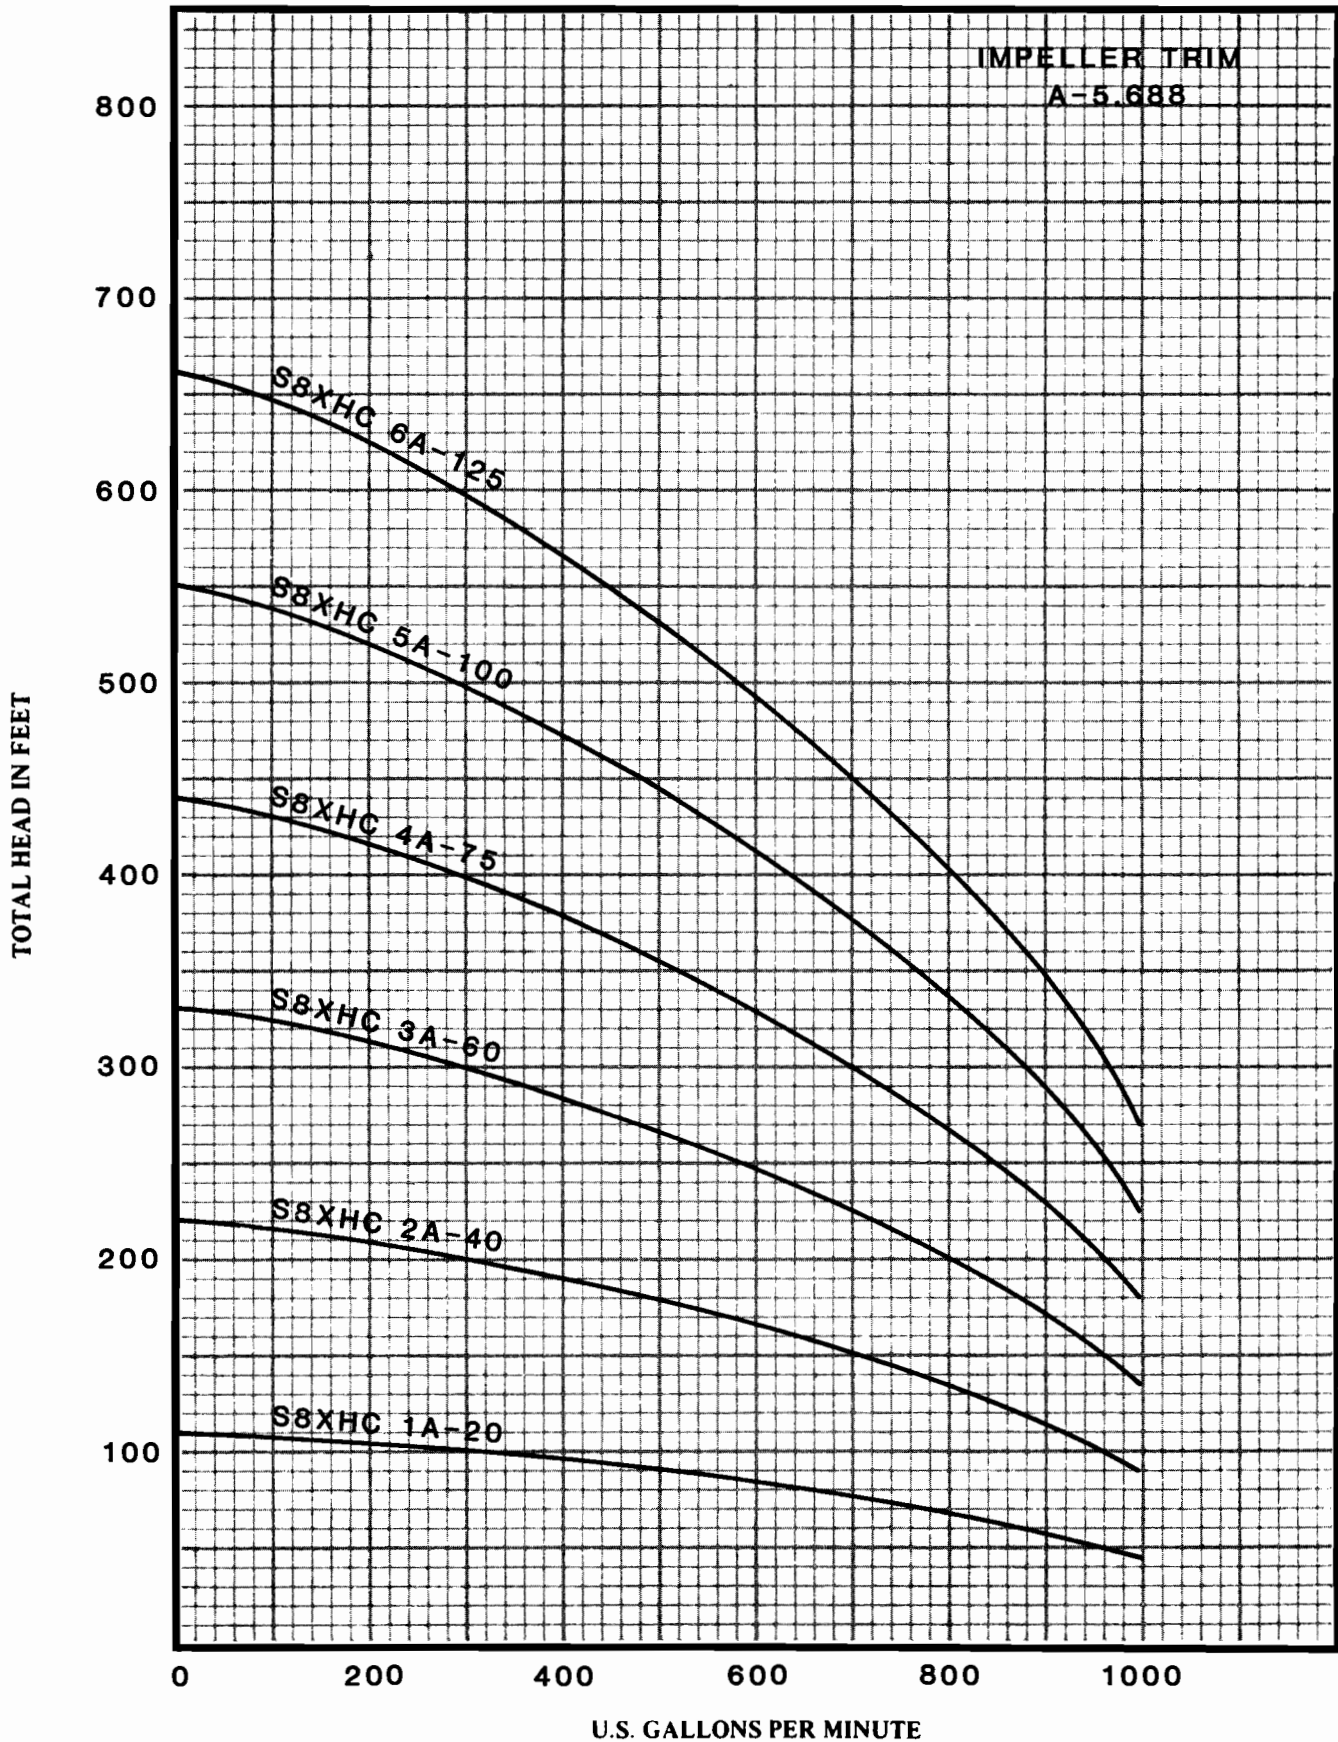

**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

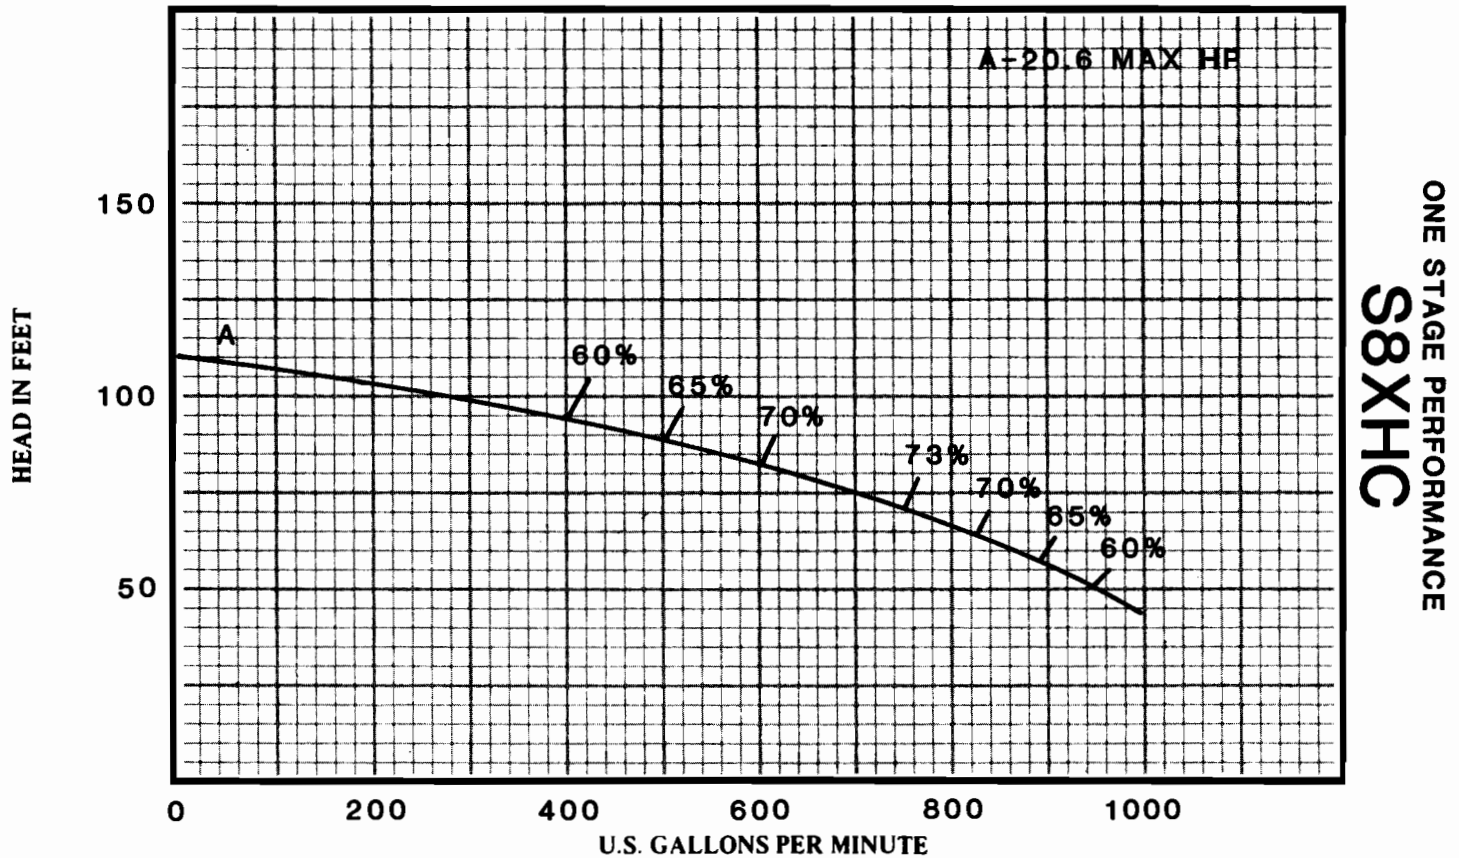

DIMENSIONS & SPECIFICATIONS

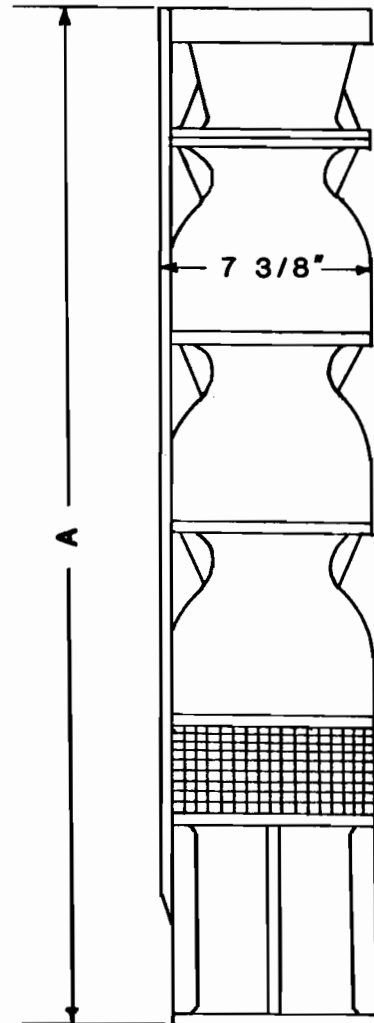

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S8XHC 1A-20	1	20	27.75	115
S8XHC 2A-40	2	40	34.50	150
S8XHC 3A-60	3	60	41.25	185
S8XHC 4A-75	4	75	48.00	220
S8XHC 5A-100	5	100	54.75	255
S8XHC 6A-125	6	125	61.50	290

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL