

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA

SECTION - D-S
PAGE - 1
APR. 1, 1982


S8XLC

SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

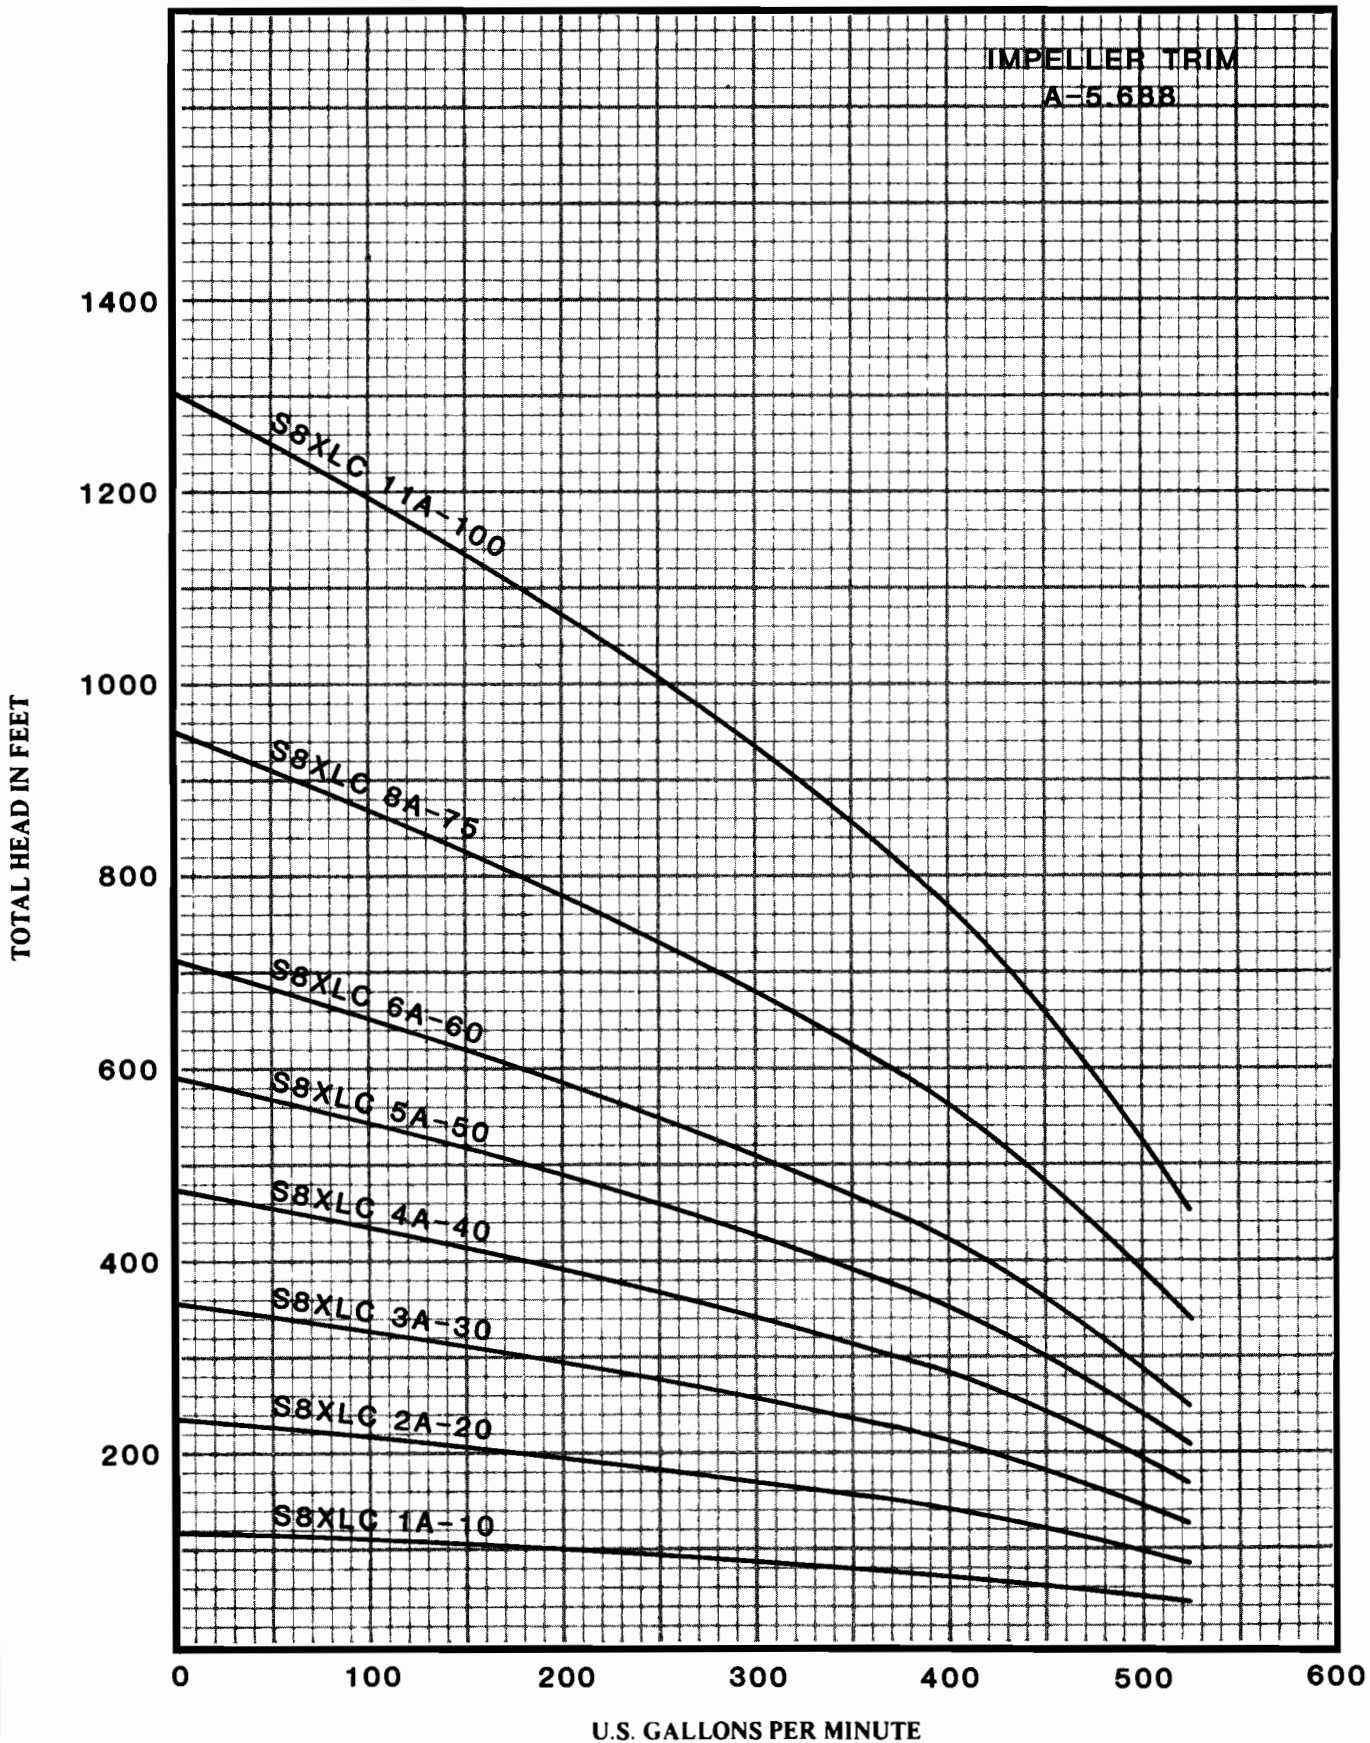

**SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.**

**ONE STAGE PERFORMANCE
S8XLC**

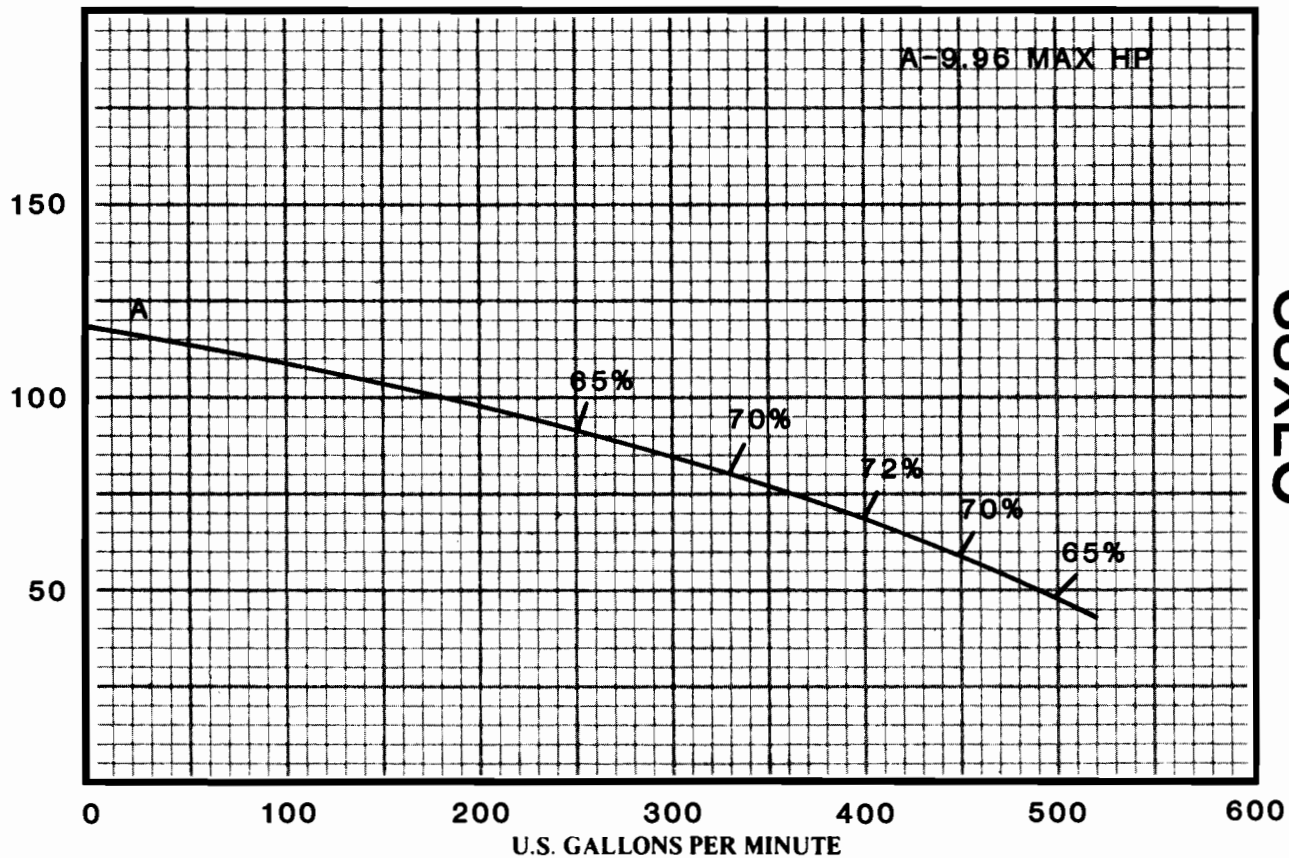

DIMENSIONS & SPECIFICATIONS

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S8XLC 1A-10	1	10	27.75	115
S8XLC 2A-20	2	20	34.50	150
S8XLC 3A-30	3	30	41.25	185
S8XLC 4A-40	4	40	48.00	220
S8XLC 5A-50	5	50	54.75	255
S8XLC 6A-60	6	60	61.50	290
S8XLC 8A-75	8	75	75.00	360
S8XLC 11A-100	11	100	95.25	465

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL

