

PERFORMANCE BASED ON  
PUMPING CLEAR, FRESH  
NON-AERATED WATER AT  
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA


SECTION - E-S  
PAGE - 2  
APR. 1, 1982

S9MC

**SUBMERSIBLE PUMP PERFORMANCE  
3450 R.P.M.**

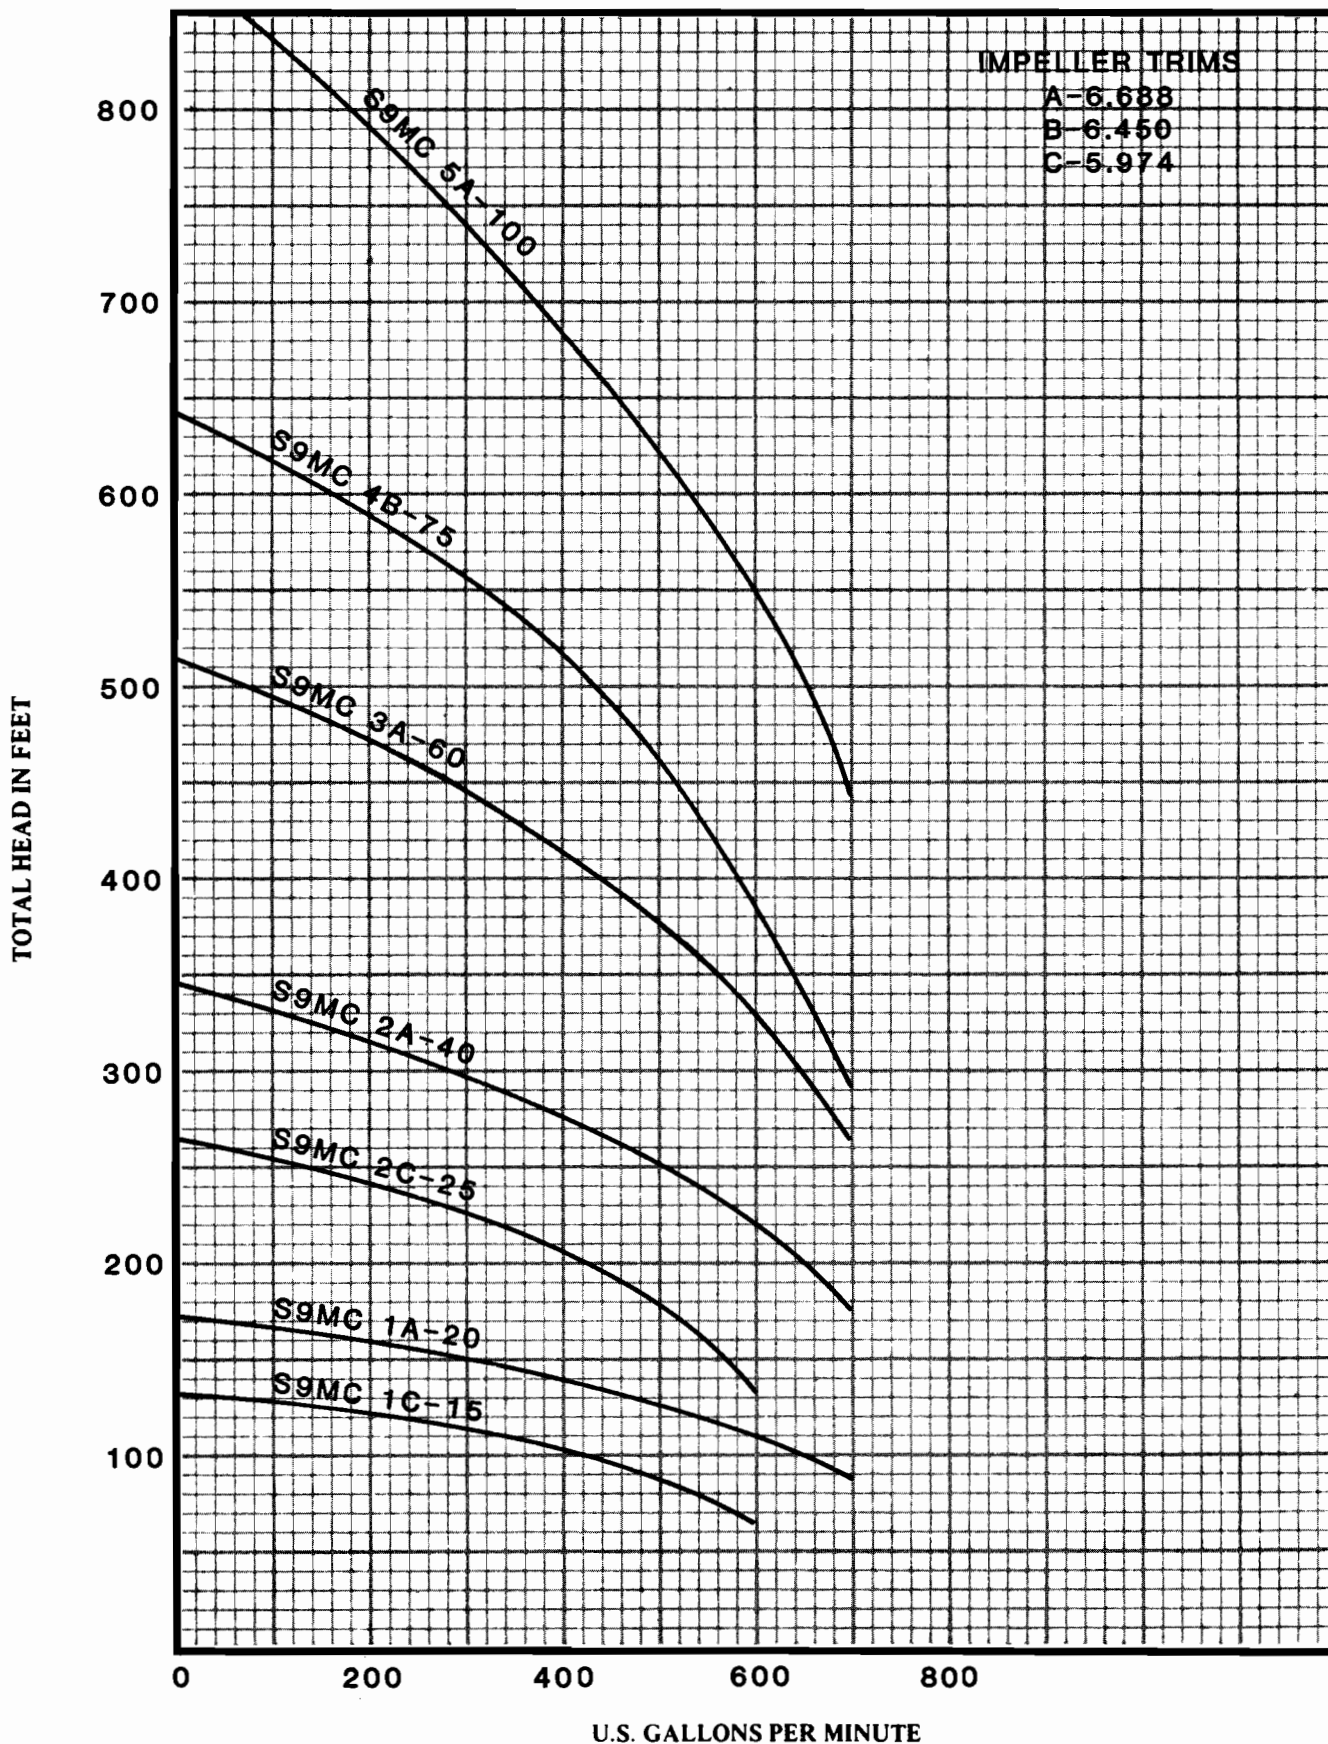


# SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

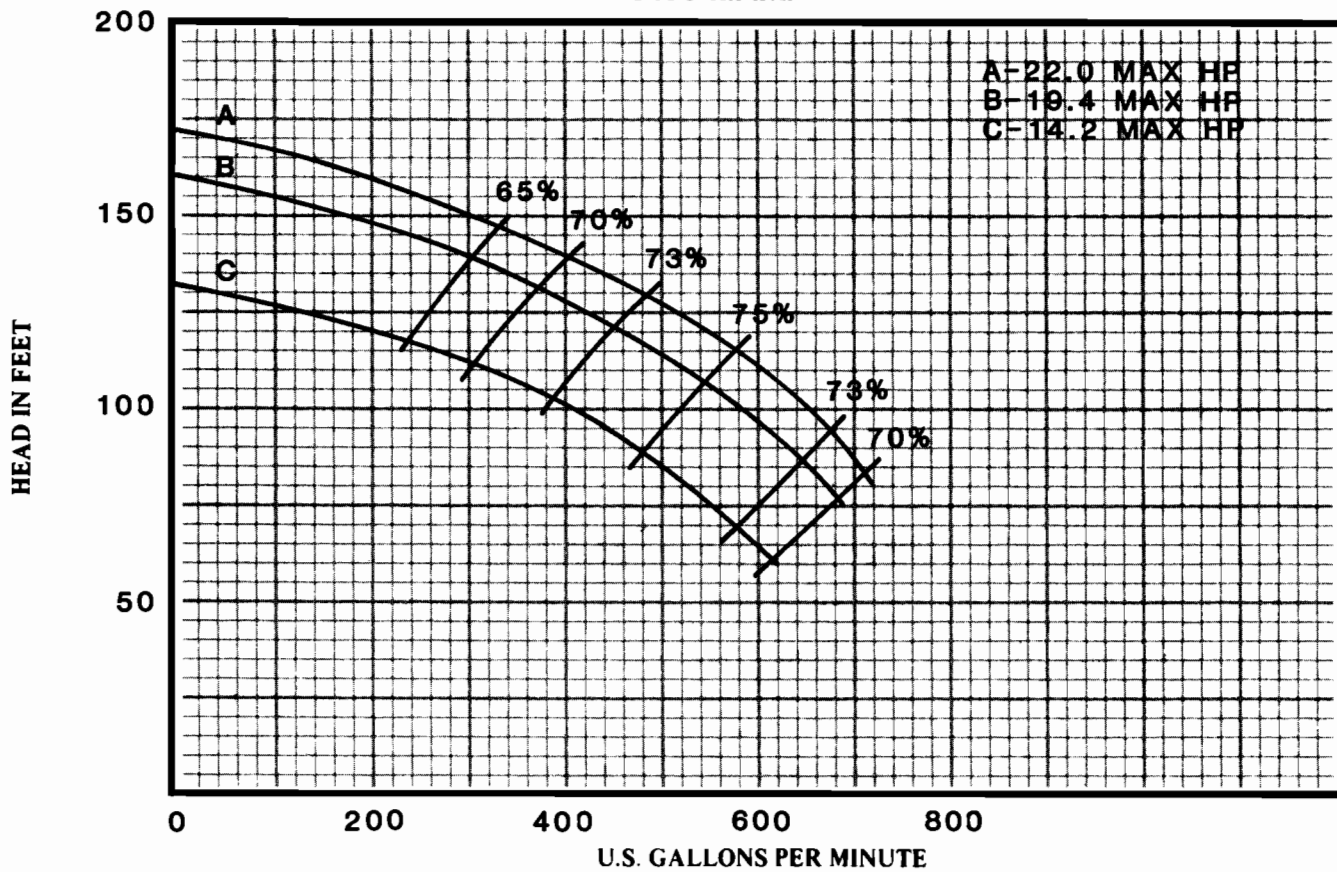

ONE STAGE PERFORMANCE  
**S9MC**

## DIMENSIONS & SPECIFICATIONS

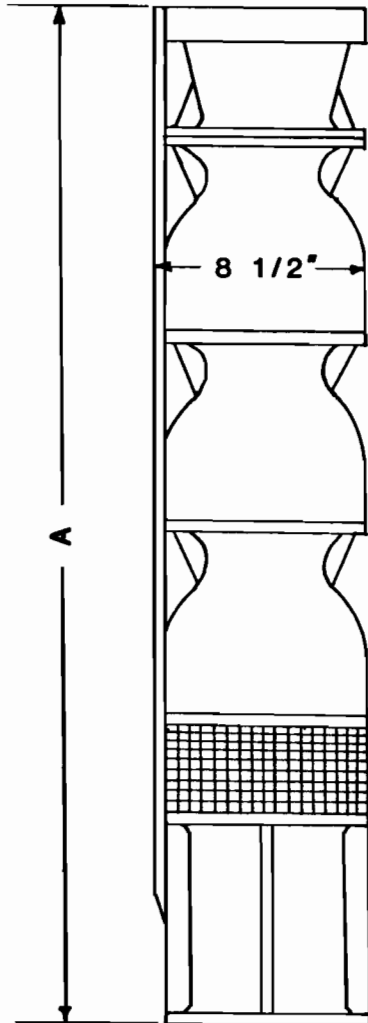

| Model Number | Stages | HP  | "A" Length<br>Inches * | Approx.<br>Shipping Wgt.<br>lbs. |
|--------------|--------|-----|------------------------|----------------------------------|
| S9MC 1C-15   | 1      | 15  | 27.50                  | 130                              |
| S9MC 1A-20   | 1      | 20  | 27.50                  | 130                              |
| S9MC 2C-25   | 2      | 25  | 34.75                  | 170                              |
| S9MC 2A-40   | 2      | 40  | 34.75                  | 170                              |
| S9MC 3A-60   | 3      | 60  | 42.00                  | 210                              |
| S9MC 4B-75   | 4      | 75  | 49.25                  | 250                              |
| S9MC 5A-100  | 5      | 100 | 56.50                  | 290                              |

## MATERIALS OF CONSTRUCTION

| DESCRIPTION | MATERIAL        | DESCRIPTION   | MATERIAL        |
|-------------|-----------------|---------------|-----------------|
| BOWL        | CAST IRON       | THRUST. ASSY. | BRONZE          |
| IMPELLER    | BRONZE          | BOLTS         | GRADE 5 STEEL   |
| SHAFT       | STAINLESS STEEL | SCREEN        | STAINLESS STEEL |
| BEARING     | BRONZE          | CABLE GUARD   | STAINLESS STEEL |