

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDALE, ARIZONA


SECTION - E-S
PAGE - 3
APR. 1, 1982

S9XHC


SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

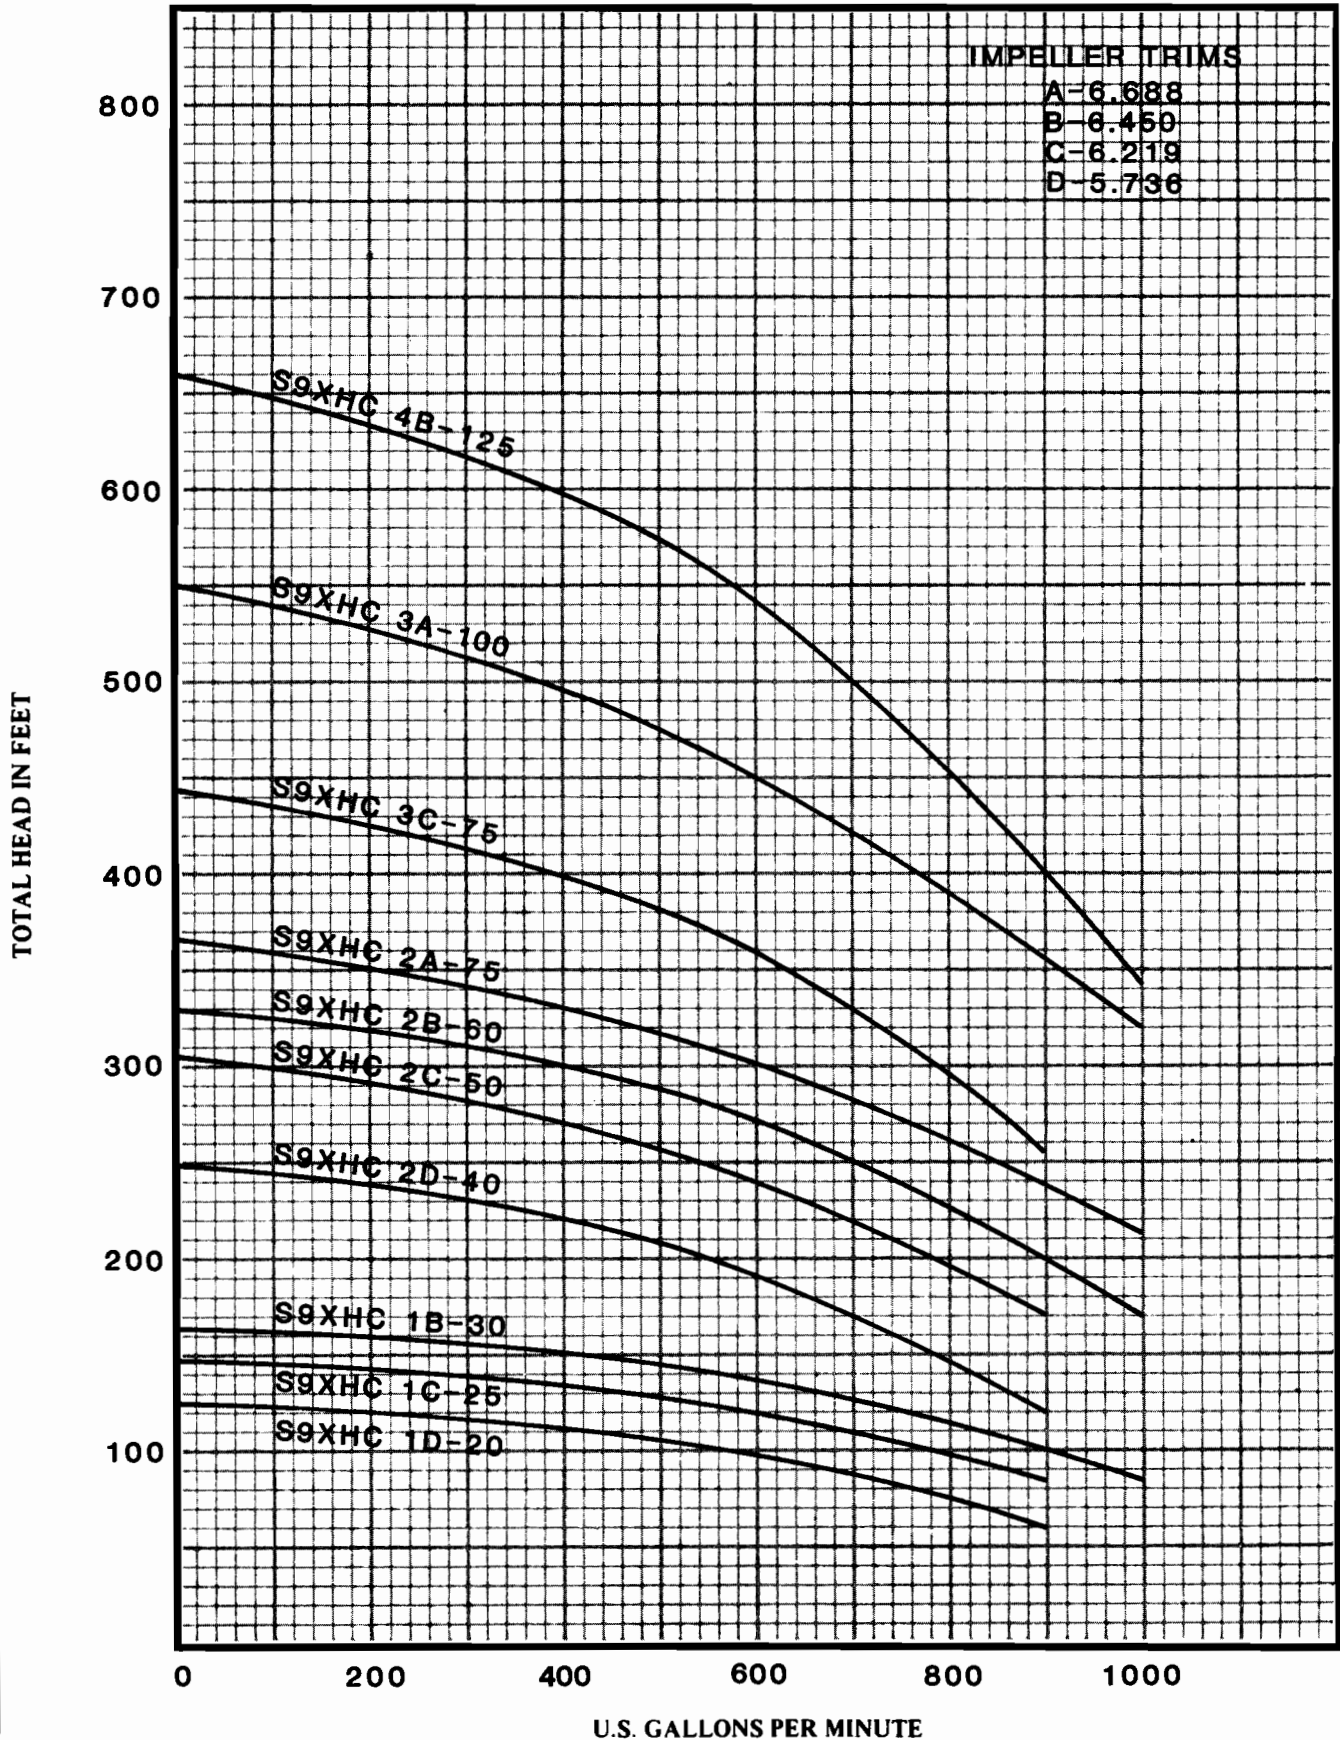

SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

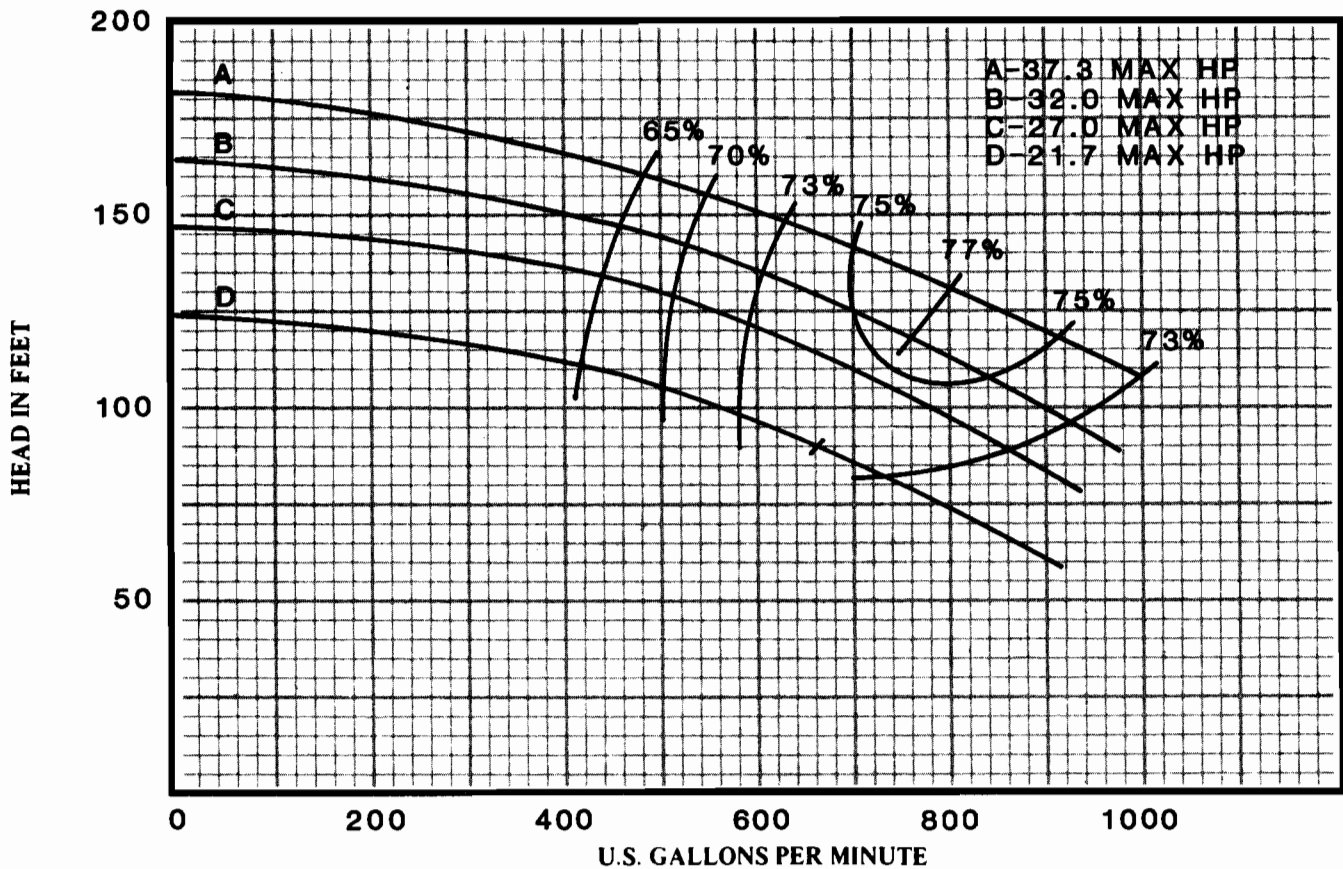

DIMENSIONS & SPECIFICATIONS

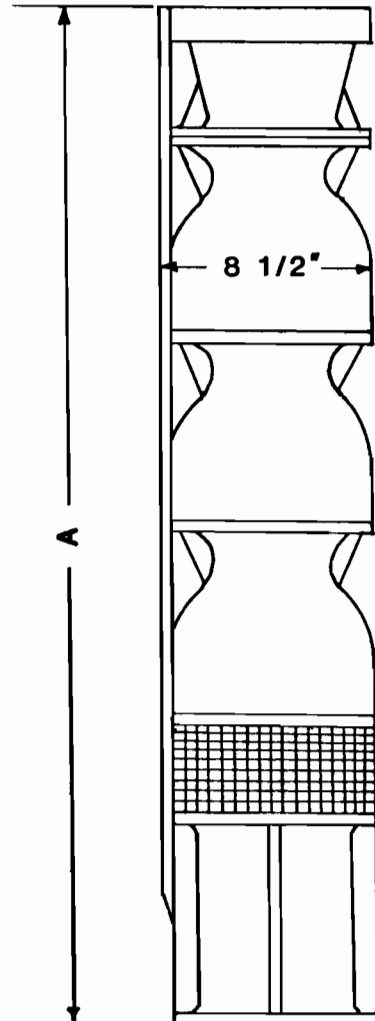

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S9XHC 1D-20	1	20	27.50	130
S9XHC 1C-25	1	25	27.50	130
S9XHC 1B-30	1	30	27.50	130
S9XHC 2D-40	2	40	34.75	170
S9XHC 2C-50	2	50	34.75	170
S9XHC 2B-60	2	60	34.75	170
S9XHC 2A-75	2	75	34.75	170
S9XHC 3C-75	3	75	42.00	210
S9XHC 3A-100	3	100	42.00	210
S9XHC 4B-125	4	125	49.25	250

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL