

PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85 DEGREES F TEMPERATURE.




GLENDAL, ARIZONA


SECTION - E-S
PAGE - 1
APR. 1, 1982

S9XLC

SUBMERSIBLE PUMP PERFORMANCE
3450 R.P.M.

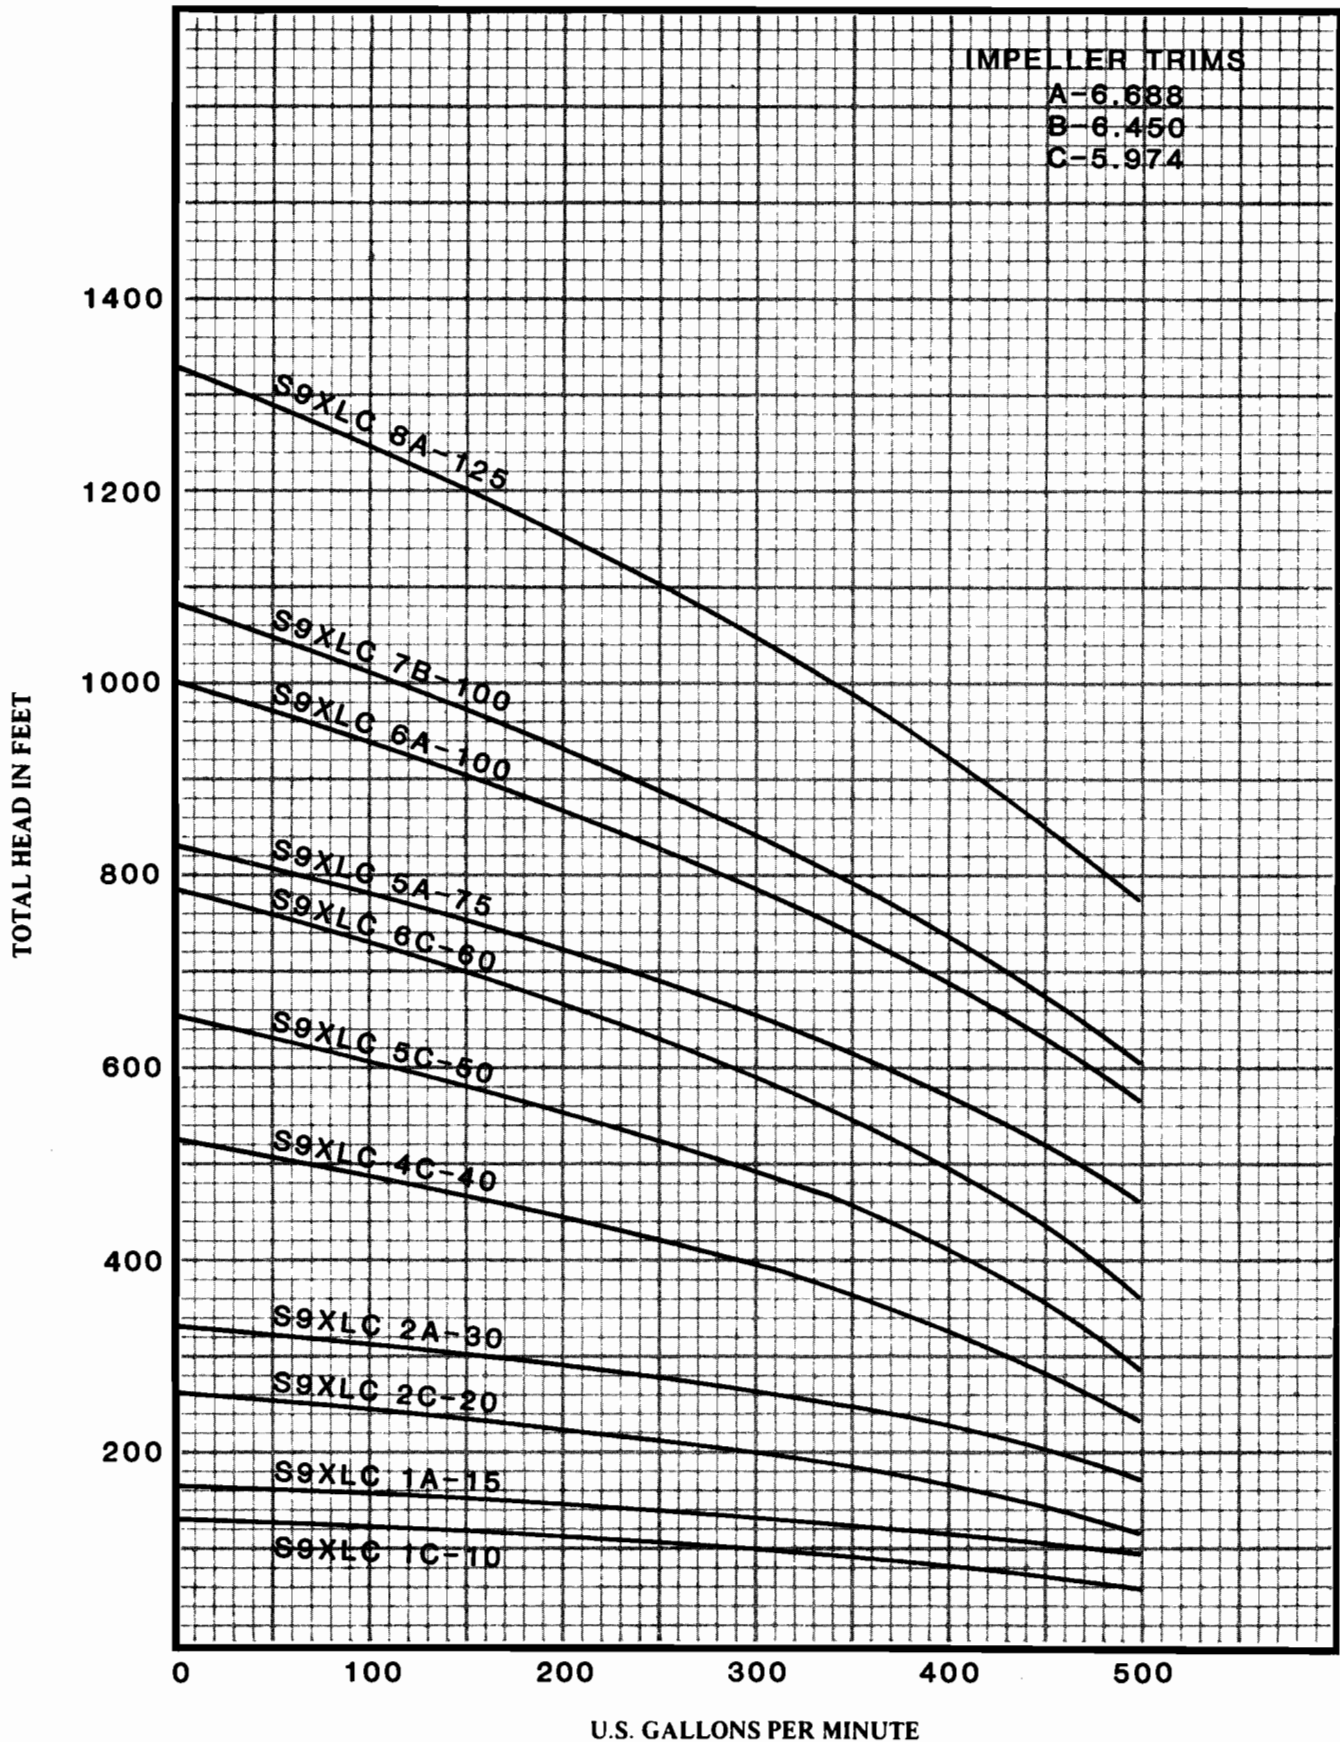


SUBMERSIBLE PUMP PERFORMANCE 3450 R.P.M.

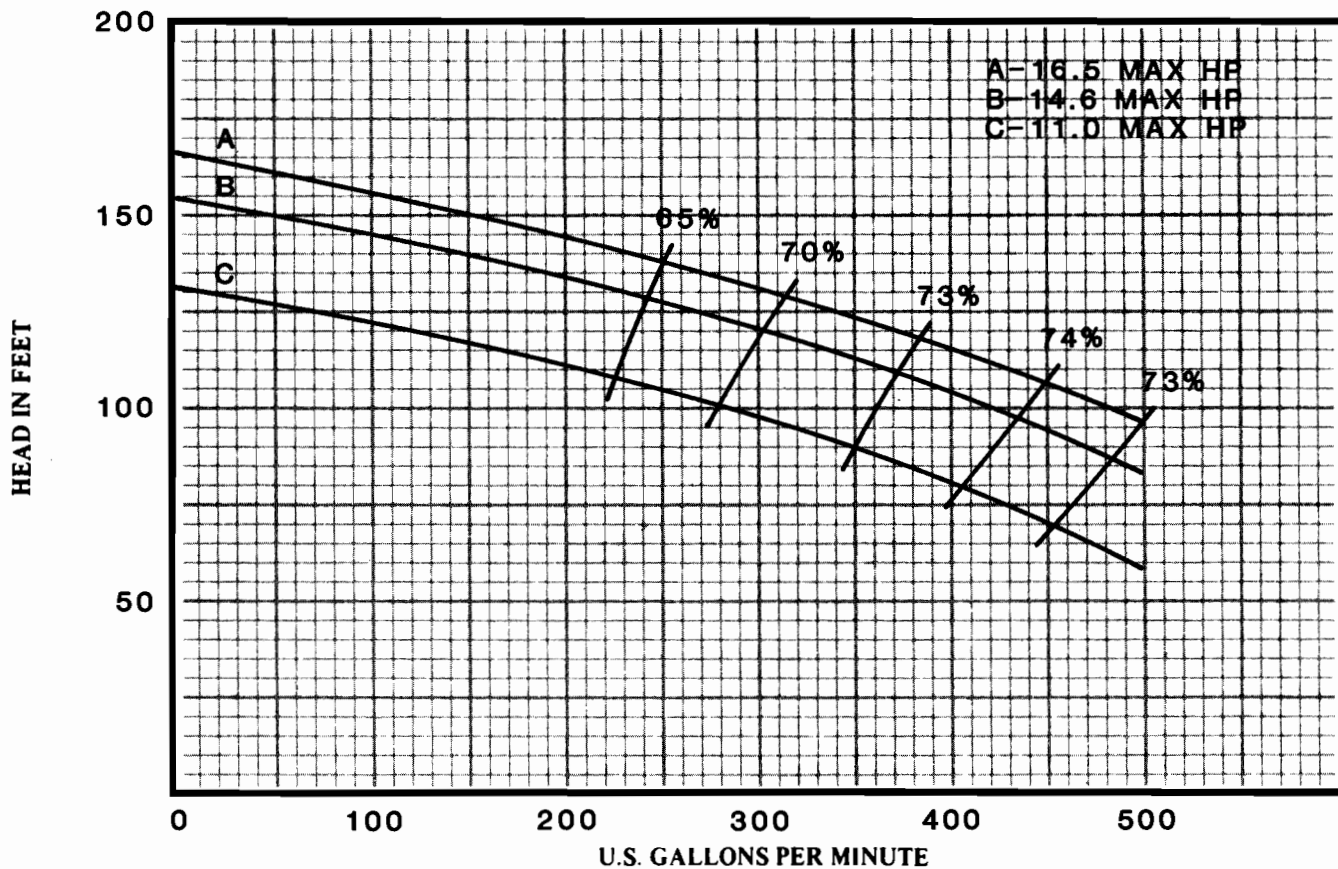

ONE STAGE PERFORMANCE
S9XLC

DIMENSIONS & SPECIFICATIONS

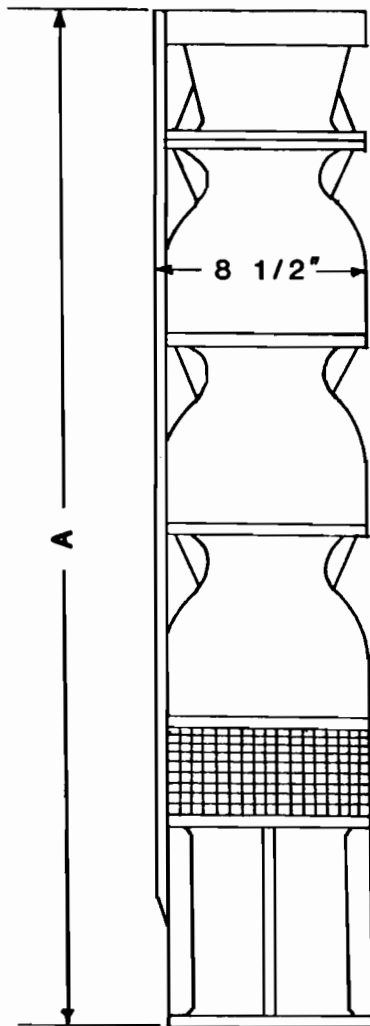

Model Number	Stages	HP	"A" Length Inches *	Approx. Shipping Wgt. lbs.
S9XLC 1C-10	1	10	27.50	130
S9XLC 1A-15	1	15	27.50	130
S9XLC 2C-20	2	20	34.75	170
S9XLC 2A-30	2	30	34.75	170
S9XLC 4C-40	4	40	49.25	250
S9XLC 5C-50	5	50	56.50	290
S9XLC 6C-60	6	60	63.75	330
S9XLC 5A-75	5	75	56.50	290
S9XLC 6A-100	6	100	63.75	330
S9XLC 7B-100	7	100	71.00	370
S9XLC 8A-125	8	125	78.25	410

MATERIALS OF CONSTRUCTION

DESCRIPTION	MATERIAL	DESCRIPTION	MATERIAL
BOWL	CAST IRON	THRUST. ASSY.	BRONZE
IMPELLER	BRONZE	BOLTS	GRADE 5 STEEL
SHAFT	STAINLESS STEEL	SCREEN	STAINLESS STEEL
BEARING	BRONZE	CABLE GUARD	STAINLESS STEEL