

April 7, 1955


CURVE NO. 10M6AD-1

Supersedes 10M4AD-2

DEVELOPMENT PROJECT MF 6

TEST SERIES 4147 & 4267

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	PER NUMBER OF STAGES
LOWER	3	1
"	1	2
NOTE: ANY CHANGE IN EFFICIENCY CHANGES EITHER THE HEAD OR HORSE POWER IN PROPORTION.		

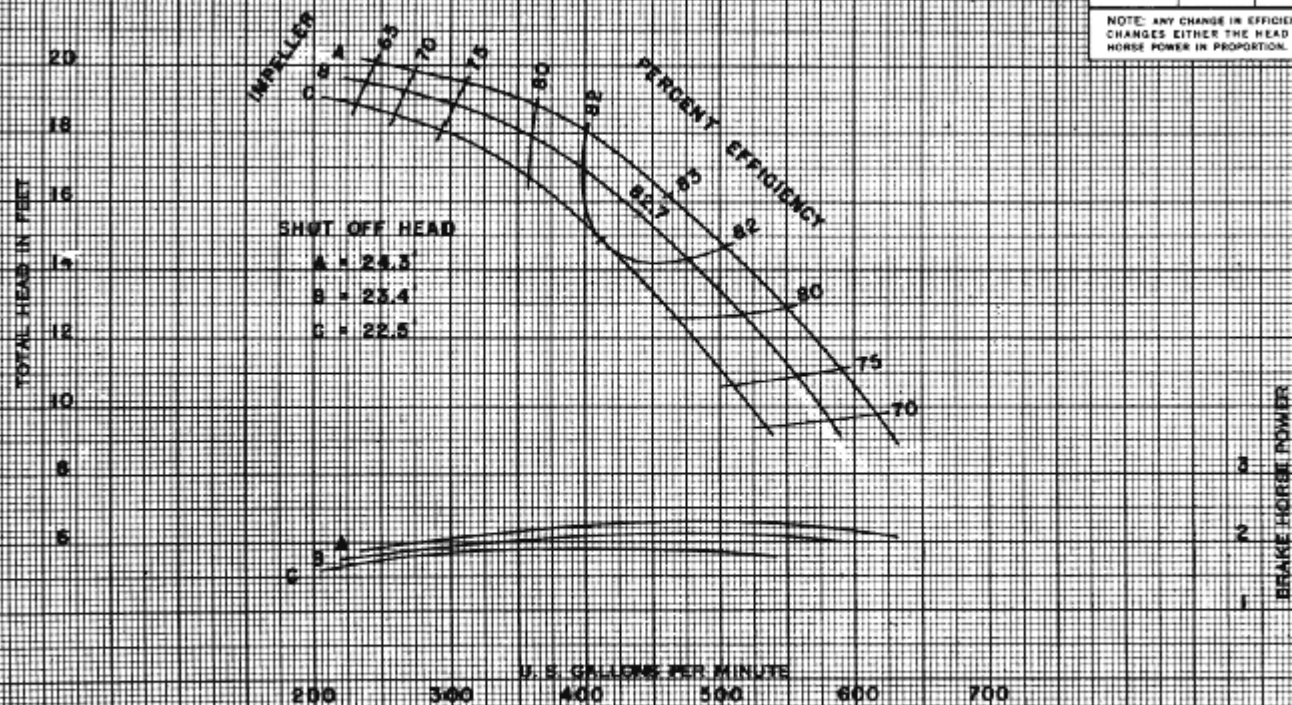

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

FAIRBANKS, MORSE & CO.
POMONA WORKS
POMONA • CALIFORNIA

LABORATORY PERFORMANCE PE
PER STAGE 10" MC DEEP WELL TURBINE
PUMP OPERATED AT 1160 R. P. M.
FIELD LOSS MUST BE DEDUCTED
1-15-55