


CURVE NO. 12L3AD-2

Test No. 1333

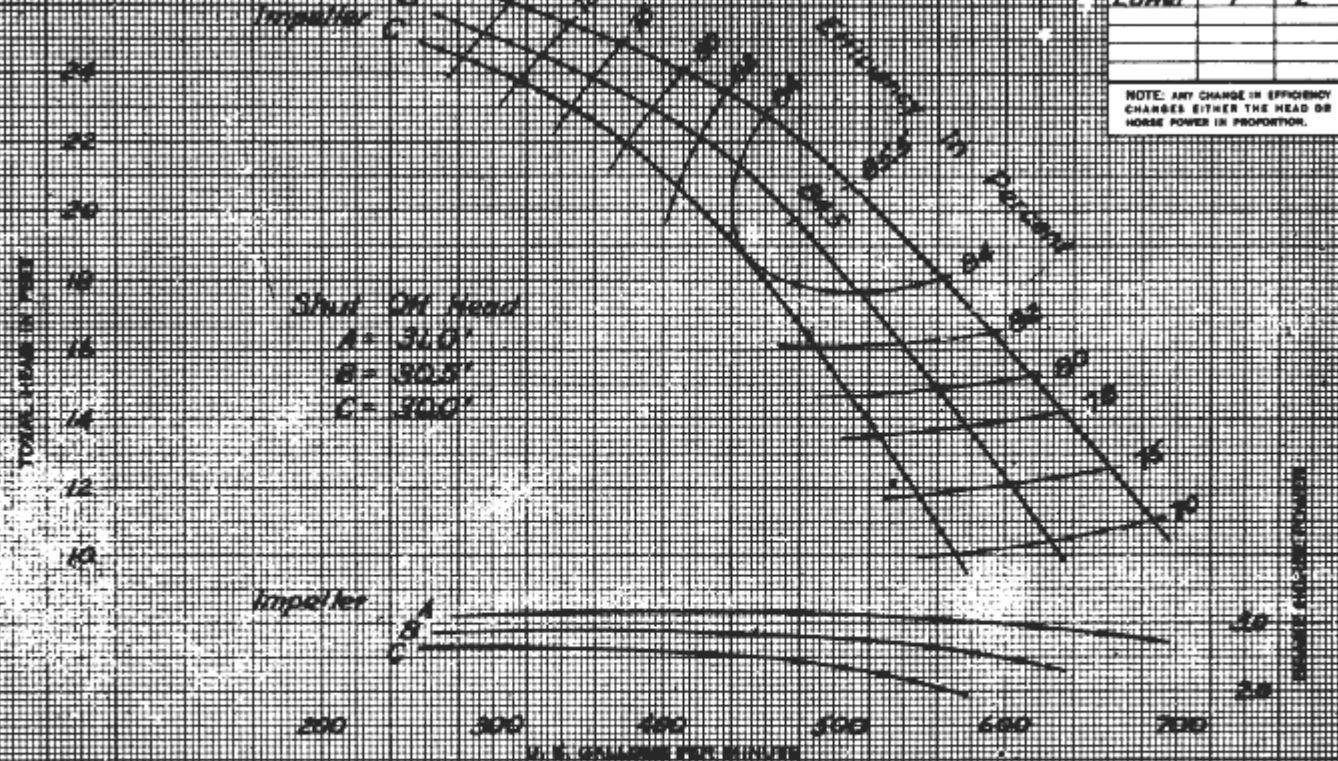

| SHUT OFF<br>EFFICIENCY<br>AS FOLLOWS | NUMBER<br>OF<br>STAGES | PER<br>STAGE<br>HEAD |
|--------------------------------------|------------------------|----------------------|
| LOWRI                                | 5                      | 1                    |
| LOWRI                                | 7                      | 2                    |
|                                      |                        |                      |
|                                      |                        |                      |
|                                      |                        |                      |

NOTE: ANY CHANGE IN EFFICIENCY  
CHANGES EITHER THE HEAD OR  
HORSE POWER IN PROPORTION.

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

**POMONA PUMPS**  
**Fairbanks, Morse & Co.**

Chicago 5,  
Illinois

Pomona  
California

LABORATORY PERFORMANCE **PE**  
PER STAGE **12LC** DEEP WELL TURBINE  
PUMP OPERATED AT **1160** R. P. M.  
FIELD LOSS MUST BE DEDUCTED