


CURVE NO. 24M3AD-1

Test No. 1555

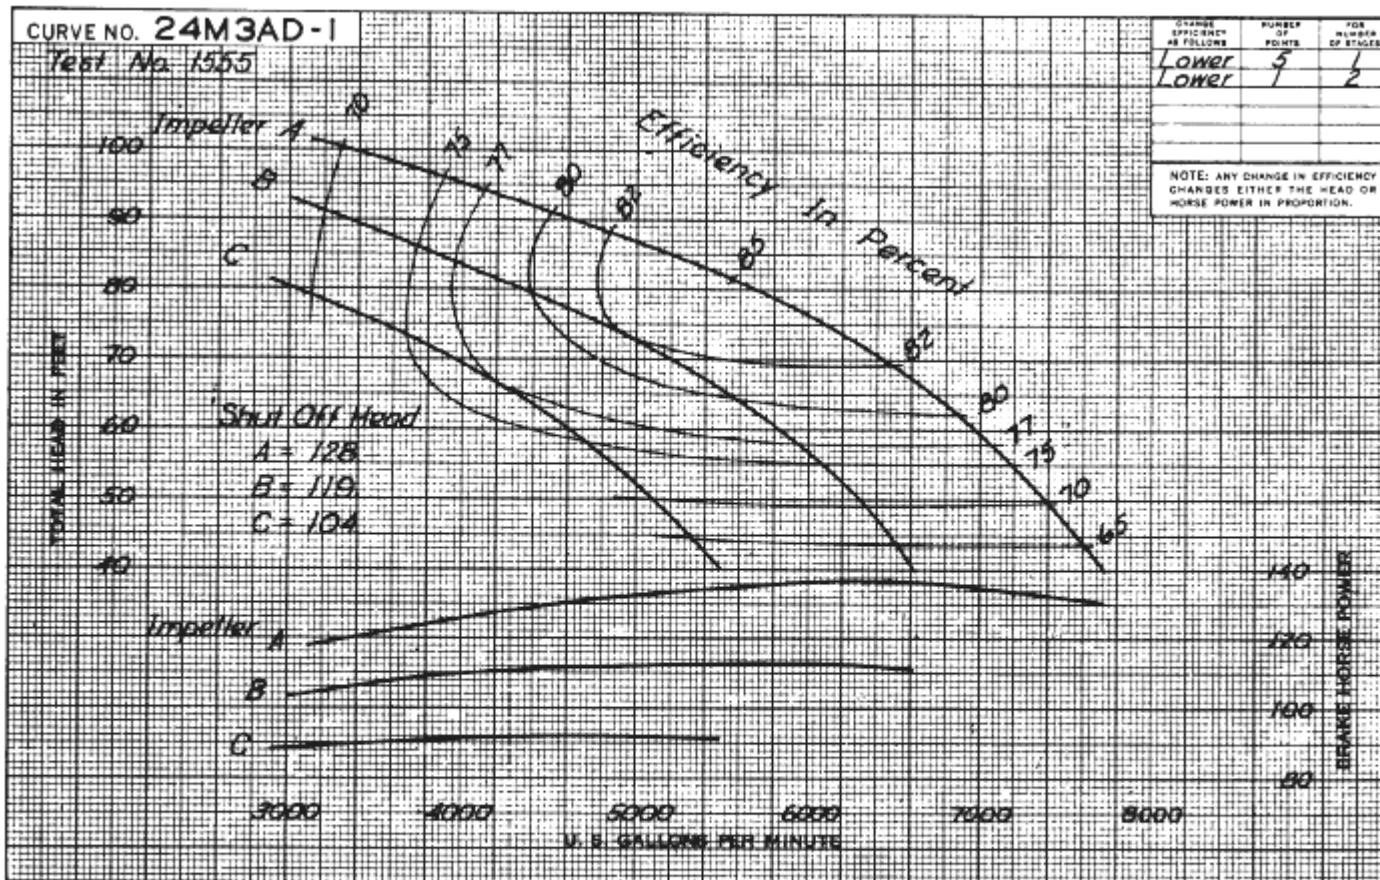

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

**POMONA PUMPS**  
Fairbanks, Morse & Co.

Chicago 5,  
Illinois


Pomona  
California

LABORATORY PERFORMANCE  
PER STAGE 24 MC. DEEP WELL TURBINE  
PUMP OPERATED AT 1160 R. P. M.  
FIELD LOSS MUST BE DEDUCTED

CURVE NO. 24M3AD-2  
TEST No. 1513, 1543

| CHANGE<br>EFFICIENCY<br>AS FOLLOWS | NUMBER<br>OF<br>POINTS | FOR<br>NUMBER<br>OF STAGES |
|------------------------------------|------------------------|----------------------------|
| Lower                              | 5                      | 1                          |
| Lower                              | 1                      | 2                          |
|                                    |                        |                            |
|                                    |                        |                            |

NOTE: ANY CHANGE IN EFFICIENCY  
 CHANGES EITHER THE HEAD OR  
 HORSE POWER IN PROPORTION.

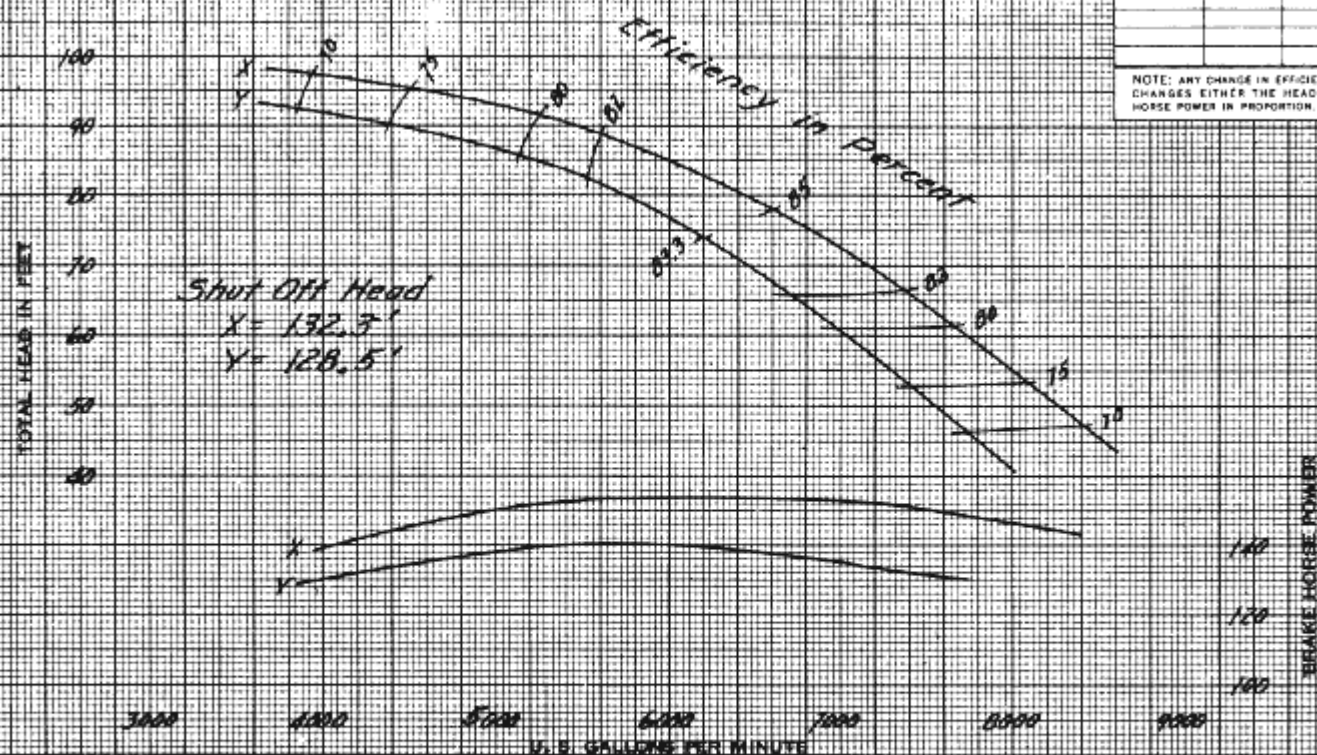

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

**POMONA PUMPS**  
**Fairbanks, Morse & Co.**  
 Chicago 5, Illinois  
 Pomona California

LABORATORY PERFORMANCE  
 PER STAGE 24 MC DEEP WELL TURBINE  
 PUMP OPERATED AT 1160 R. P. M.  
 FIELD LOSS MUST BE DEDUCTED