


June 10, 1955

NEW PAGE

CURVE NO. 8L3AL-1

DEV. PROJ. MFS TEST NO. 3671

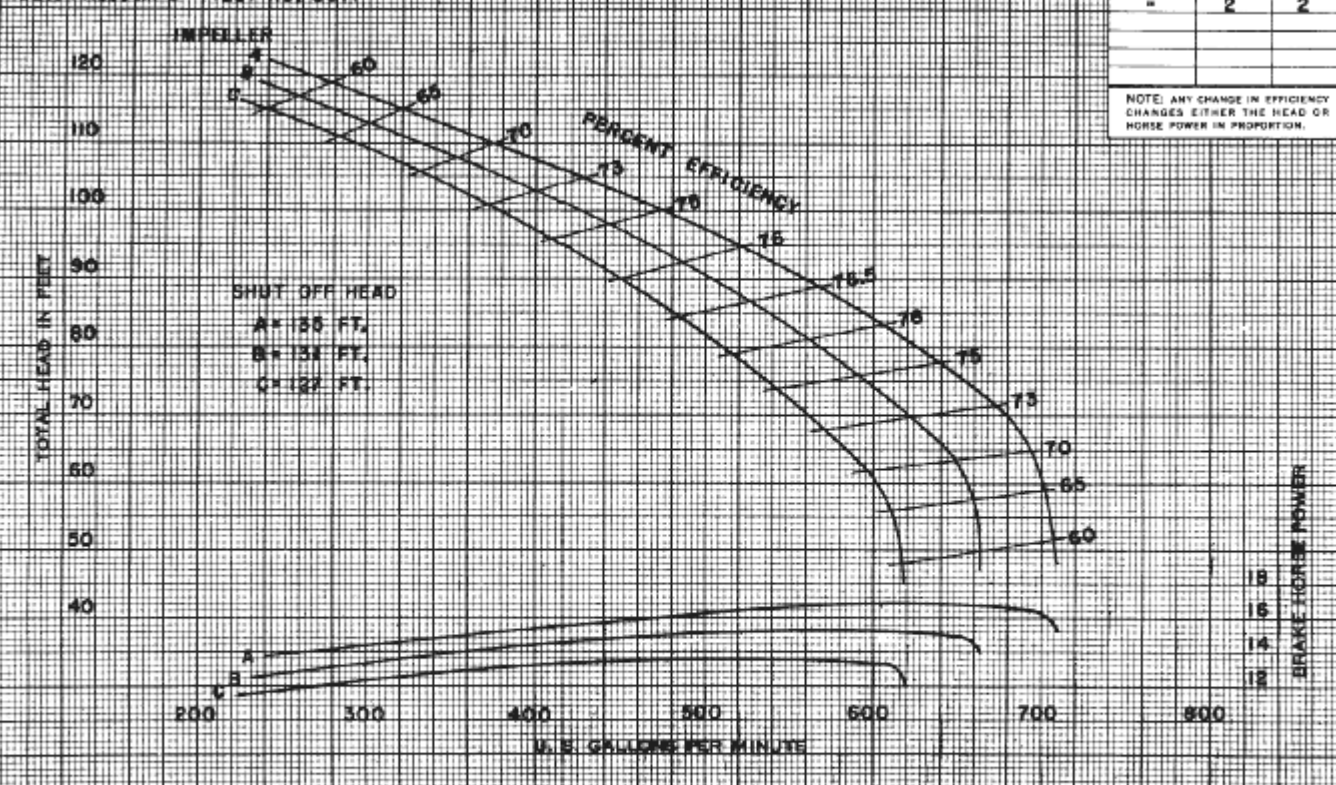

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	5	1
"	2	2
"		
"		
"		

NOTE: ANY CHANGE IN EFFICIENCY
CHANGES EITHER THE HEAD OR
HORSE POWER IN PROPORTION.

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

POMONA PUMPS
Fairbanks, Morse & Co.

Chicago 5,
Illinois

Pomona
California

LABORATORY PERFORMANCE PE
PER STAGE 8" LC DEEP WELL TURBINE
PUMP OPERATED AT 3500 R. P. M.
FIELD LOSS MUST BE DEDUCTED

PRINTED IN U.S.A.