


CURVE NO. 20M3AB-1
7251 No. 1280-1 & 1297

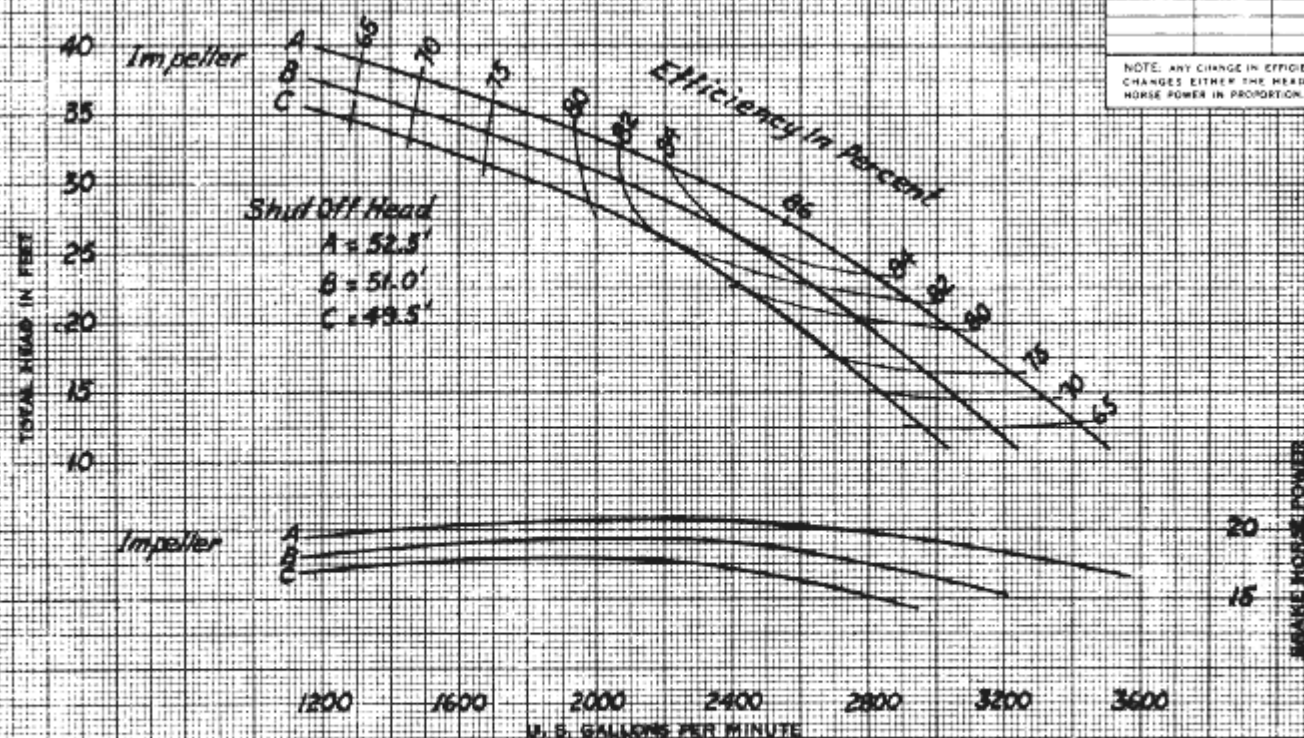

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	PER NUMBER OF STAGES
Lower	1	2
Lower	5	1

NOTE: ANY CHANGE IN EFFICIENCY
CHANGES EITHER THE HEAD OR
HORSE POWER IN PROPORTION.

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

POMONA PUMPS
Fairbanks, Morse & Co.

Chicago 5,
Illinois

Pomona
California

LABORATORY PERFORMANCE
PER STAGE 20" M.C. DEEP WELL TURBINE
PUMP OPERATED AT 860 R. P. M.
FIELD LOSS MUST BE DEDUCTED