



Clean water



Civil use



Agricultural use



Industrial use



PERFORMANCE RANGE

- Flow rate up to **900 l/min** (54 m³/h)
- Head up to **76 m**

INSTALLATION AND USE

Designed to transfer clean water free from abrasive particles and liquids that will not damage the pump's components.

Reliable and easy to operate, these pumps are widely used in civil, agricultural, and industrial settings for water supply, air conditioning and cooling systems, and irrigation purposes.

ELECTRIC MOTOR

Equipped with cutting-edge electric motors, the three-phase pumps are designed to work with inverters, offering stable and noiseless performance.

They feature efficiency class **IE3** for three-phase motors and **IE2** for single-phase motors, bolstered by class F insulation and IPX4 protection for model CP160, and IPX5 protection for models CP210, CP220, CP230, CP250.

APPLICATION LIMITS

- Manometric suction head up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Maximum working pressure **10 bar**

AVAILABLE UPON REQUEST

- ✘ Mechanical seal options available
- ✘ Pump shaft in stainless steel AISI 316 - EN 10088-3 - 1.4401 for CP 210, CP 220, CP 230, CP 250
- ✘ Protection rating IP X5 for CP 160
- ✘ Different voltage requirements 60 Hz frequency


PATENTS - TRADE MARKS - MODELS

- Registered community model No. 002098434 for CP 160, CP 210, CP 250
- Italian registered model no. 72753 for CP 220, CP 230


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

CP 160

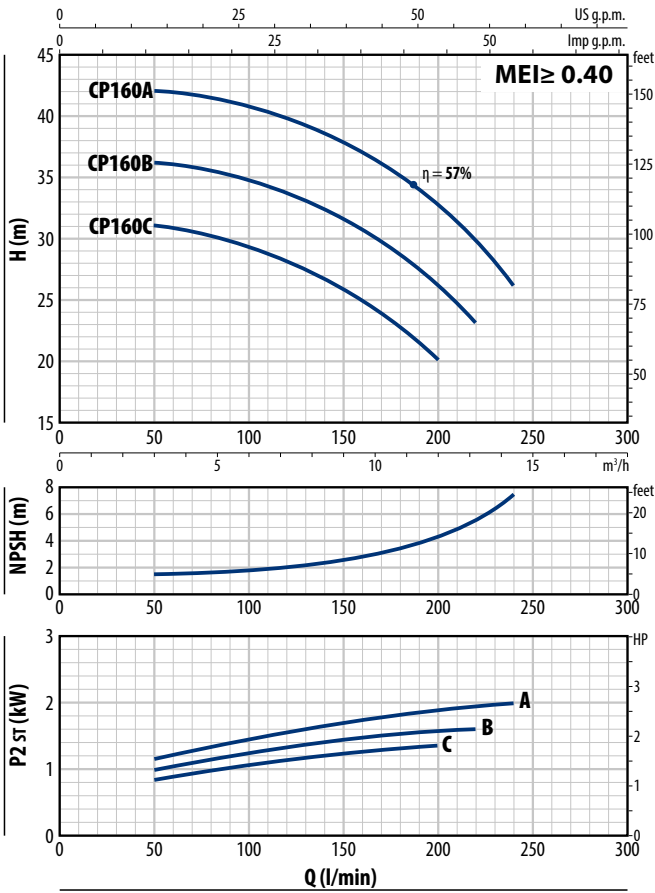

CP 210

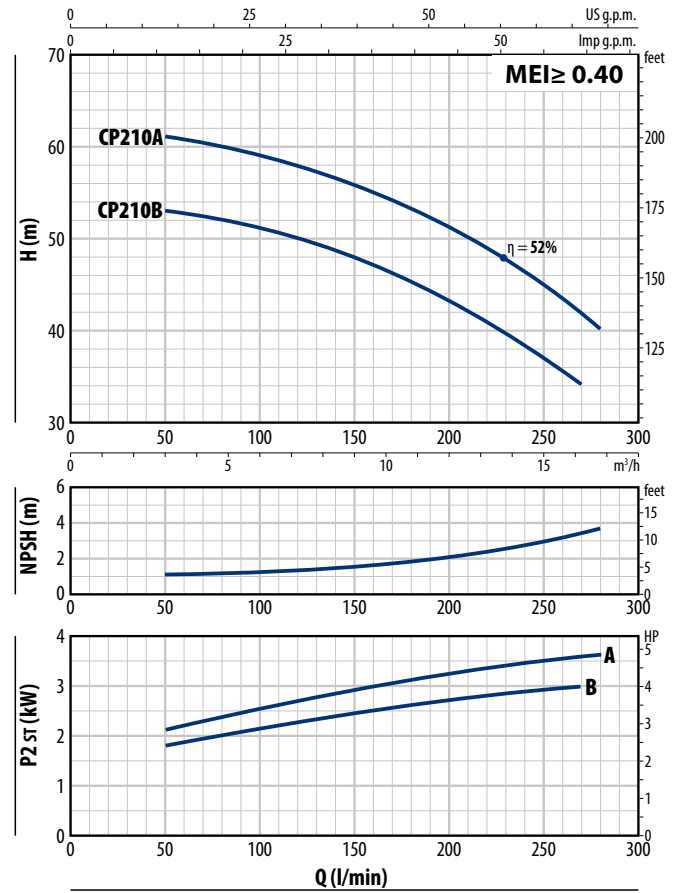

CP 160

MODEL		POWER (P2)		1~ 3~	Q	m ³ /h													
Single-phase	Three-phase	kW	HP			0	3	4.5	6	7.5	9	10.5	12	13.2	14.4				
					l/min	0	50	75	100	125	150	175	200	220	240				
CPm 160C	CP 160C	1.1	1.5	IE2 IE3	H meters	32	31	30.5	29.5	28	26	23	20						
CPm 160B	CP 160B	1.5	2			37	36	35.5	34.5	33.5	31.5	29	26.5	23					
CPm 160A	CP 160A	2.2	3			43	42	41.5	40.5	39.5	38	35.5	33	30	26				


CP 210

MODEL		POWER (P2)		3~	Q	m ³ /h													
Three-phase		kW	HP			0	3	4.5	6	7.5	9	10.5	12	13.2	14.4	15	16.2	16.8	
					l/min	0	50	75	100	125	150	175	200	220	240	250	270	280	
CP 210B		3	4	IE3	H meters	54	53	52	51	49.5	48	45.5	43	40	38.5	37	34		
CP 210A		4	5.5			61	61	60	59	57.5	56	53.5	51	49	46.5	45	42	40	

Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

CP 250

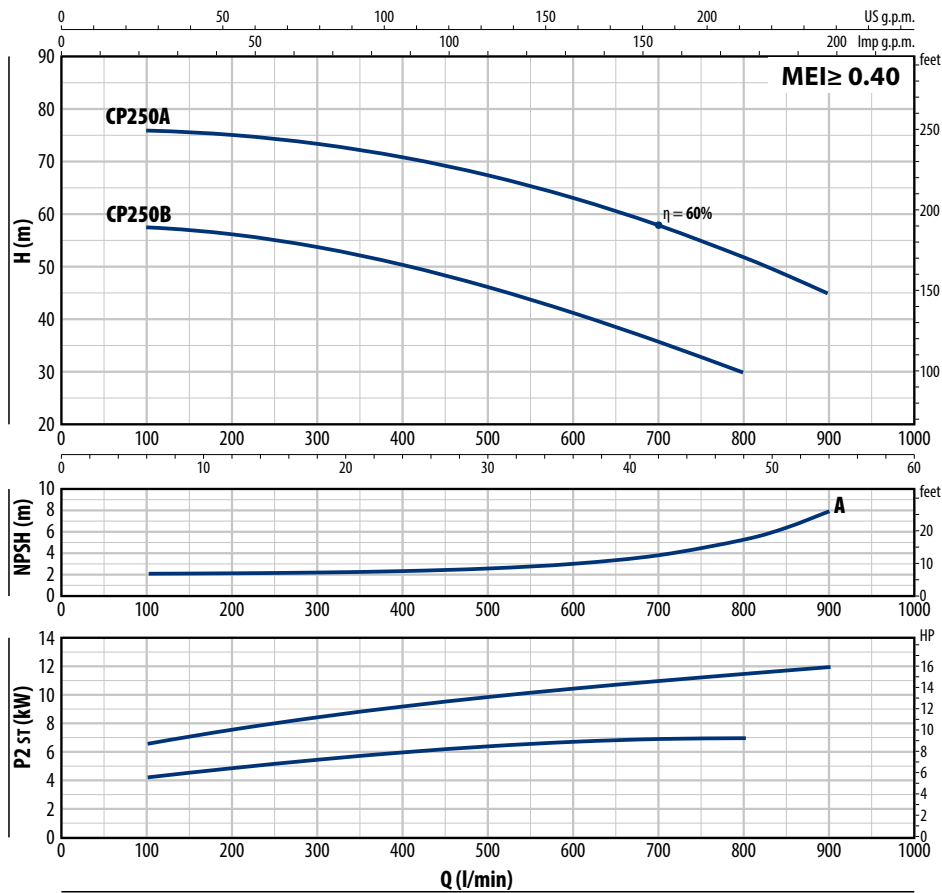

CP 250

MODEL	POWER (P ₂)		3~	Q	Flow rate (Q)													
	kW	HP			0	6	12	18	24	30	36	42	48	54				
Three-phase			IE3	H meters	0	100	200	300	400	500	600	700	800	900				
CP 250B	7.5	10			57.5	57.5	56.1	53.7	50.3	46.1	41.3	35.9	30					
CP 250A	11	15			76	76	75	73.5	71	67.5	63	58	52	45				

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION

MODEL	VOLTAGE
Single-phase	230 V
CPm 160C	8.5 A
CPm 160B	10.3 A
CPm 160A	13.0 A
CPm 220C	14.2 A

MODEL	VOLTAGE			
	230 V - Δ	400 V - Δ	400 V - Δ	690 V - Δ
Three-phase				
CP 160C	5.7 A	3.3 A	-	-
CP 160B	6.9 A	4.0 A	-	-
CP 160A	8.8 A	5.1 A	-	-
CP 210B	12.6 A	7.3 A	-	-
CP 210A	15.1 A	8.7 A	-	-
CP 220C	9.0 A	5.2 A	-	-
CP 220B	12.6 A	7.3 A	-	-
CP 220A	17.0 A	9.8 A	-	-
CP 220AH	-	-	11.5 A	6.6 A
CP 230C	13.1 A	7.6 A	-	-
CP 230B	16.8 A	9.7 A	-	-
CP 230A	-	-	11.5 A	6.6 A
CP 250B	-	-	15.0 A	8.7 A
CP 250A	-	-	22.5 A	13.0 A

DIMENSIONS AND WEIGHT

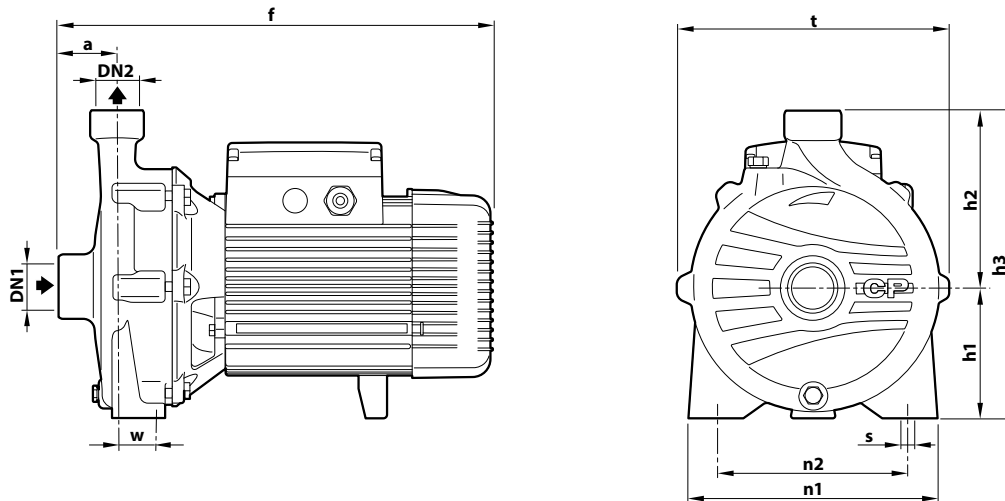

MODEL		PORTS		DIMENSIONS mm										kg	
Single-phase	Three-phase	DN1	DN2	a	f	h1	h2	h3	t	n1	n2	w	s	1~	3~
CPm 160C	CP 160C	1½"	1"	54	370	110	150	260	-	206	165	44.5	11	18.7	18.8
CPm 160B	CP 160B													20.0	20.0
CPm 160A	CP 160A													22.7	22.9
-	CP 210B			-	33.8										
-	CP 210A			-	37.2										
CPm 220C	CP 220C	2"	2"	70	428	132	183	315	243	230	170	40	14	29.5	32.3
-	CP 220B													-	34.2
-	CP 220A													-	41.0
-	CP 220AH			-	47.0										
-	CP 230C			70	468	136	192	328	273	250	190	40		-	37.2
-	CP 230B			-	-	-	-	-	-	-	-	-		-	41.0
-	CP 230A			-	-	-	-	-	-	-	-	-		-	46.0
-	CP 250B			70	515	136	192	328	273	250	190	40		-	56.0
-	CP 250A			65	570	160	232	392	317	294	230	45		-	98.0

PALLET CAPACITY

MODEL		NO. OF PUMPS
Single-phase	Three-phase	n. of pumps
CPm 160C	CP 160C	50
CPm 160B	CP 160B	50
CPm 160A	CP 160A	35
-	CP 210B	18
-	CP 210A	18

MODEL		NO. OF PUMPS
Single-phase	Three-phase	n. of pumps
CPm 220C	CP 220C	18
-	CP 220B	18
-	CP 220A	18
-	CP 220AH	18
-	CP 230C	18
-	CP 230B	18
-	CP 230A	18
-	CP 250B	18
-	CP 250A	6

CONSTRUCTION FEATURES

1 Pump body Cast iron with ISO 228/1 threaded ports

2 Cover Cast iron

3 Impeller Stainless steel for CP 160, CP 210, CP 220, CP 230, CP 250B
Cast iron for CP 250A

4 Mechanical seal	Pump	Seal	Shaft	Materials
	CP 160	FN-18	Ø 18 mm	Graphite / Ceramic / NBR
	CP 210			
	CP 220	FN-24	Ø 24 mm	Graphite / Ceramic / NBR
	CP 230			
	CP 250B			
	CP 250A	FN-32 NU	Ø 32 mm	Graphite / Ceramic / NBR

5 Motor shaft Stainless steel **AISI 431**

6 Electric motor **CPm:** single-phase 230 V - 50 Hz.
CP: three-phase 230/400 V - 50 Hz up to 4 kW.
400/690 V - 50 Hz from 5.5 to 11 kW.
✳ Pumps are equipped with high-efficiency motors (IEC 60034-30-1)
class **IE2** for single-phase models
class **IE3** for three-phase models
Continuous running duty **S1**

