


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	8
LOWER	1	3
"	1.5	2
"	3	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

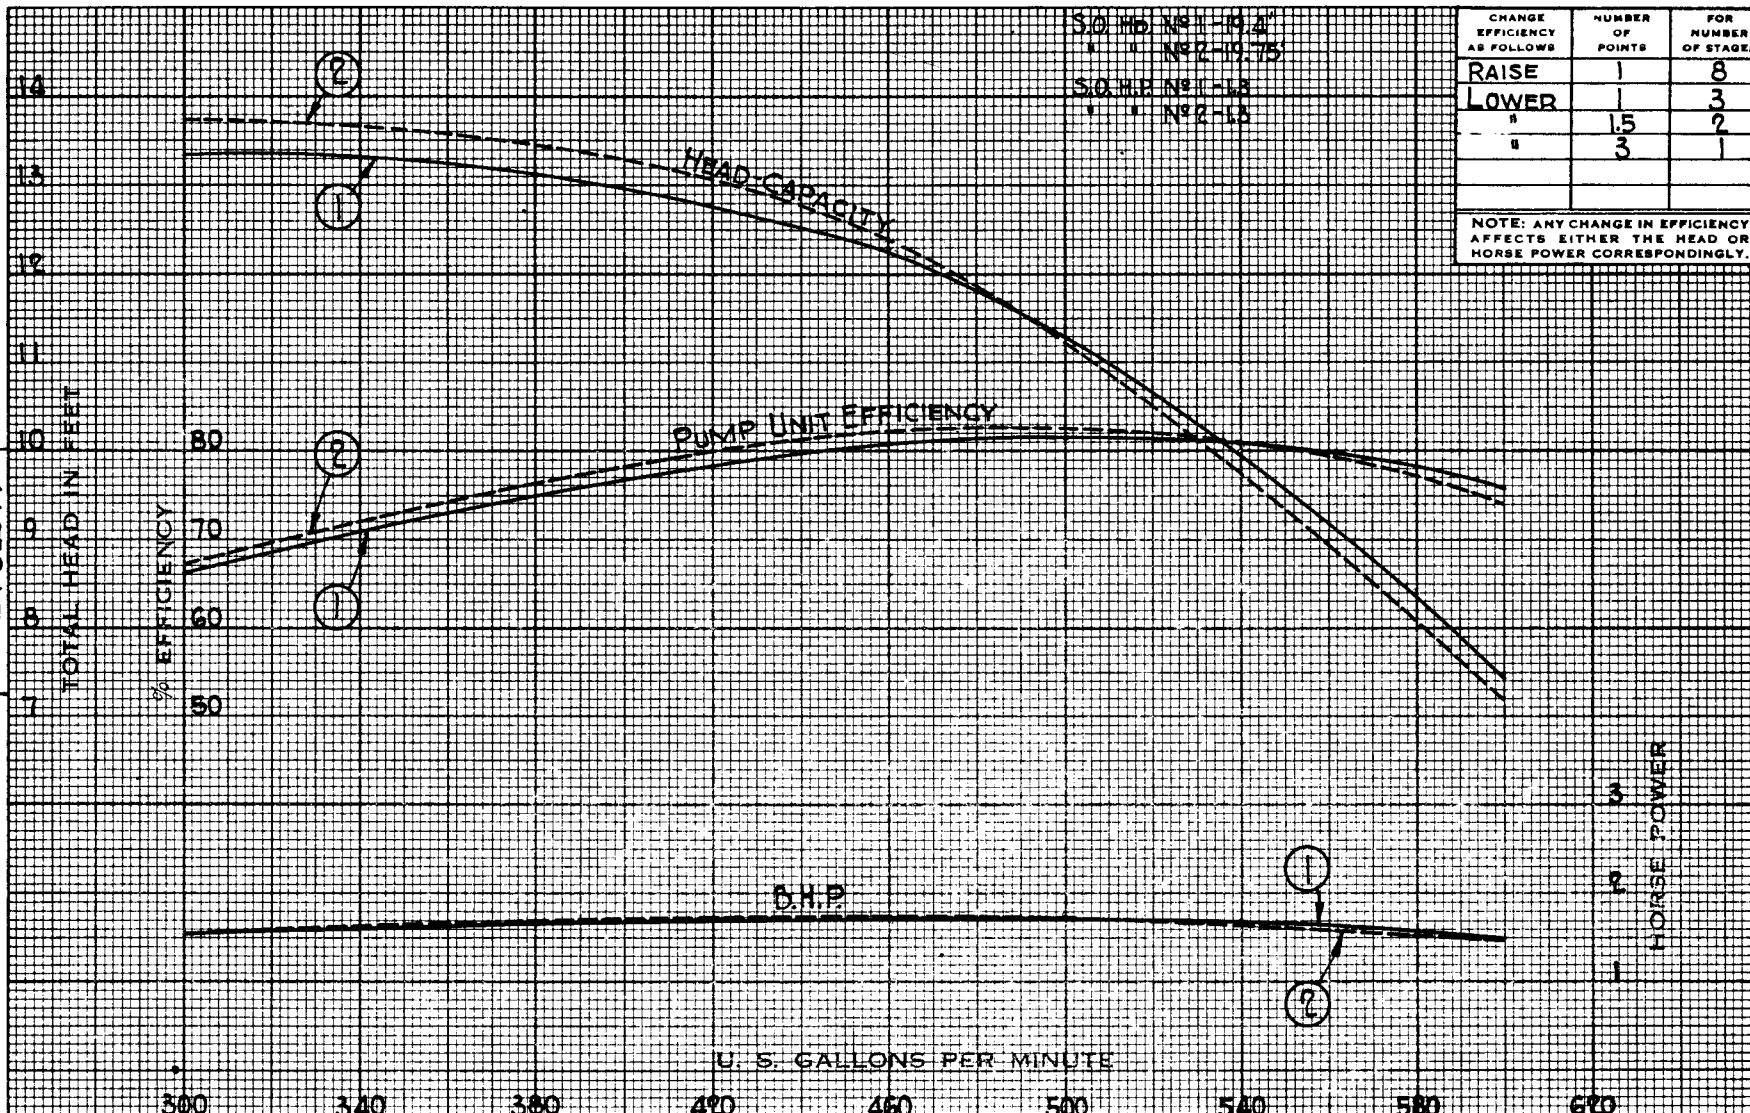

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	PEERLESS PUMP DIVISION FOOD MACHINERY CORPORATION LOS ANGELES 31, CALIF.	PERFORMANCE PER STAGE 10" H X X 1160 R. P. M.
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRAISIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	1	T-82337	6 1/4" x 7 1/8"	3920 2545		DEEP WELL TURBINE PUMP SHEET NO. R-1009
	2	T-82337-E	6 1/4" x 7 1/8"	3920		
	3					