


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	8
LOWER	1	4

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

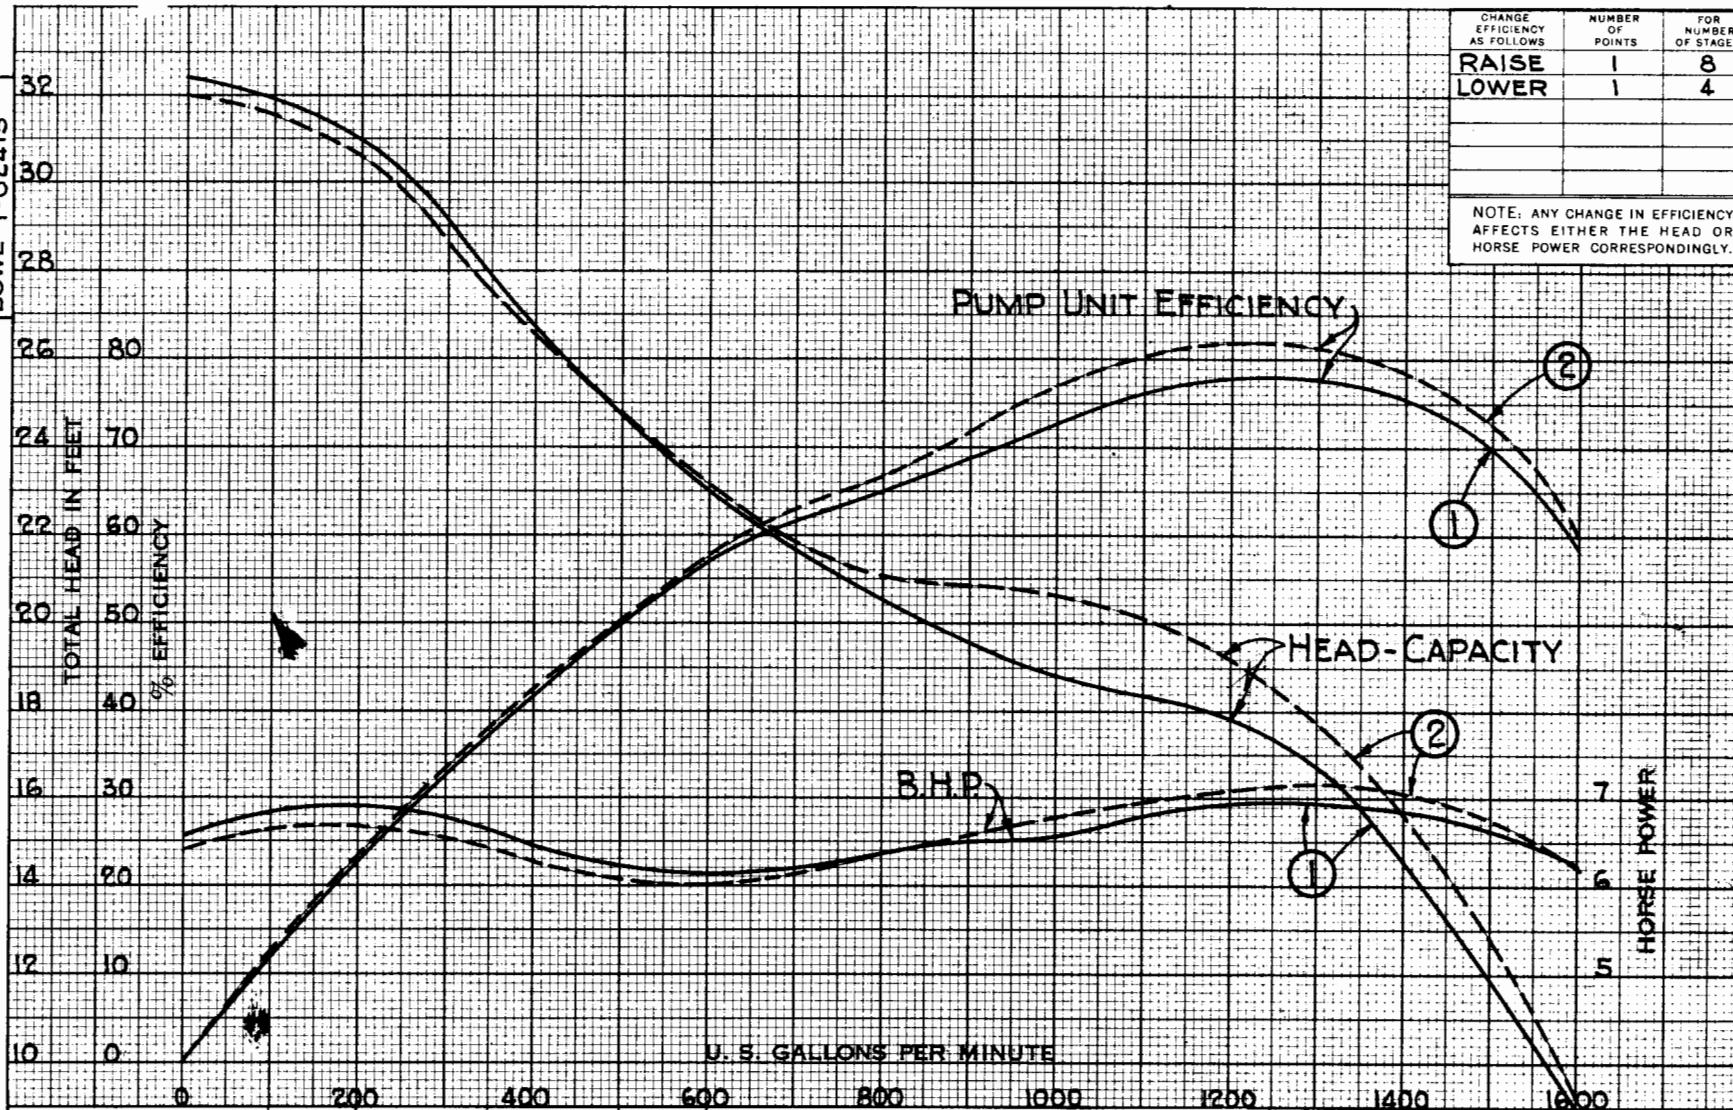

BOWL T-82415

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.	1	T-82416	7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ "	T-2516
	2	T-82416 E	7 $\frac{3}{8}$ " x 8 $\frac{7}{8}$ "	T-2527
	3			

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.



PERFORMANCE PER STAGE

12" HXA

DEEP WELL
TURBINE PUMP

1160

R. P. M.

SHEET NO. R-458A

PRINTED IN U. S. A.