



A Sterling Company

VERTICAL TURBINE PUMPS


Section 140
11-82+

stages _____ of horsepower

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	3
"	2	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

Total Head in Feet for _____ Stages

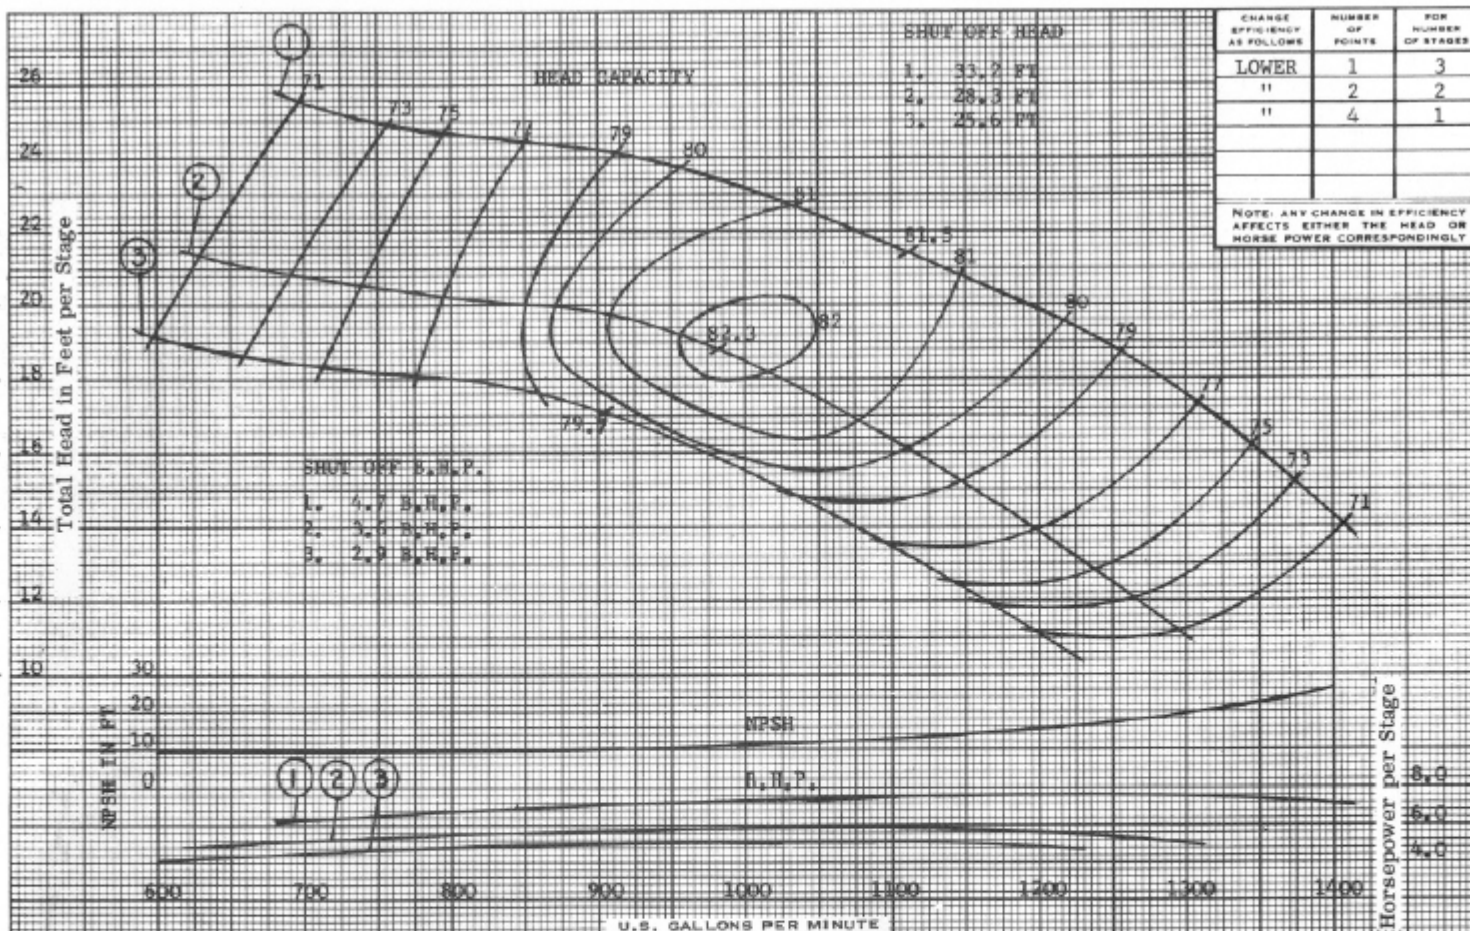

HYDRAULIC PERFORMANCE WARRANTY	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____
Guaranteed at designated point only, and contingent on:	1	2608368	8 ¹ / ₁₆ " x 9 ¹ / ₄ "	42388	Item _____
Proper flow to pump suction	2	2608368	7 ¹¹ / ₁₆ " x 8 ¹³ / ₁₆ "	37204	Peerless Ref. No: _____
Proper submergence	3	2608368	7 ¹⁵ / ₃₂ " x 8 ⁹ / ₁₆ "	30907	Laboratory Performance
Fluid free of gas, air & abrasives	4				SIZE 12 HXB RPM 1160
Proper lateral setting of impeller					CURVE 2844764

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED BOWL ☐ PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____
FIELD ☐